

STRUCTURAL DRAWING

266 MORRO AVE

GENERAL NOTES:

- THE FOLLOWING SPECIFICATIONS ARE TO SERVE AS AN OUTLINE OF MINIMUM MATERIAL REQUIREMENTS AND THEIR APPLICATION. MANUFACTURER'S SPECIFICATIONS AND BUILDING CODE REQUIREMENTS ARE TO GOVERN WHERE SHOWN TO EXCEED THE REQUIREMENTS SPECIFIED HEREIN. THE CONTRACTOR IS RESPONSIBLE FOR THE REVIEW AND SUBMISSION OF ALL SHOP DRAWINGS AND IS OBLIGATED TO REPORT ANY DOCUMENT DISCREPANCIES TO THE STRUCTURAL ENGINEER AND ARCHITECT PRIOR TO FABRICATION AND ERECTION OF RELATED ELEMENTS.
- THESE DRAWINGS REPRESENT STRUCTURAL COMPONENTS IN THEIR FINISHED STATE AND ARE MEANT TO SERVE AS A GRAPHICAL GUIDE TO THEIR INSTALLATION. THE GENERAL CONTRACTOR OR SUBCONTRACTOR CHARGED WITH DOING THE WORK IS RESPONSIBLE FOR THE EXECUTION OF ADEQUATE CONSTRUCTION PROCEDURES, METHODS, SAFETY PRECAUTIONS OR MECHANICAL REQUIREMENTS UTILIZED IN THE ASSEMBLY OF THE AFOREMENTIONED COMPONENTS.
- USE OF THIS CONSTRUCTION DOCUMENT IS RESTRICTED TO THIS PROJECT ONLY.
- THESE DRAWINGS SHALL NOT BE SCALED. ANY DISCREPANCIES BETWEEN THESE AND ARCHITECTURAL SET SHALL BE REPORTED TO THE ARCHITECT IMMEDIATELY. REFER TO ARCHITECTURAL SET FOR LOCATION OF DOOR & WINDOW OPENINGS.
- ALL STRUCTURAL DRAWINGS SHALL BE THOROUGHLY REVIEWED BY THE CONTRACTOR. ANY CONDITIONS THAT REQUIRE CHANGES FROM THE STRUCTURAL DRAWINGS SHALL BE COMMUNICATED TO THE ARCHITECT FOR HIS APPROVAL PRIOR TO BIDDING AND ALL COSTS OF THOSE CHANGES MUST BE INCLUDED IN THE BID PRICE.
- REUSE OF SALVAGED MATERIALS IS NOT PERMITTED. DEFICIENT WORK SHALL BE REPLACED OR REPAIRED, AS DETERMINED BY THE ENGINEER

DIVISION 02 - SITE WORK

A. GENERAL:

- CONTRACTOR SHALL RAISE THE EXISTING SITE AS REQUIRED TO MEET THE FLOOR LEVELS PRESCRIBED BY THE PROJECT ARCHITECT.
- CONTRACTOR SHALL PLACE ALL SLABS ON GRADE ON A MINIMUM OF 1'-0" OF ENGINEERED FILL. ENGINEERED FILL TO BE PLACED, COMPACTED AND TESTED.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONDUCTING SOIL DENSITY TESTING BY A QUALIFIED TECHNICIAN TO ALL ENGINEERED FILL FALLING WITHIN THE BUILDING FOOT PRINT. TESTING SHALL BE CONDUCTED AT TWO (2) LOCATIONS AT EACH 12" INTERVALS. CONTRACTOR SHALL SUPPLY THE RESULTS TO THE ENGINEER OF RECORD (EOR). FOUNDATION OR SLAB REINFORCING STEEL OR CONCRETE SHALL NOT BE PLACED WITHOUT THE CONSENT OF THE EOR.
- SHORING, BRACING & PROTECTION OF EXISTING & ADJACENT STRUCTURES DURING CONSTRUCTION IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
- FINAL SOIL DENSITY FOR ALL ENGINEERED FILL SHALL BE GREATER THAN 95% DRY DENSITY

DIVISION 03 - CONCRETE

A. GENERAL:

- ALL CONCRETE WORK SHALL CONFORM TO THE LATEST ACI 318/ 318R "BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE AND COMMENTARY," IN CONJUNCTION WITH ACI 301 "SPECIFICATIONS FOR STRUCTURAL CONCRETE"
- PORTLAND CEMENT SHALL CONFORM TO ASTM C150 TYPE II - MODERATE SULFATE RESISTANT. WATER/CEMENT RATIO = 0.55 MAX. MINIMUM COURSE AGGREGATE SIZE TO BE 3/4"
- MINIMUM CONCRETE STRENGTH IN PSI SHALL BE AS FOLLOWS :

28 DAY STRENGTH IN MAIN BUILDING POURED WALLS	4000
28 DAY STRENGTH IN ALL POURED FOOTINGS	3000
28 DAY STRENGTH IN MAIN BUILDING POURED COLUMNS	4500
28 DAY STRENGTH IN MAIN BUILDING SLABS	3000
- PROTECTIVE CONCRETE COVER TO REINFORCING STEEL SHALL BE AS FOLLOWS (UNLESS NOTED OTHERWISE):

FOOTINGS (CAST AGAINST EARTH)	3"
RETAINING WALLS (CAST AGAINST EARTH)	3"
FOUNDATION WALLS EXPOSED TO EARTH COLUMNS (#10 AND SMALLER)	2"
BEAMS	1 12"
SUSPENDED SLABS AND WALLS (#6 AND SMALLER)	1 12"
	3 4"
- NO CONCRETE ADMIXTURES SHALL BE USED UNLESS APPROVED BY STRUCTURAL ENGINEER.
- FOOTINGS ARE DESIGNED TO BEAR ON SOIL WITH MIN. 2500 P.S.F. ALLOWABLE BEARING PRESSURE. THE STRUCTURAL ENGINEER SHOULD BE NOTIFIED IMMEDIATELY UPON ENCOUNTERING QUESTIONABLE SOIL.
- EXCAVATIONS FOR FOOTINGS SHALL BE NEAT AND FREE FROM TRASH AND DELETERIOUS MATERIAL
- FOOTINGS AND WALLS SHALL BE INSPECTED BY STRUCTURAL ENGINEER PRIOR TO POURING CONCRETE. A MINIMUM NOTICE OF 48 HOURS IS REQUIRED.
- DETAILING, FABRICATION AND PLACING OF REINFORCING STEEL SHALL CONFORM TO "ACI 315 " ACI DETAILING MANUAL.
- REINFORCEMENT SHALL BE AS FOLLOWS:

REINFORCING BARS # 4 AND LARGER TO CONFORM TO ASTM A-615 GRADE 60(60,000 PSI YIELD)
#3 BARS TO CONFORM TO ASTM A-615 GRADE 40(40,000 PSI YIELD)
- ALL REINFORCING STEEL DESIGNATED AS "CONTINUOUS" SHALL BE LAPPED AS FOLLOWS:

#5 OR SMALLER - 30"
#6 - 36"
#7 - 42"
#8 - 48"
- WALL AND COLUMN STARTER BARS SHALL COMPLY WITH THE ABOVE. SPLICING OR LAPPING OF REINFORCEMENT STEEL WITHIN COLUMNS AND BEAMS IS STRICTLY PROHIBITED WITHOUT PRIOR CONSENT FROM THE EOR

- LAPS AT CORNERS AND INTERSECTIONS SHOULD BE MADE WITH A STANDARD 90° BEND AND WELDED WIRE MESH SHOULD BE LAPPED ONE FULL MESH (6") AT SIDE AND END LAPS.
- BOTTOM BARS TO BE LAPPED AT SUPPORTS, TOP BARS TO BE LAPPED AT CENTER SPAN.
 - ALL RETAINING WALLS TO BE ADEQUATELY SHORED UNTIL UPPER SLAB IS IN PLACE AND HAS REACHED 70 % OF ITS DESIGN STRENGTH OR THE RETAINING WALL HAS REACHED 100% OF IT'S DESIGN STRENGTH.
 - ALL SUSPENDED SLABS SHALL BE POURED MONOLITHICALLY W/ THEIR SUPPORT BEAMS.
 - SUPPORT OF REBARS USING ROCKS TO PROVIDE COVER REQUIREMENTS IS STRICTLY PROHIBITED. PROPER STEEL CHAIRS ARE REQUIRED. CONTRACTOR SHALL SEEK APPROVAL OF METHOD OF REBAR SUPPORT AND SPACING CONTROL FROM THE EOR PRIOR TO INSTALLATION.
 - PROPER CONCRETE CURING METHODS SHALL BE CONDUCTED AS PER ACI 308, STANDARD PRACTICE FOR CURING CONCRETE.
 - REFER TO ARCHITECTURAL, MECHANICAL AND ELECTRICAL DRAWINGS FOR ANY ADDITIONAL SLEEVES AND OPENINGS OMITTED FROM STRUCTURAL DRAWINGS. ENGINEER MUST BE NOTIFIED PRIOR TO PENETRATING ANY STRUCTURAL ELEMENTS NOT SHOWING OPENINGS IN THESE DOCUMENTS.
 - ALL CONCRETE SLABS ON GRADE TO BE PLACED ON MINIMUM OF 1'-0" ENGINEER - APPROVED FILL FREE FROM TRASH, LARGE ROCKS, ORGANICS AND DELETERIOUS MATERIAL. FILL TO BE PLACED AND COMPACTED IN 12 INCH MAX LIFTS BY MECHANICAL MEANS.
 - WELDED WIRE FABRIC REINFORCEMENT TO BE FLAT SHEET TYPE. FLATTENING OF ROLL TYPE REINFORCEMENT IS NOT PERMITTED. WELDED WIRE FABRIC REINFORCEMENT IN SLAB ON GRADE SHALL BE SUPPORTED BY STEEL SUPPORTS WITH BASEPLATES OR BY CONCRETE BLOCKS TO PREVENT PENETRATION OF VAPOUR BARRIER. WWF IN SLABS ON DECK MAY BE SUPPORTED BY CONTINUOUS TYPE REINFORCEMENT. SUPPORTS SHALL SHALL BE SPACED AT 2'-6" o/c. MAXIMUM. "HOOKING" OR "WALKING" OF WWF IS NOT PERMITTED
 - ALL FORMWORK SURFACES SHALL BE TREATED WITH APPLICABLE FORMWORK RELEASE AGENT PRIOR TO POURING CONCRETE. SELECTED RELEASE AGENT SHALL EFFECTIVELY PROTECT AGAINST BOND WITH CONCRETE AND ABSORPTION OF MOISTURE BY FORMWORK. CONTRACTOR SHALL SUBMIT PRODUCT SPECIFICATIONS PRIOR TO CONSTRUCTION OF FORMWORK.
 - SAMPLES FOR STRENGTH TESTS OF EACH CLASS OF CONCRETE SHALL BE TAKEN NOT LESS THAN ONCE PER DAY, NOR LESS THAN ONCE FOR EACH 150 CUBIC YARDS, NOR LESS THAN ONCE FOR EACH 5000 SQ. FT. OF SURFACE AREA FOR WALLS AND SLABS. CYLINDERS FOR STRENGTH TESTS SHALL BE MOLDED AND LABORATORY-CURED IN ACCORDANCE WITH ASTM-C 31 AND TESTED IN ACCORDANCE WITH ASTM C 39.
 - WALL FORMWORK TO REMAIN IN PLACE FOR A PERIOD OF 7 DAYS. SHOULD THE CONTRACTOR WISH TO REMOVE THE FORMWORK EARLIER A PROCEDURE FOR CURING THE CONCRETE SHALL BE ISSUED TO THE EOR FOR APPROVAL PRIOR TO CONCRETE PLACEMENT.
 - SLABS (ON GRADE OR SUSPENDED) TO BE CONTINUOUSLY MOIST CURED FOR A PERIOD OF 7 DAYS OR BE TREATED WITH A CURING COMPOUND. CONTRACTOR SHALL SUBMIT SPECIFICATIONS FOR CURING COMPOUND PRIOR TO PLACEMENT OF CONCRETE.
 - WELDING OF STEEL REINFORCEMENT IS STRICTLY PROHIBITED WITHOUT PRIOR APPROVAL FROM THE EOR.
 - CAST IN PLACE CONCRETE SLAB FALSEWORK TO REMAIN IN PLACE UNTIL THE SLAB HAS REACHED 75% OF ITS DESIGN STRENGTH. THE SLAB SHALL NOT BE LOADED UNTIL THE CONCRETE HAS REACHED 100% OF ITS DESIGN STRENGTH. CONTRACTOR SHALL SUBMIT ENGINEERED FALSEWORK PLANS FOR REVIEW BY THE EOR PRIOR TO CONCRETE PLACEMENT.
 - SUSPENDED SLAB SYSTEMS TEMPORARILY SUPPORTED BY A LOWER SUSPENDED SLAB SYSTEM SHALL HAVE THE LOWER SLAB RESHORED UNTIL SUCH TIME THE UPPER SLAB SHORING CAN BE REMOVED. CONTRACTOR SHALL SUBMIT ENGINEERED TEMPORARY RESHORING PLANS TO THE EOR FOR APPROVAL PRIOR TO DECK INSTALLATION.
 - THE CONTRACTOR SHALL SLEEVE ALL UTILITY PENETRATIONS PRIOR TO CONCRETE PLACEMENT WHERE POSSIBLE. CONTRACTOR SHALL OBTAIN APPROVAL FROM THE EOR FOR SLEEVE BANKS (MORE THAN TWO SLEEVES OR SLEEVES LARGER THAN 4"Ø) PRIOR TO PLACEMENT.
 - WHERE IT IS NECESSARY TO CORE DRILL STRUCTURAL CONCRETE ELEMENTS, CONTRACTOR SHALL OBTAIN APPROVAL BY THE EOR AS FOLLOWS:
 - WALL PENETRATIONS LARGER THAN TWO ADJACENT HOLES OR LARGER THAN 4"Ø
 - ALL SLAB, BEAM AND COLUMN PENETRATIONS
 - LOCATION OF ALL CONSTRUCTION JOINTS NOT SHOWN IN DRAWINGS SHALL BE SUBMITTED TO STRUCTURAL ENGINEER FOR APPROVAL PRIOR TO DETAILING OF REINFORCING.

DIVISION 4 - MASONRY

- ALL MASONRY MATERIALS AND CONSTRUCTION SHALL CONFORM TO THE RECOMMENDATIONS OF THE BRICK INSTITUTE OF AMERICA(BIA), NATIONAL CONCRETE MASONRY ASSOCIATION (NCMA), MASONRY INSTITUTE OF AMERICA(MIA) AND MINIMUM REQUIREMENTS AS SET FORTH IN THE BAHAMAS BUILDING CODE LATEST EDITION.
- ALL CONCRETE MASONRY UNITS (CMU) SHALL BE GRADE N WITH MINIMUM 1500 PSI. COMPRESSIVE STRENGTH.
- ALL MORTAR NOT SPECIFIED BELOW TO BE IN COMPLIANCE WITH THE STANDARD SPECIFICATION FOR MORTAR OF MASONRY UNITS, ASTM C270
- MORTAR USED TO BOND UNIT MASONRY SHALL HAVE THE FOLLOWING MIN. AVG. STRENGTH:

TYPE M	2500 PSI
TYPE S	1800 PSI
TYPE N	750 PSI
- MORTAR TYPE USED TO BE DEPENDENT ON LOCATION AS FOLLOWS:

BELOW GRADE FOUNDATION AND WALLS	TYPE M
RETAINING WALLS	TYPE M
FIRE-RESISTIVE WALLS (RATED 2 HRS OR MORE)	TYPE M OR S
EXTERIOR WALLS AND LOAD-BEARING WALLS	TYPE M OR S
PARTITIONS	TYPE M, S OR N
MORTAR OR GROUT UNDER CONCENTRATED LOADS	TYPE M
- LINTEL BEAMS TO HAVE A MINIMUM 8" BEARING ON EITHER SIDE OF OPENING. BLOCK CELLS SHALL BE FILLED SOLID W/ CONCRETE AND REINF. W/ (1) #5 ADJACENT TO ALL OPENINGS. U.N.O.
- FOUNDATION STEM WALLS 3 - 5 COURSES HIGH SHALL BE REINFORCED w/ #4 VERT @ 24"cc WITH REINFORCED CELLS GROUT FILLED SOLID. ALL VERT STEEL SHALL BE SPLICED 16" MIN. WITH A #4 CAST INTO THE FOOTING AS WELL AS A #4 L BAR EXTENDING FROM THE TOP OF THE STEM WALL BENT INTO THE SLAB ON GRADE. STEM WALLS MORE THAN 5 COURSES SHALL BE REVIEWED BY EOR PRIOR TO CONSTRUCTION. CONTRACTOR SHAL NOTIFY EOR IN SUCH INSTANCES

DIVISION 5 - WOOD

A. WOOD FRAMING NOTES:

- A) PLYWOOD ROOF SHEATHING TO BE 3/4" EXPOSURE UNLESS NOTED OTHERWISE.
- B) PLYWOOD PANELS TO BE NAILED TO SUPPORTS WITH 6D COMMON NAILS FOR 1/2" THICK PANELS AND 8D COMMON NAILS FOR 5/8" , 3/4" AND 1" THICK PANELS.
- C) NAIL SPACING SHALL BE AT 4" O/C FOR 6'-0" WIDE STRIP ALONG ALL PANEL EDGES AND RIDGE AND 6" O/C AT INTERMEDIATE SUPPORTS.
- ALL NAILS OTHER THAN THOSE USED FOR APPLICATION OF GYPSUM BOARD SHALL CONFORM TO MINIMUM DIMENSIONS AND TOLERANCE SPECIFIED IN ASTM F 1667
- "STANDARD SPECIFICATION FOR DRIVEN FASTENERS: NAILS, SPIKES AND STAPLES."
- FASTENERS FOR PRESSURE - PRESERVATIVE - TREATED WOOD OR FIRE - RETARDANT - TREATED WOOD SHALL BE OF HOT - DIPPED OR ZINC-COATED GALVANIZED STEEL. WOOD TREATMENT MUST BE VERIFIED TO ENSURE COMPATIBILITY W/ GALVANIZED METAL PRODUCTS. INSTALL FASTENERS WITHOUT SPLITTING OF WOOD; PREDRILL AS REQUIRED.
- ALL METAL CONNECTORS SHALL BE HOT DIP GALVANIZED TO G90 AT A MINIMUM. ADDITIONAL CORROSION RESISTANCE MAY BE PROVIDED BY ADDITIONAL ZINC COATING SUCH AS SIMPSON Z-MAX TRIPLE ZINC COATING. STAINLESS STEEL PRODUCTS SHALL BE USED WITH ENGINEER'S APPROVAL ONLY. STAINLESS STEEL NAILS MUST BE USED WHERE STAINLESS STEEL CONNECTORS ARE UTILIZED.
- SIZE AND NUMBER OF NAILS USED IN CONNECTORS SHALL BE IN STRICT CONFORMANCE WITH MANUFACTURE'S INSTRUCTIONS.
- ALL LUMBER SHALL BE STAMPED WITH THE MARK OF AN APPROVED TESTING AGENCY.
- ALL WOOD IN CONTACT WITH CONCRETE OR EXPOSED TO WEATHER SHALL BE TREATED LUMBER IN ACCORDANCE WITH SECTION 6.0 - PRESERVATIVE TREATMENT.
- ALL WOOD FRAMING MEMBERS TO BE NO.2 SOUTHERN PINE UNLESS NOTED OTHERWISE.
- UNLESS NOTED OTHERWISE ALL WOOD STUD WALL FRAMING TO BE LATERALLY BRACED AT MID HEIGHT W/ 2" THICK WOOD BLOCKING OF WIDTH EQUIVALENT TO VERTICAL FRAMING MEMBERS. (THIS NOTE DOES NOT APPLY TO EXPOSED STUD FRAMED WALLS

DRAWING LIST	
Sheet Number	Sheet Name
S1	FOUNDATION PLAN
S2	SLAB PLAN
S3	FIRST FLOOR FRAMING PLAN
S4	WALL AND DECK FRAMING PLAN
S5.1	WALL BRACING
S5.2	WALL BRACING TABLE
S6	ROOF FRAMING
S7	WALL DETAILS A
S8	WALL DETAILS B
S9	WALL DETAILS C
S10	WALL DETAILS D
S11	DETAILS E
S12	DETAILS F

DESIGN LOADS	
SOIL BEARING PRESSURE	2000 PSF
FLOOR LOADS -	
FIRST FLOOR	
LIVE LOAD	40 PSF
DEAD LOAD	20 PSF
ROOF LOAD (MINIMUM DESIGN LOADS)	
LIVE LOAD	20 PSF
DEAD LOAD	15 PSF

APPLICABLE CODES:

- INTERNATIONAL BUILDING CODE - IBC
- INTERNATIONAL RESIDENTIAL CODE - IRC
- BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE - ACI 318-19
- AMERICAN SOCIETY OF CIVIL ENGINEERING - ASCE 7
- NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION - NDS
- ASTM STANDARDS

CLIENT

266 MORRO AVE

NOTES:

ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED


DRAWING NAME

STRUCTURAL DRAWINGS




Project number	J-1497
Date	28 JAN - 2026
Drawn by	ARI
Checked by	AZ

S00

Scale

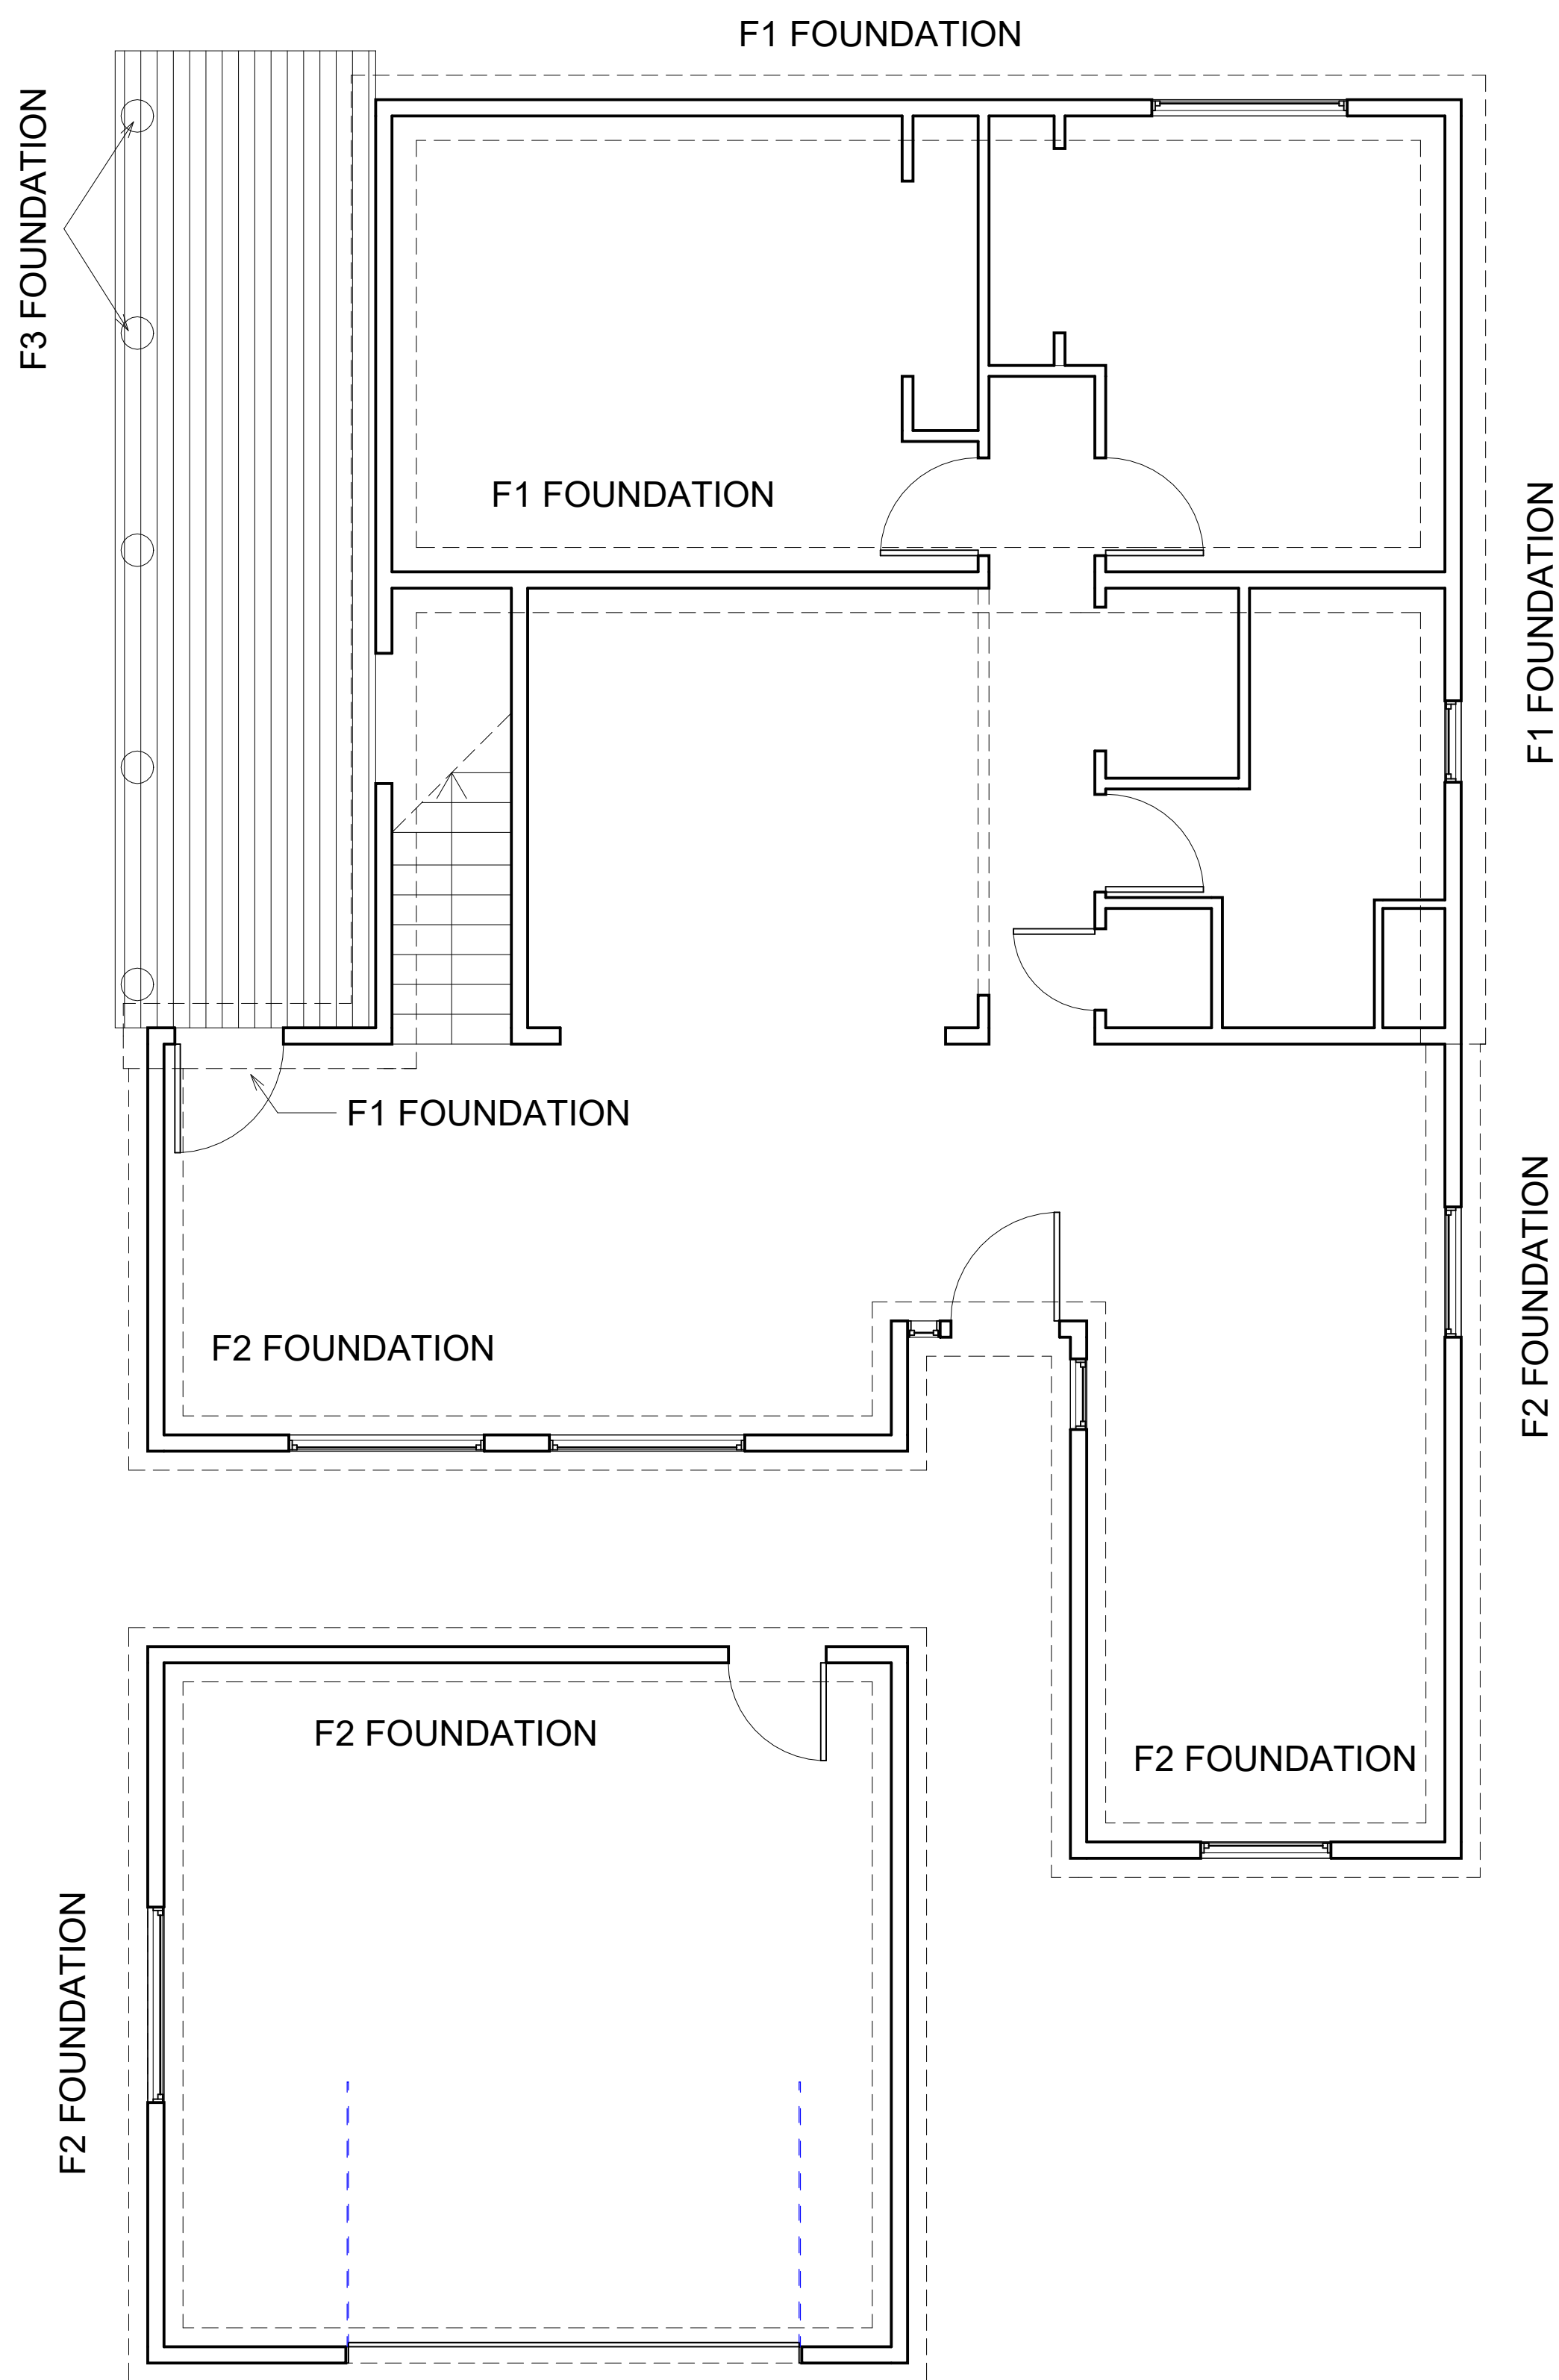

1 FOUNDATION PLAN
1/4" = 1'-0"

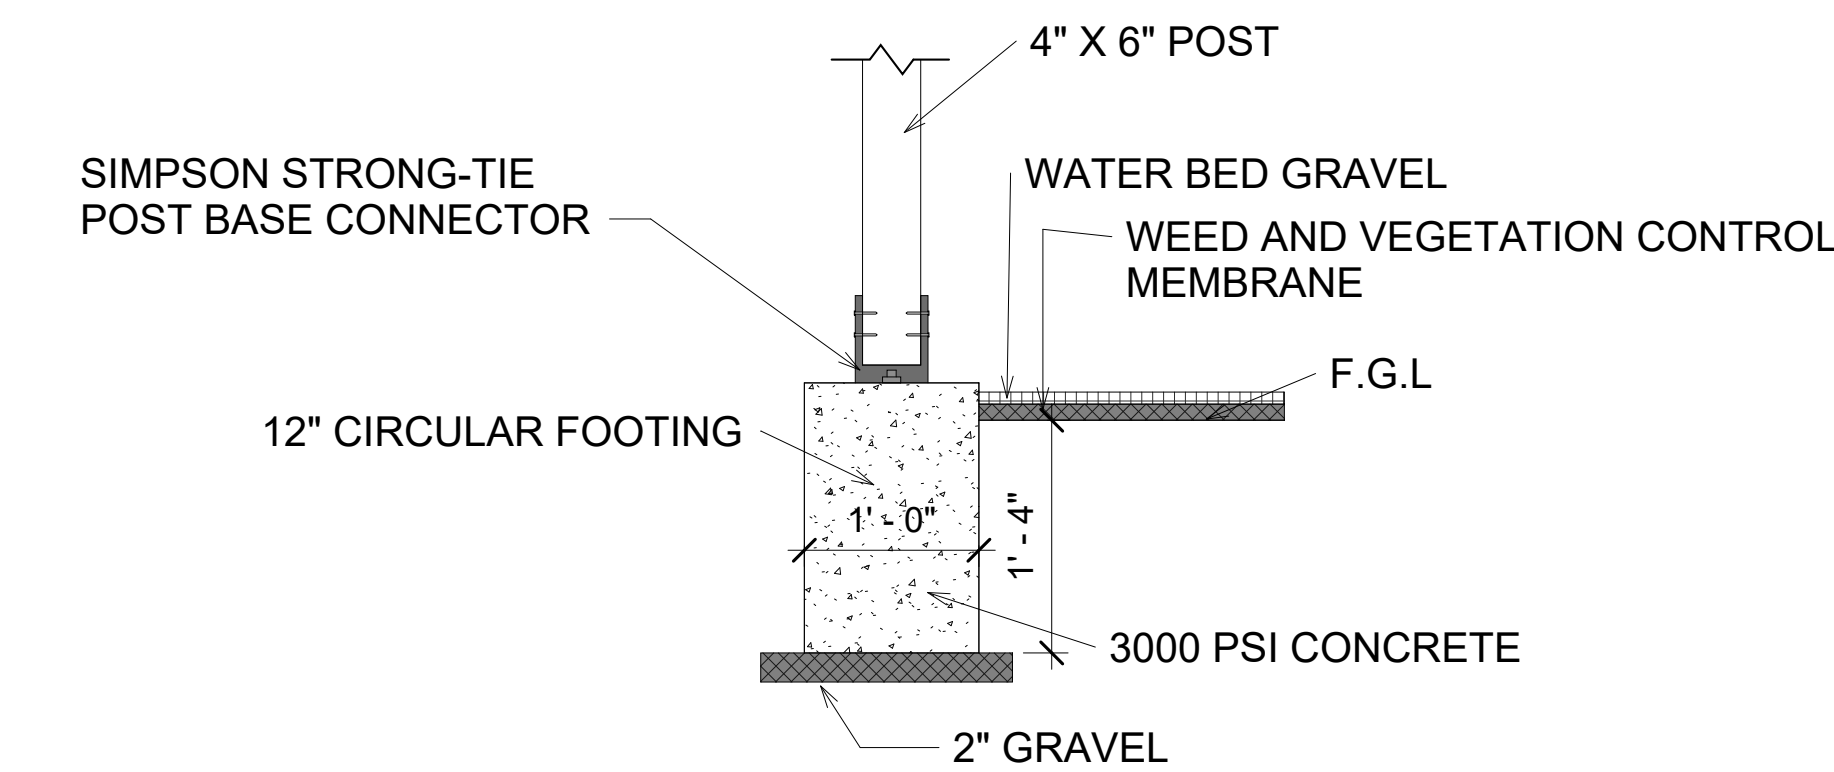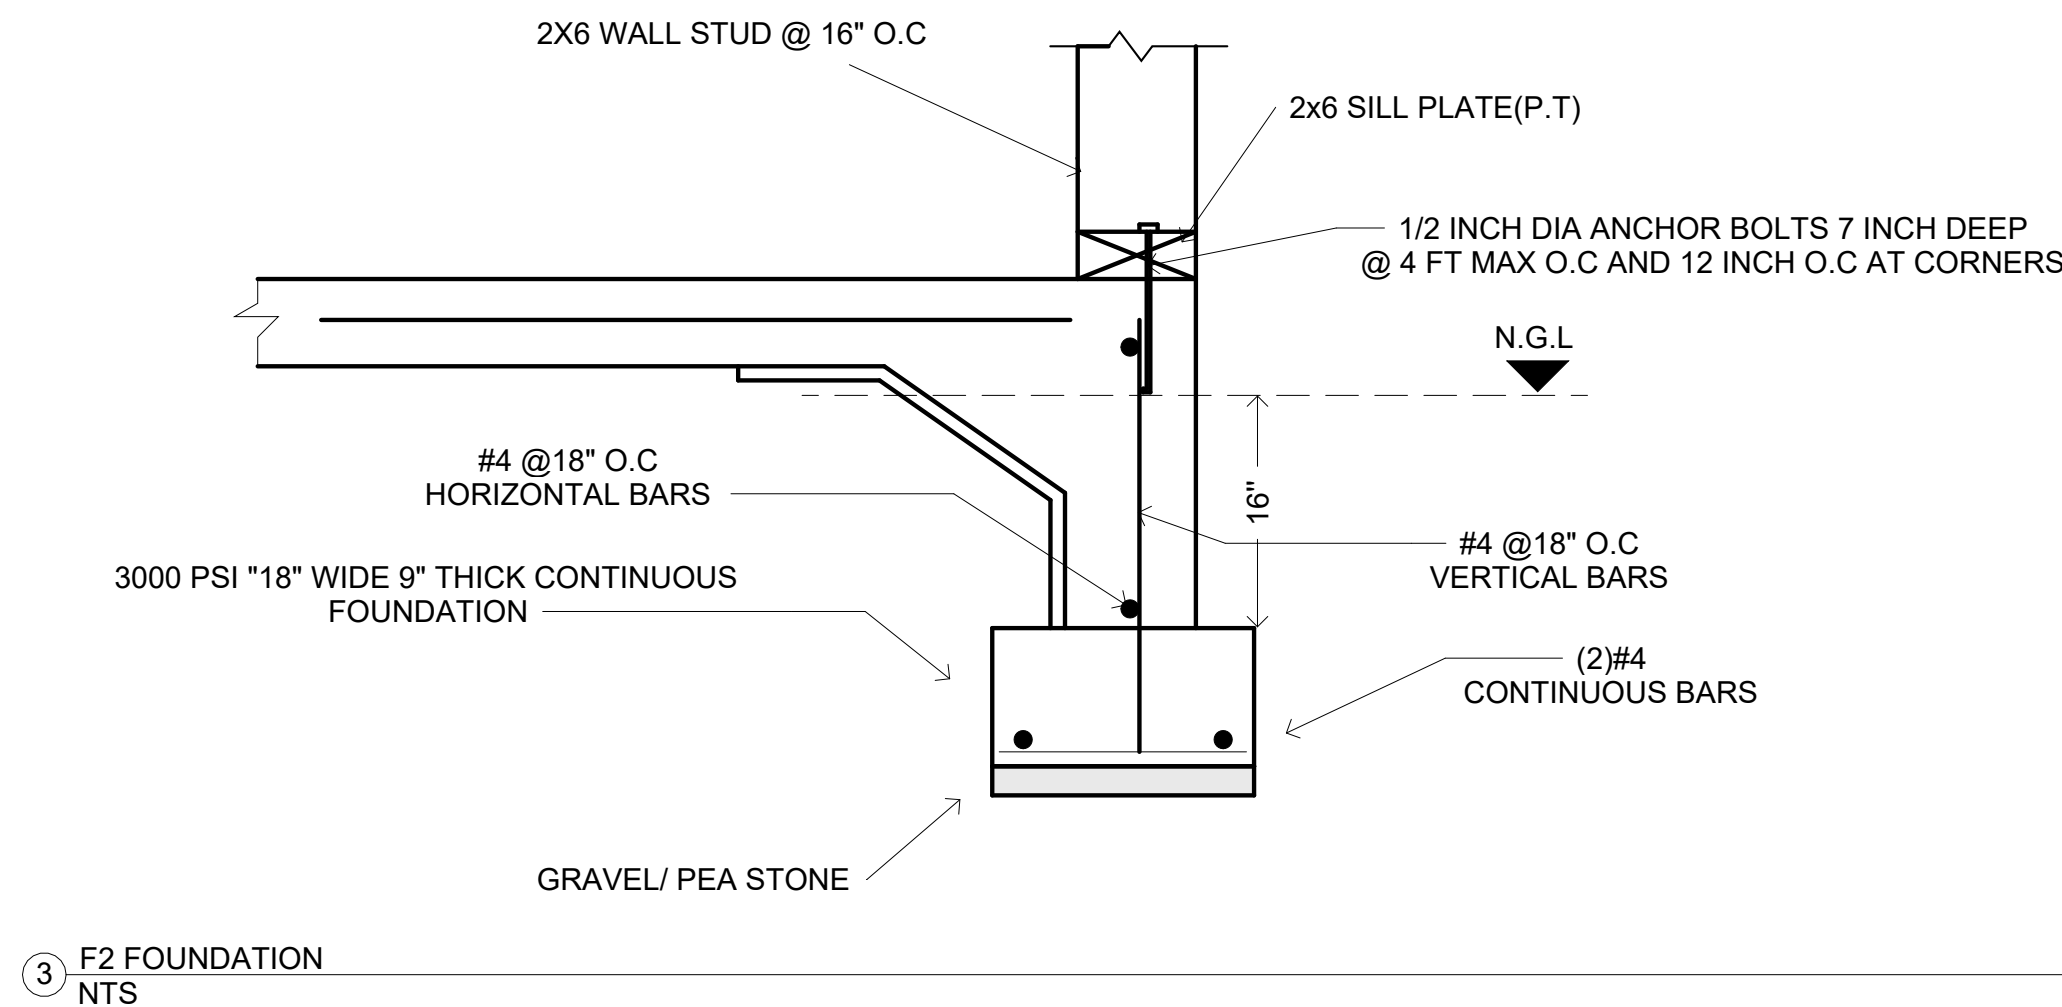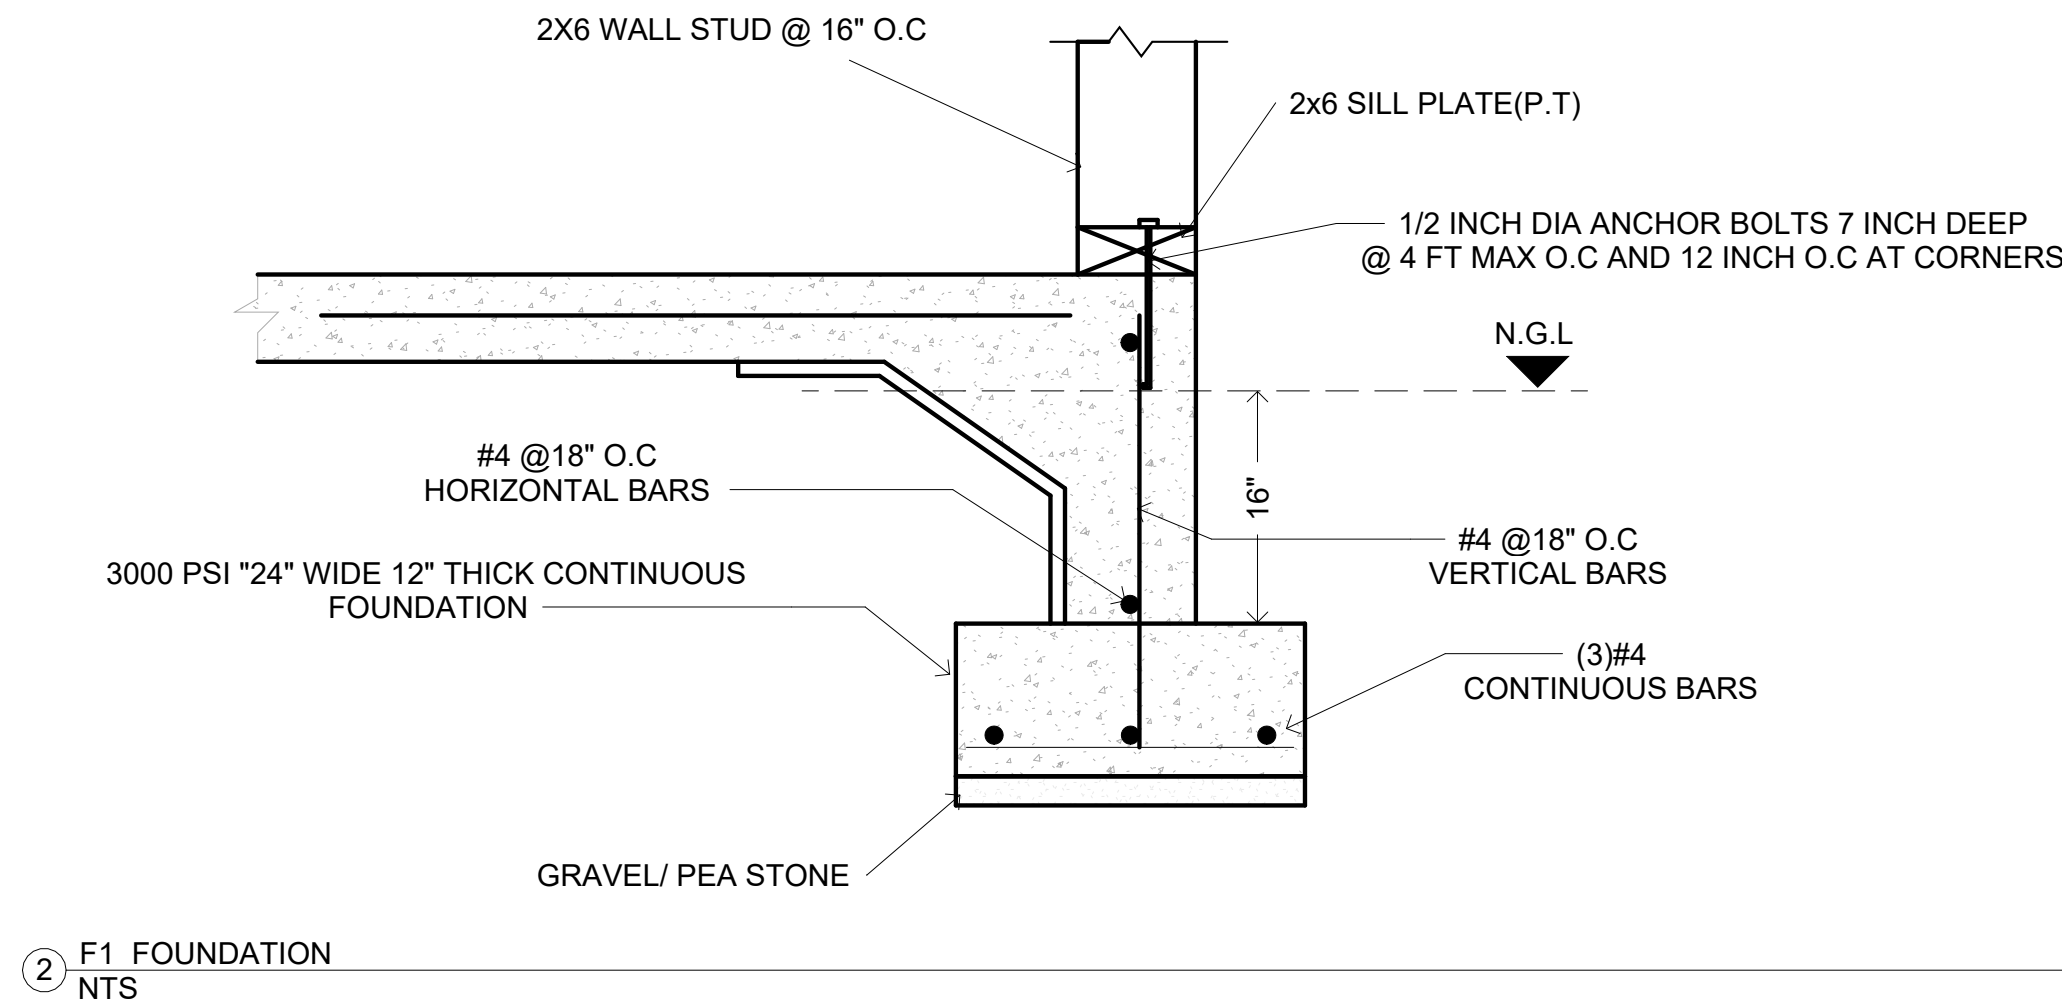

CLIENT

266 MORRO AVE

NOTES:



ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
FOUNDATION PLAN

Project number J-1497
Date 28 JAN - 2026
Drawn by ARI
Checked by AZ

S1

Scale As indicated

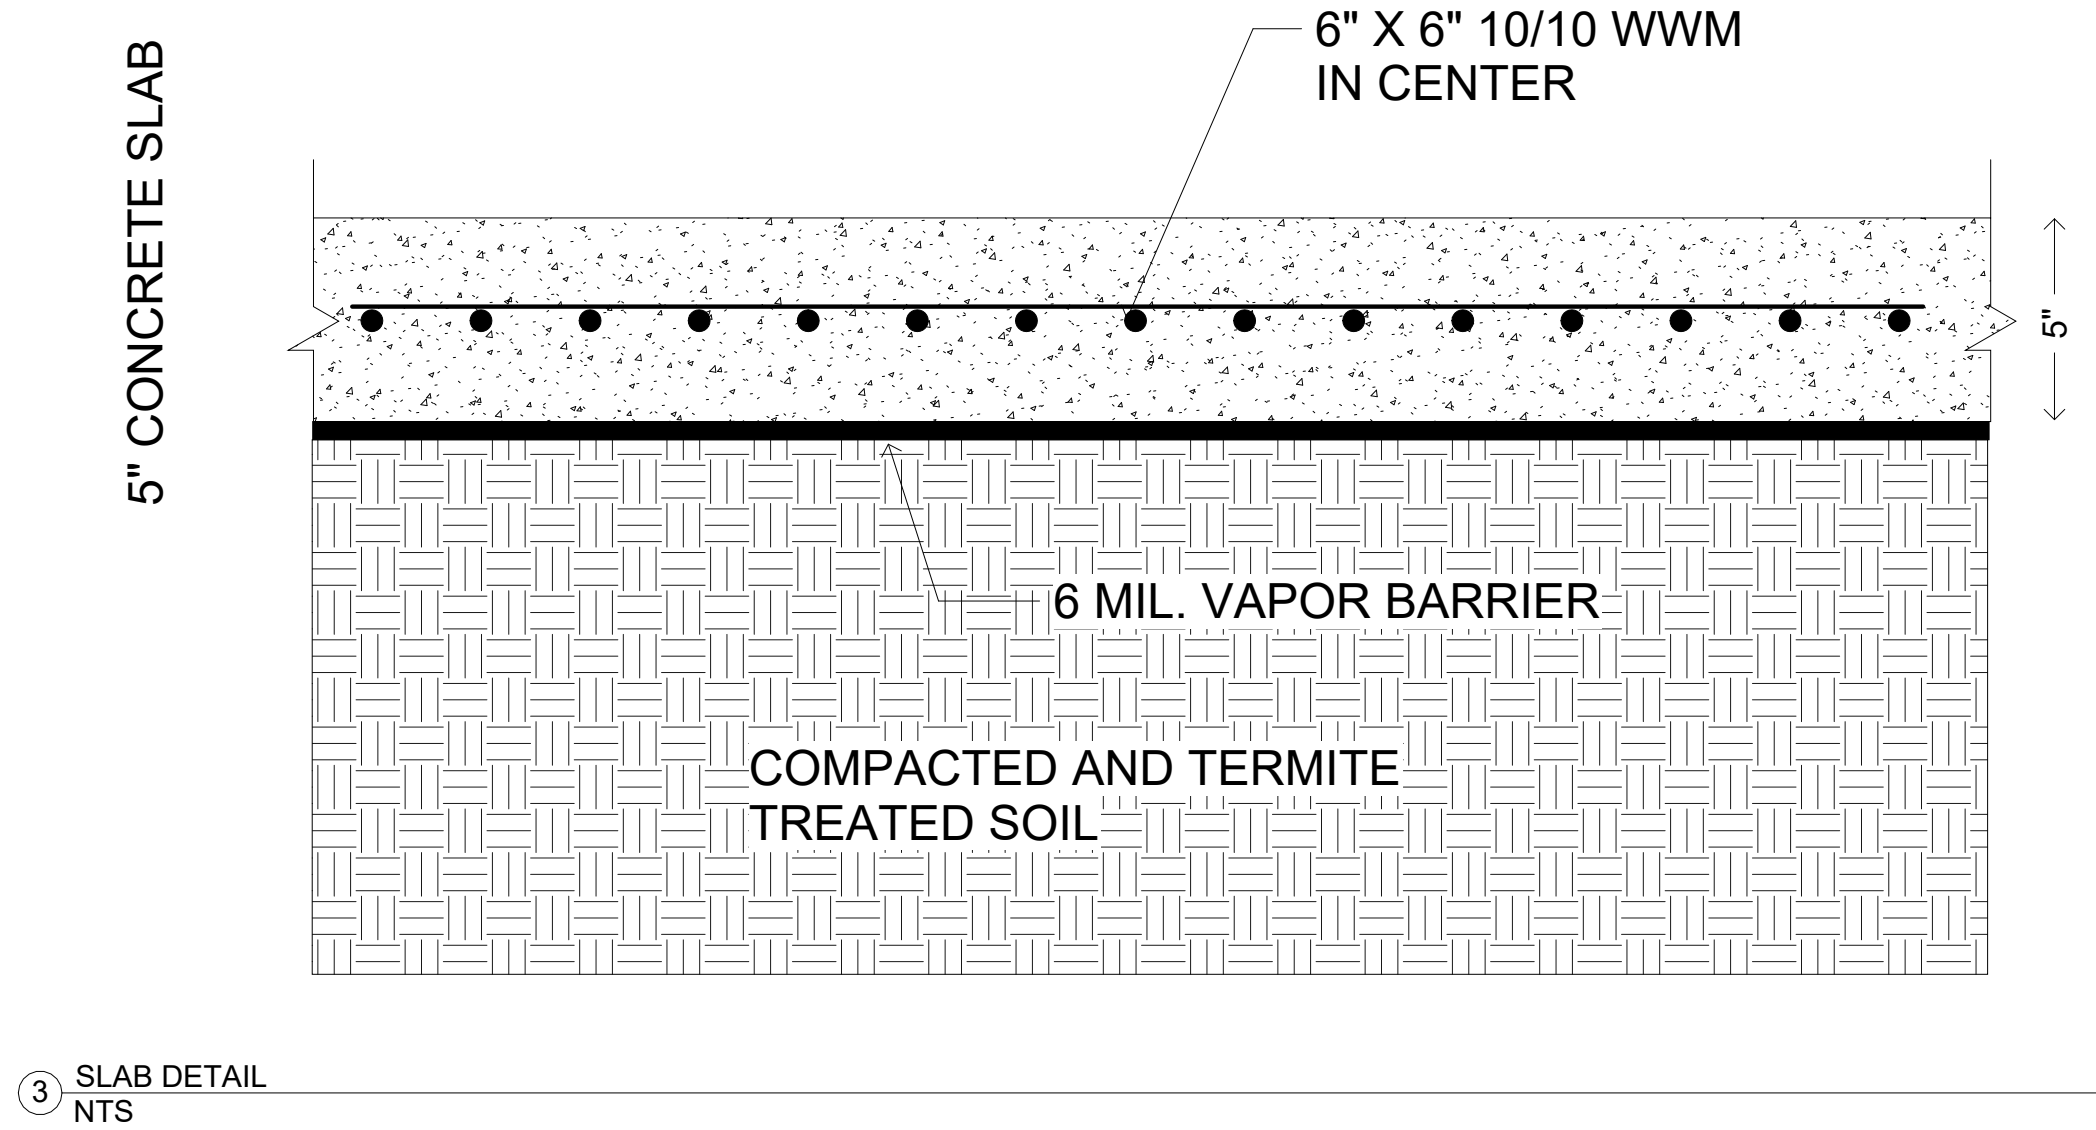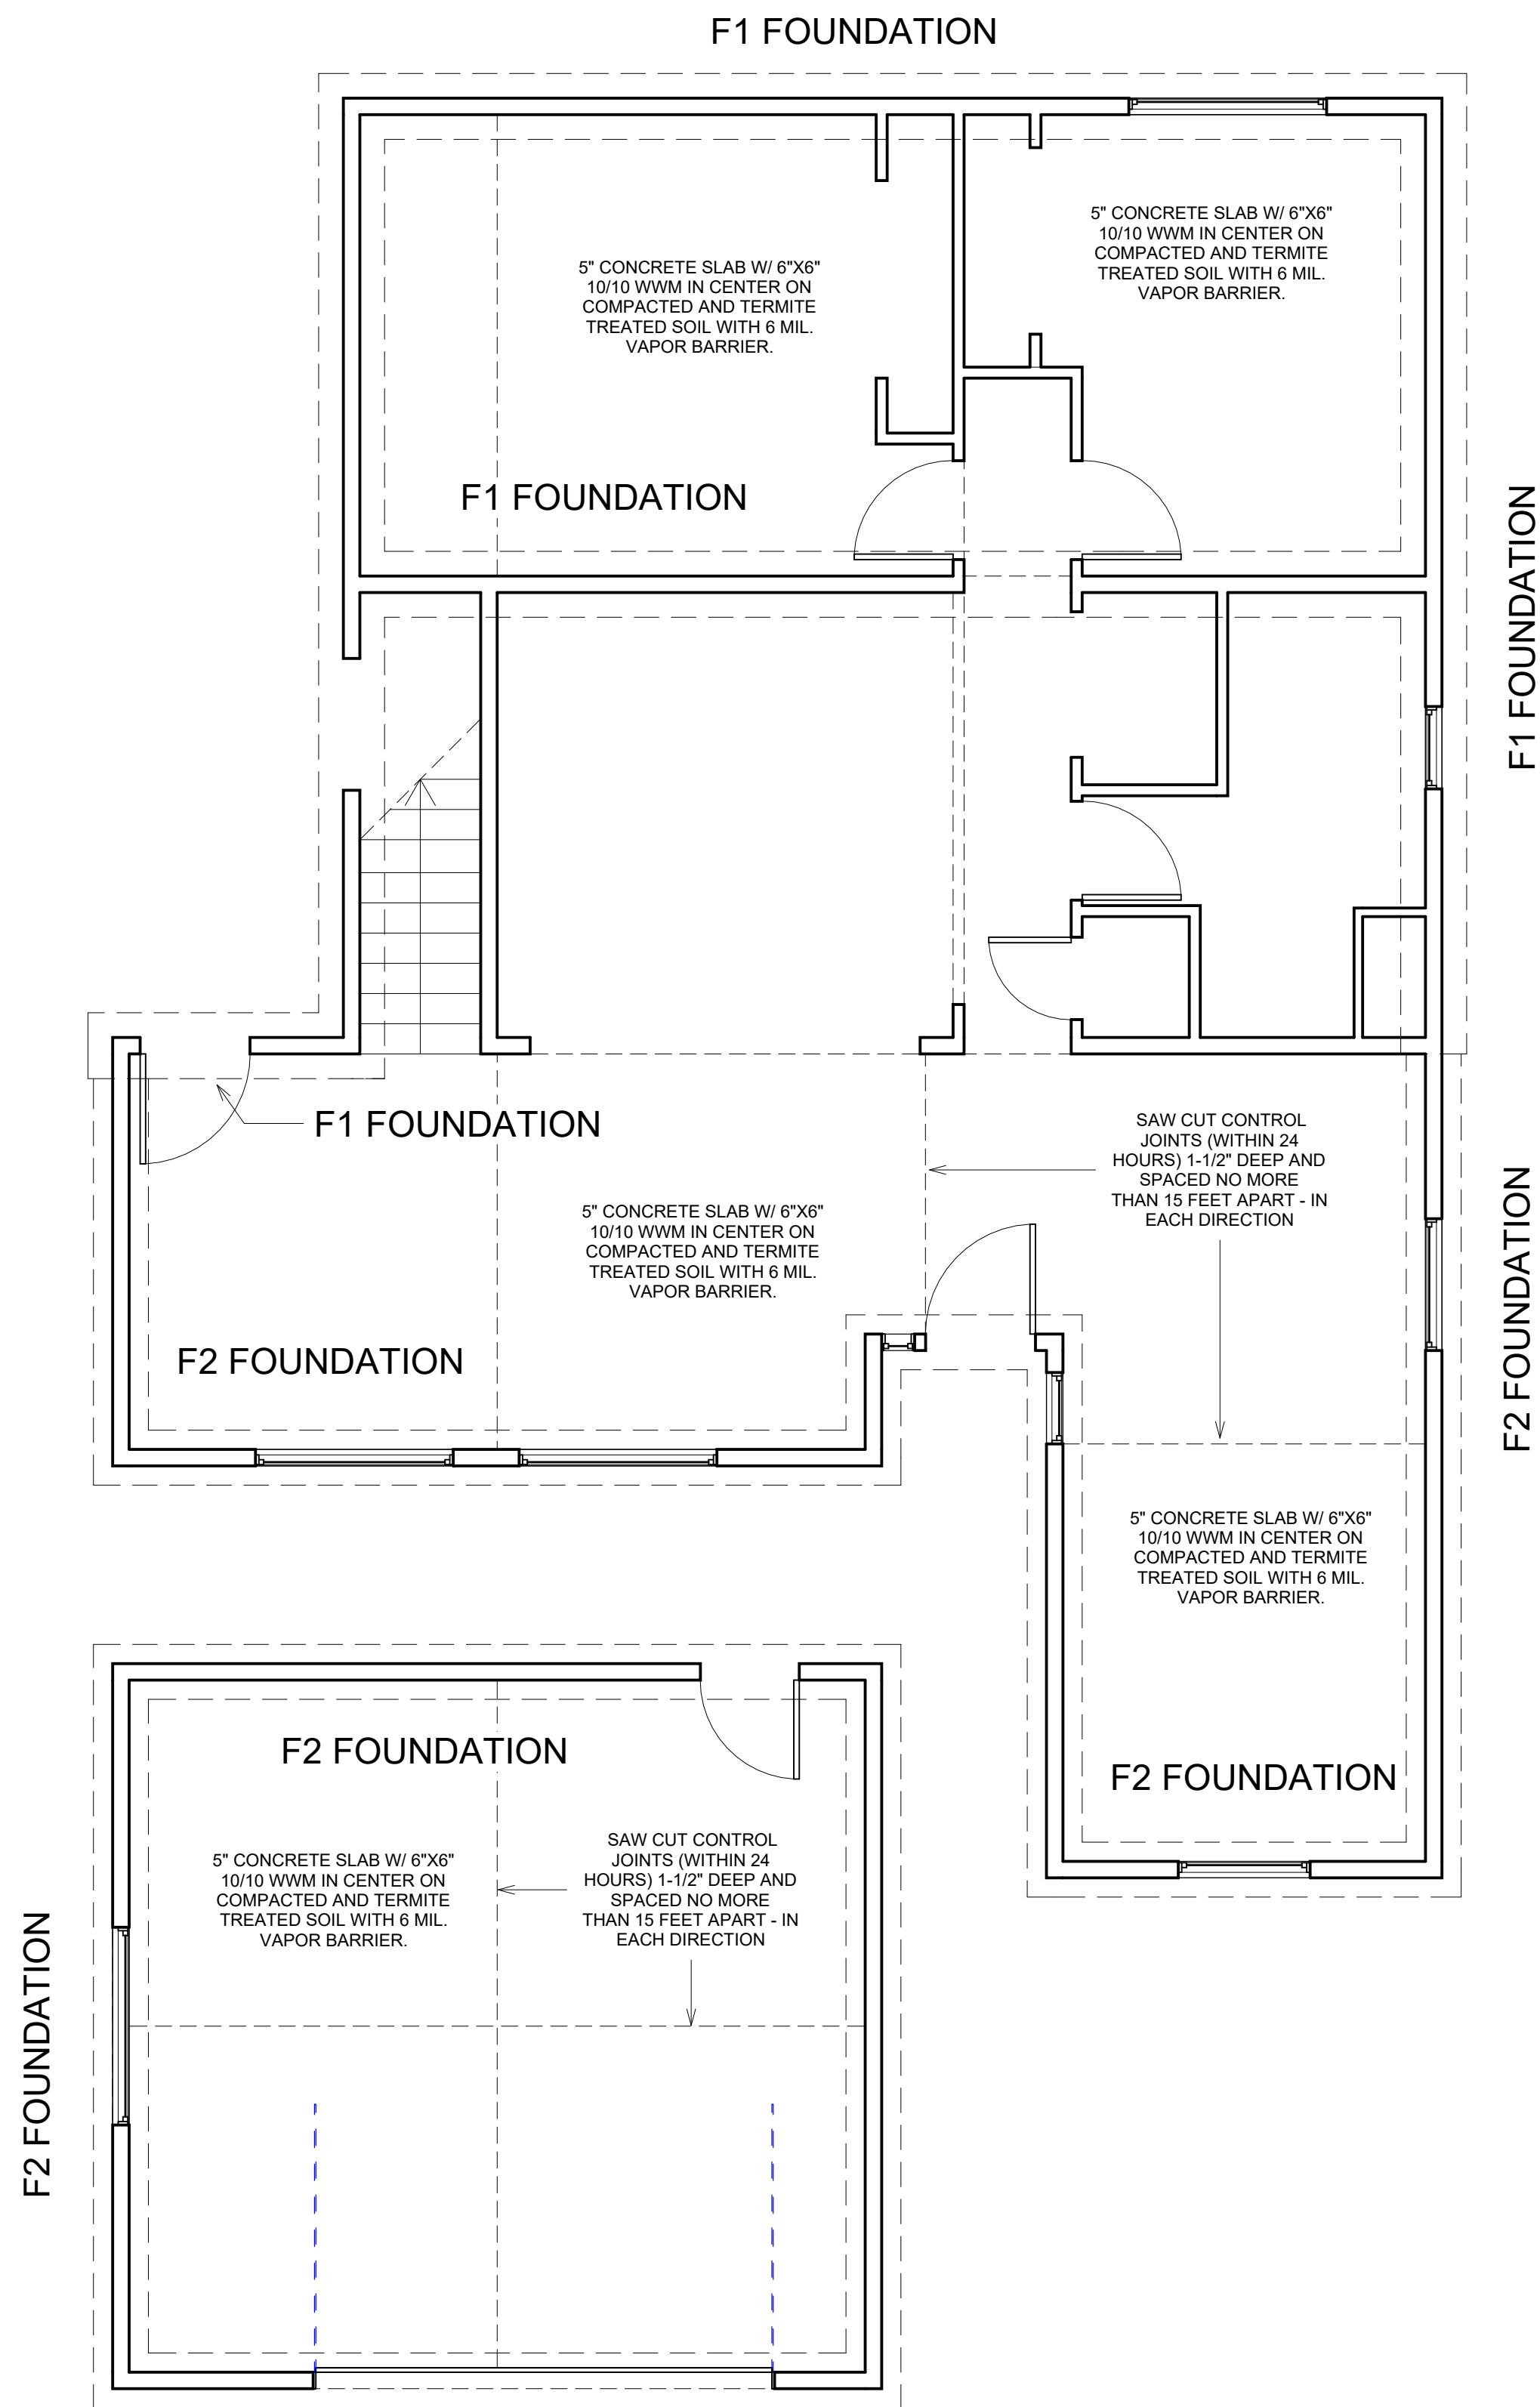

1 SLAB PLAN
1/4" = 1'-0"

CLIENT

266 MORRO AVE


NOTES:
ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
SLAB PLAN

Project number J-1497
Date 28 JAN - 2026
Drawn by ARI
Checked by AZ

S2

Scale As indicated

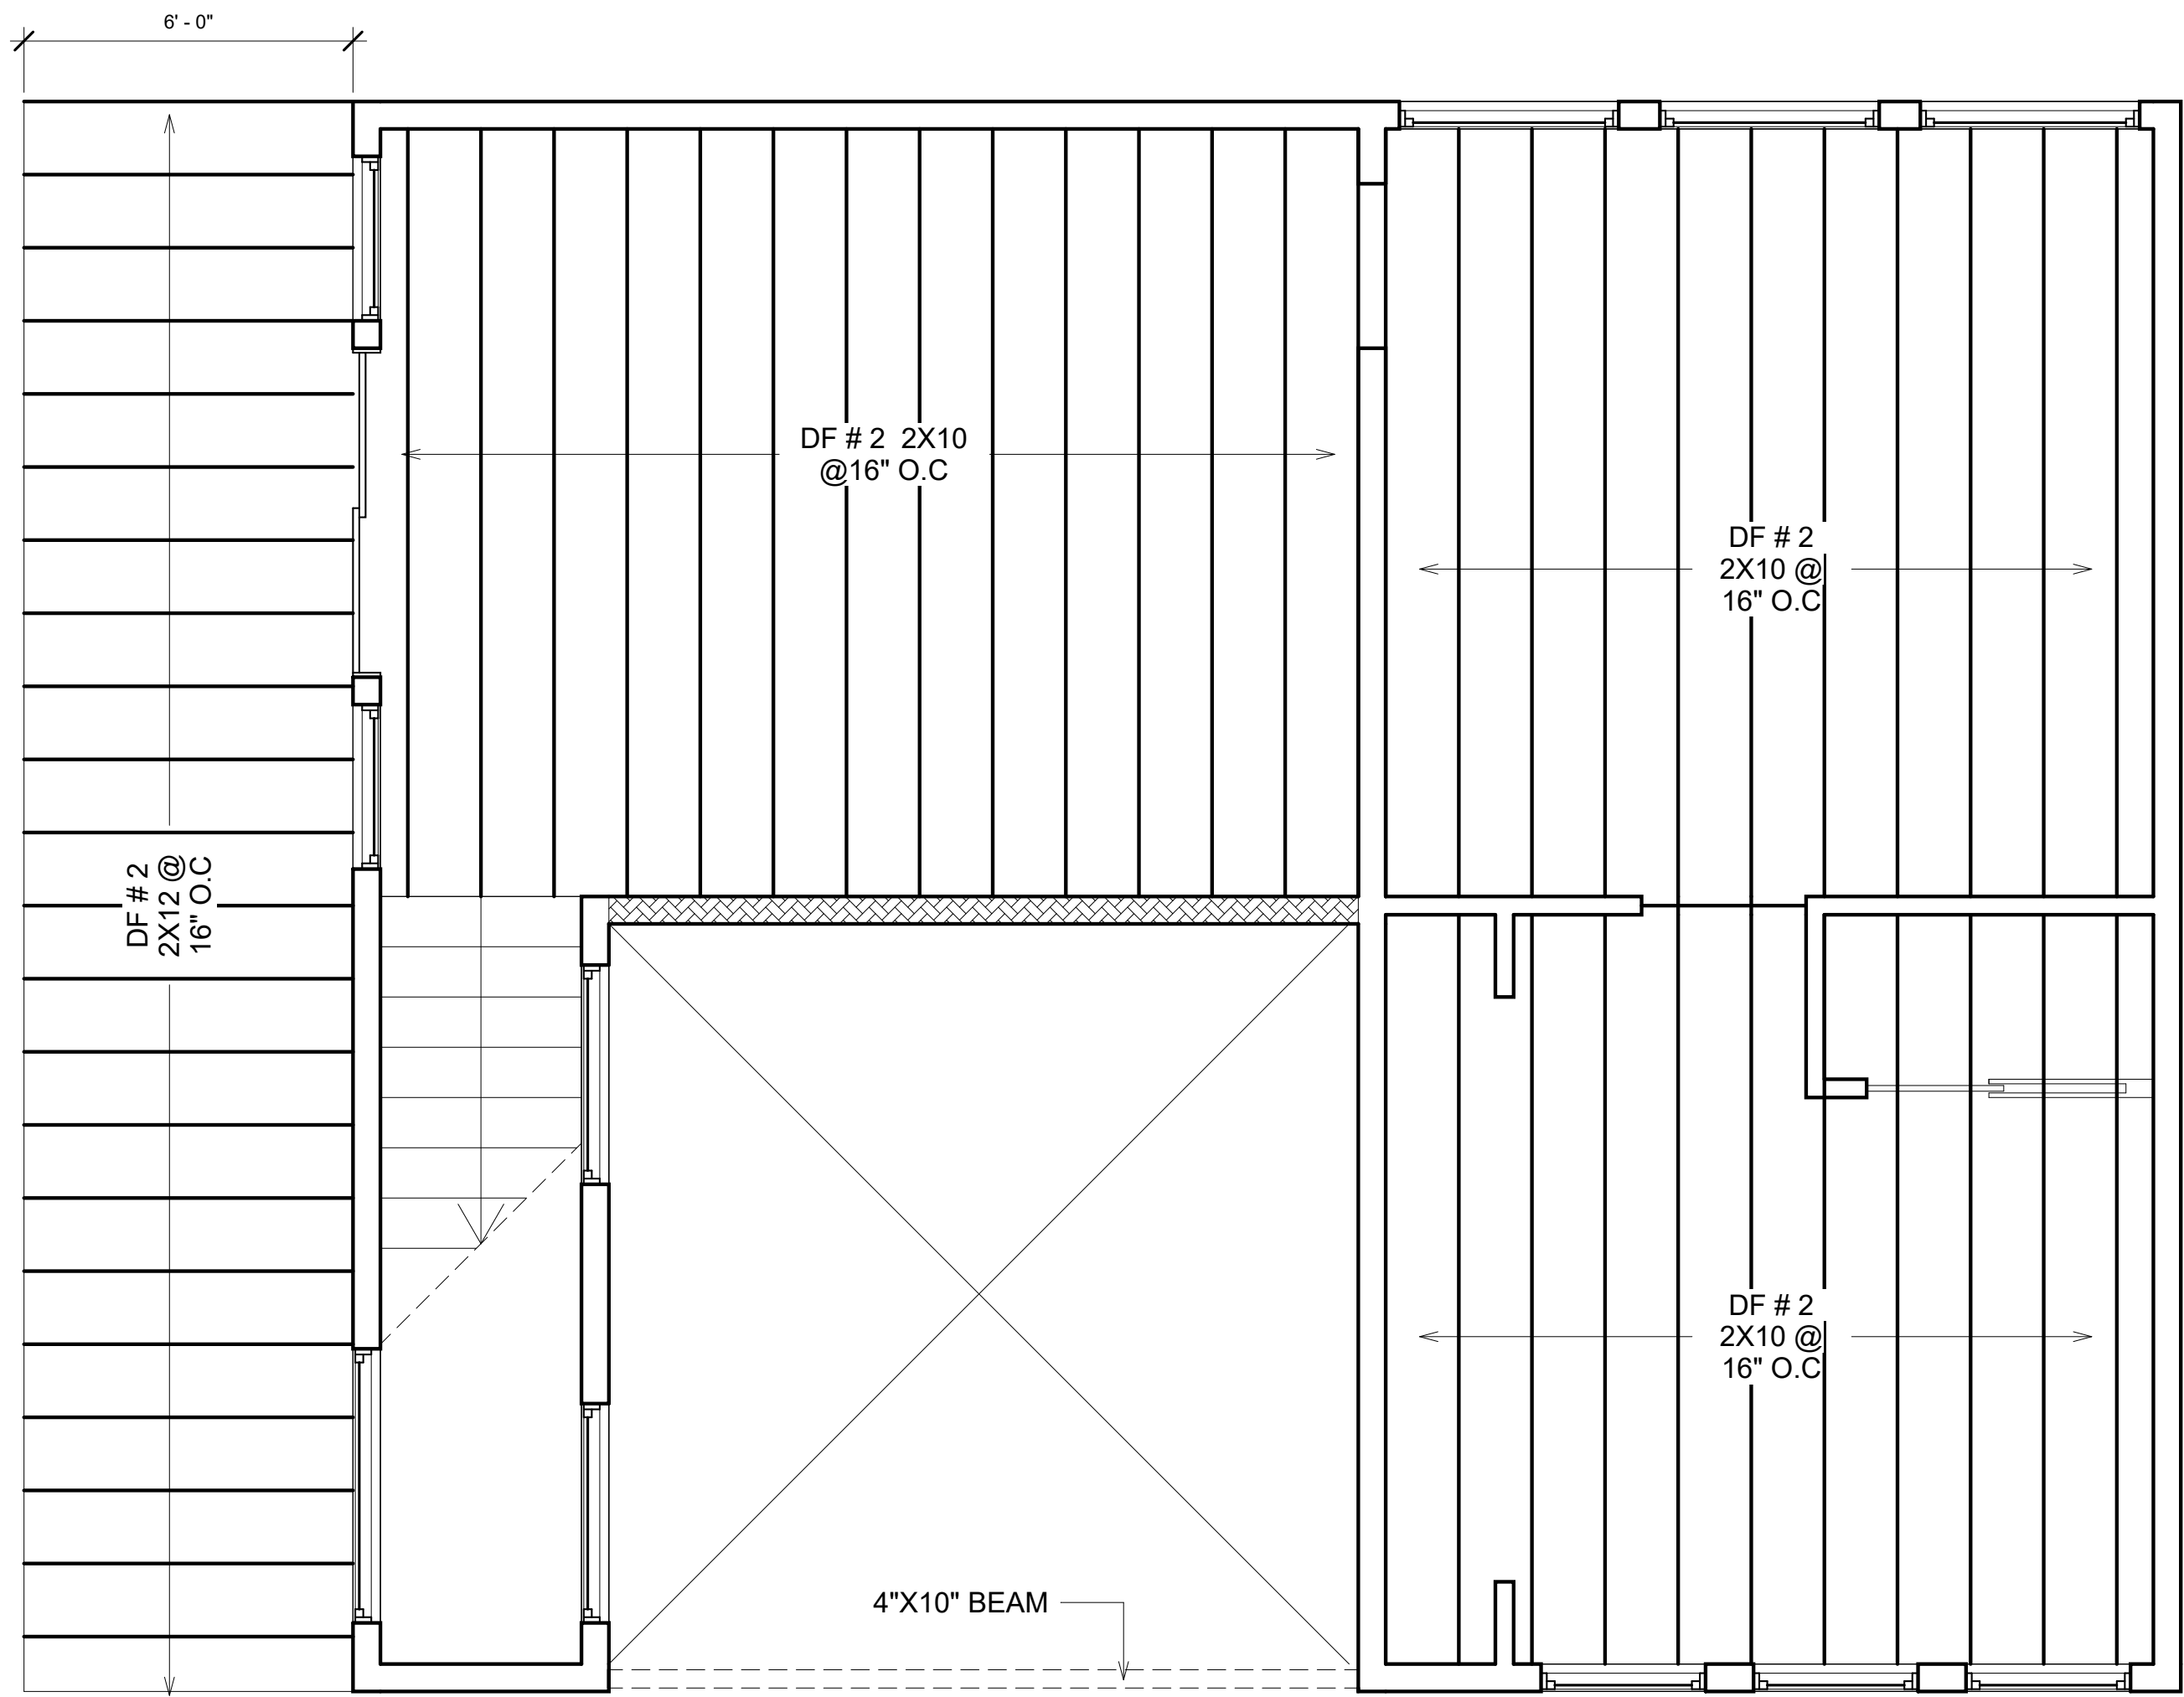

① FIRST FLOOR FRAMING
3/8" = 1'-0"

CLIENT

266 MORRO AVE

NOTES:


ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
FIRST FLOOR
FRAMING PLAN


Project number	J-1497
Date	28 JAN - 2026
Drawn by	ARI
Checked by	AZ

S3

Scale	3/8" = 1'-0"
-------	--------------

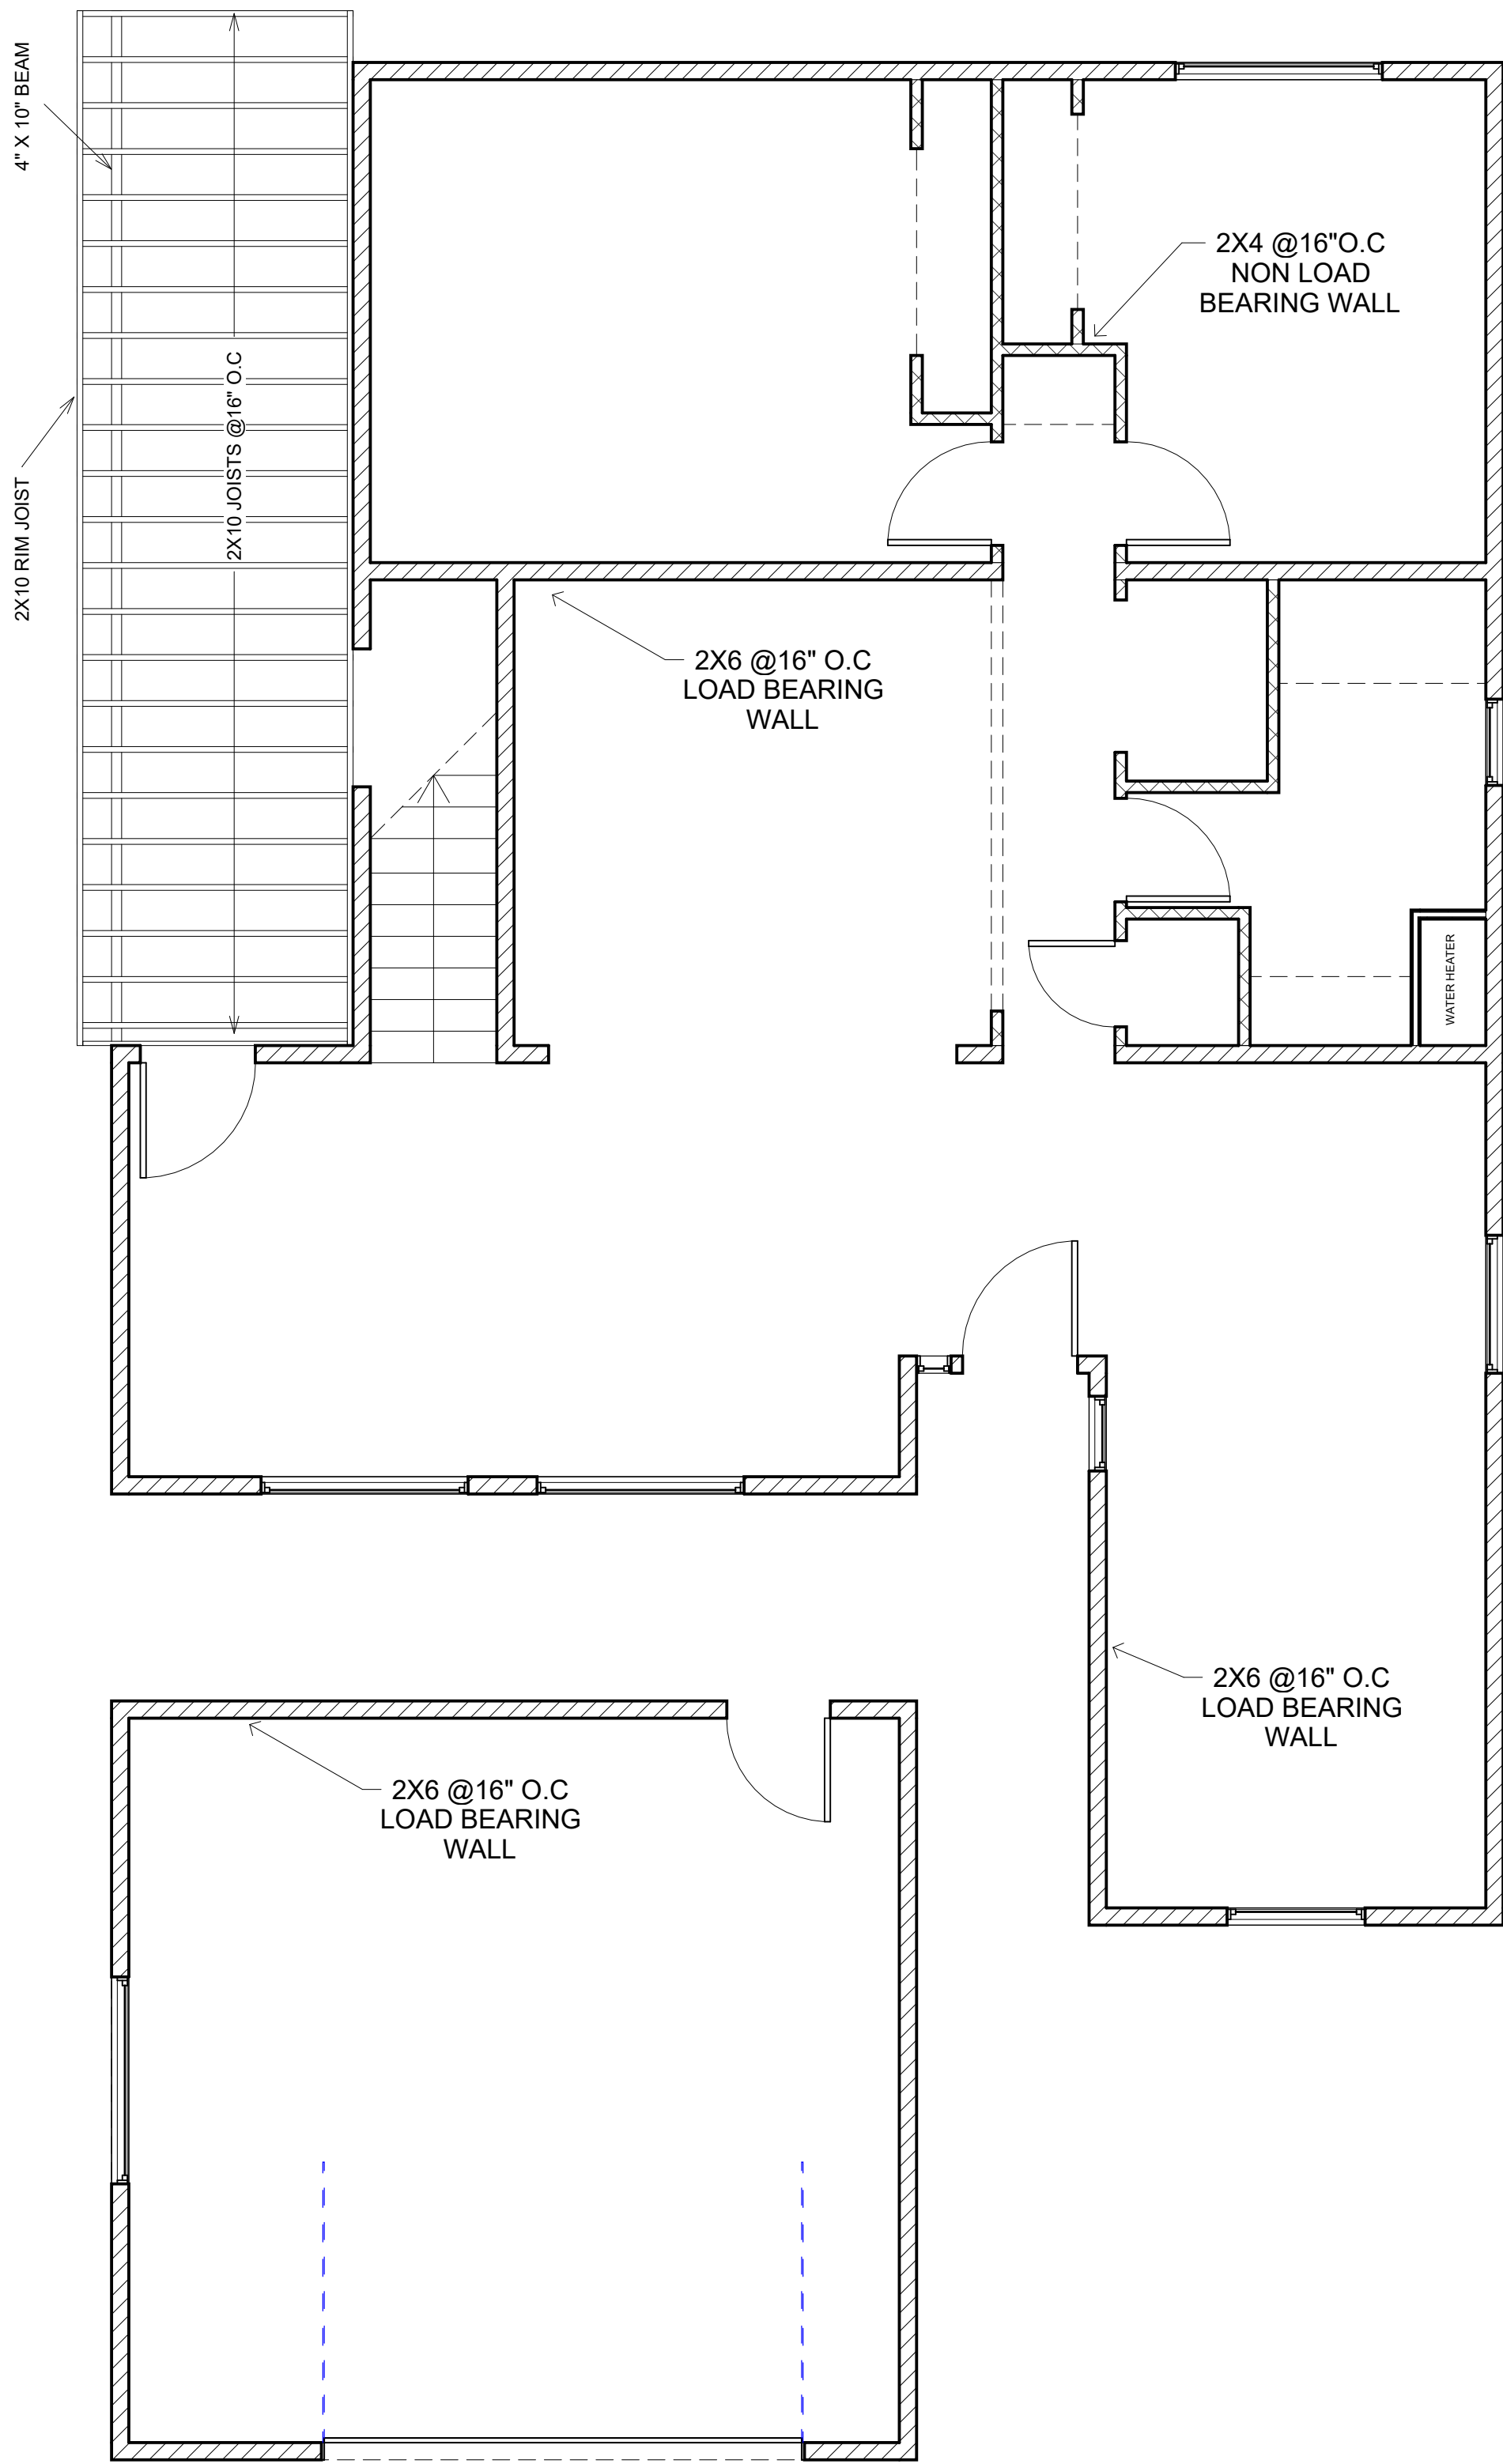

LEGEND	PROPERTY
	2X6 @16" O.C LOAD BEARING WALL
	2X4 @16"O.C NON LOAD BEARING WALL

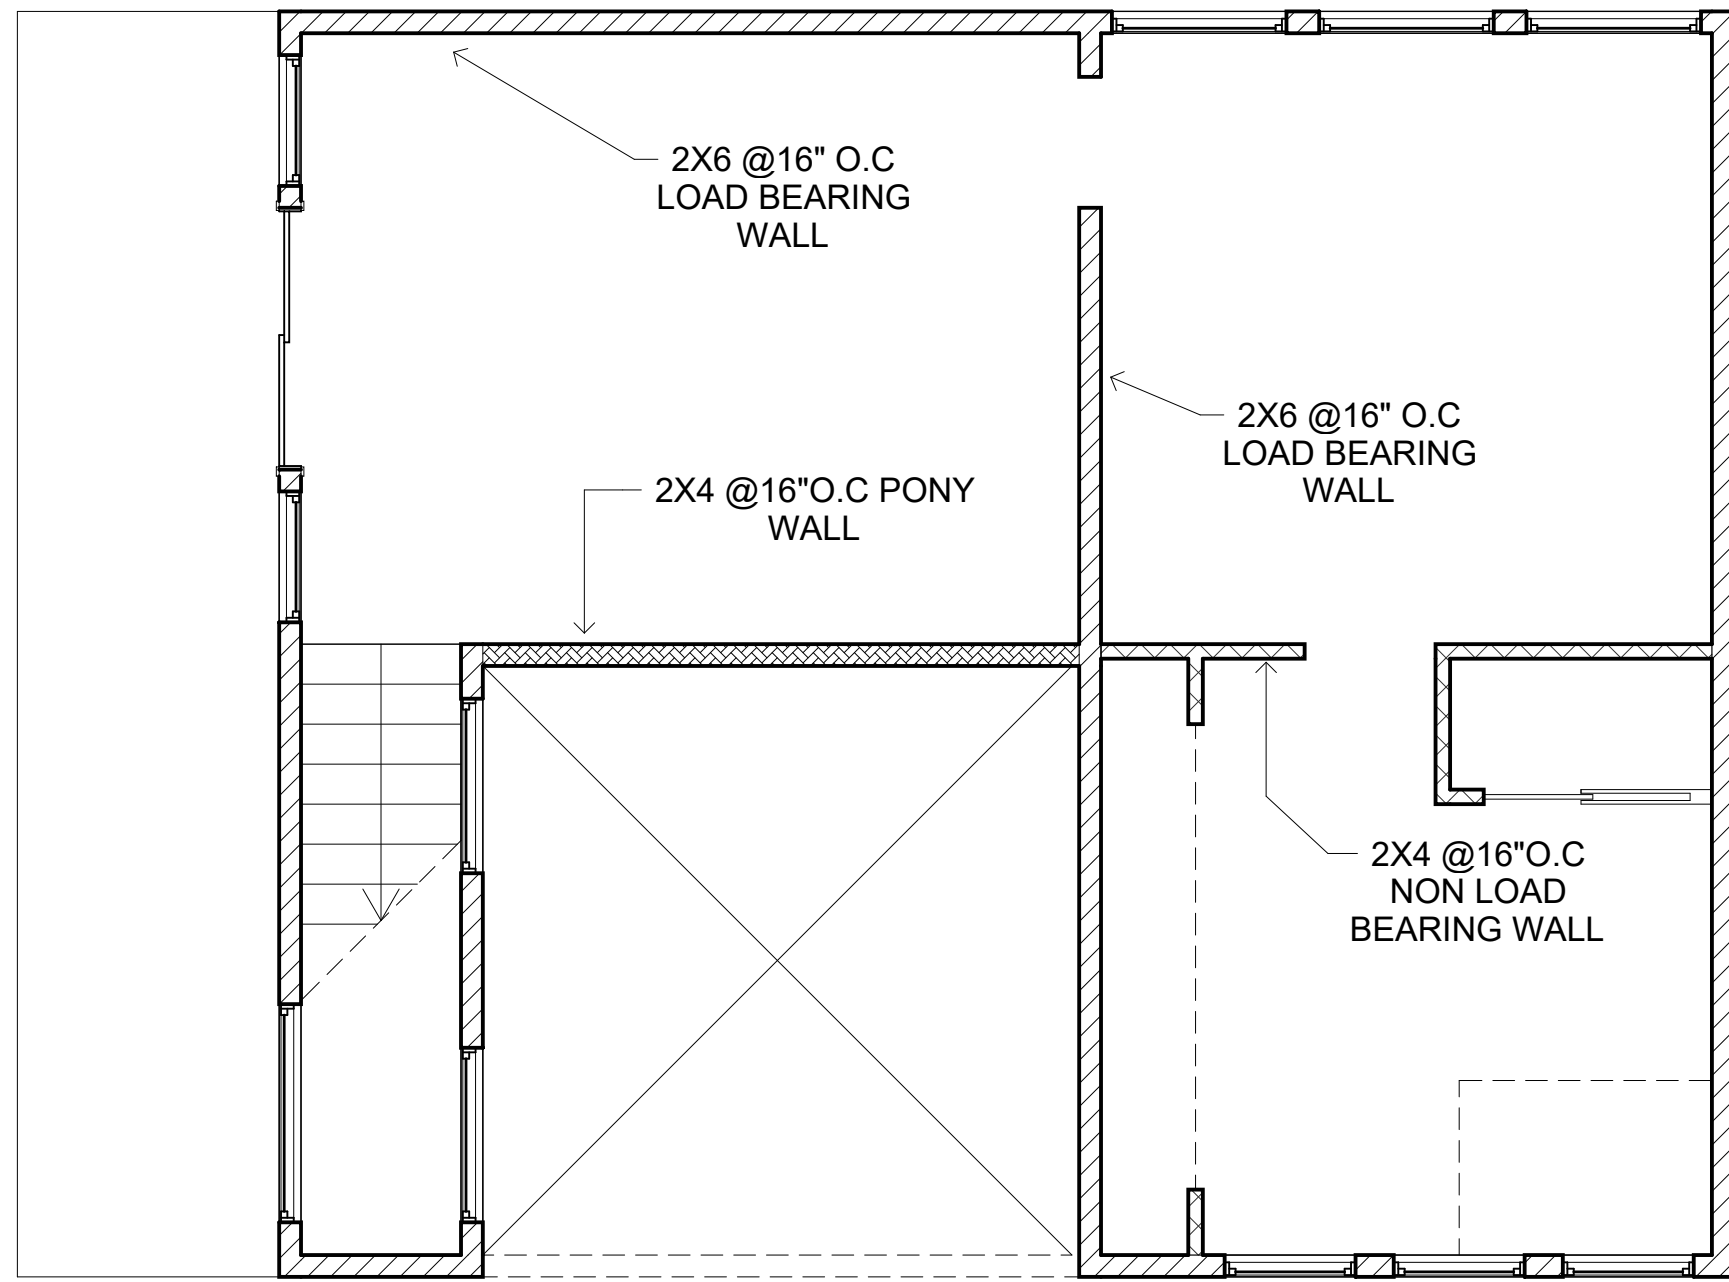

② FIRST FLOOR WALL FRAMING
1/4" = 1'-0"

① GROUND FLOOR WALL AND DECK
FRAMING
1/4" = 1'-0"

CLIENT

266 MORRO AVE

NOTES:


ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
WALL AND DECK
FRAMING PLAN

Project number J-1497
Date 28 JAN - 2026
Drawn by ARI
Checked by AZ

S4

Scale 1/4" = 1'-0"

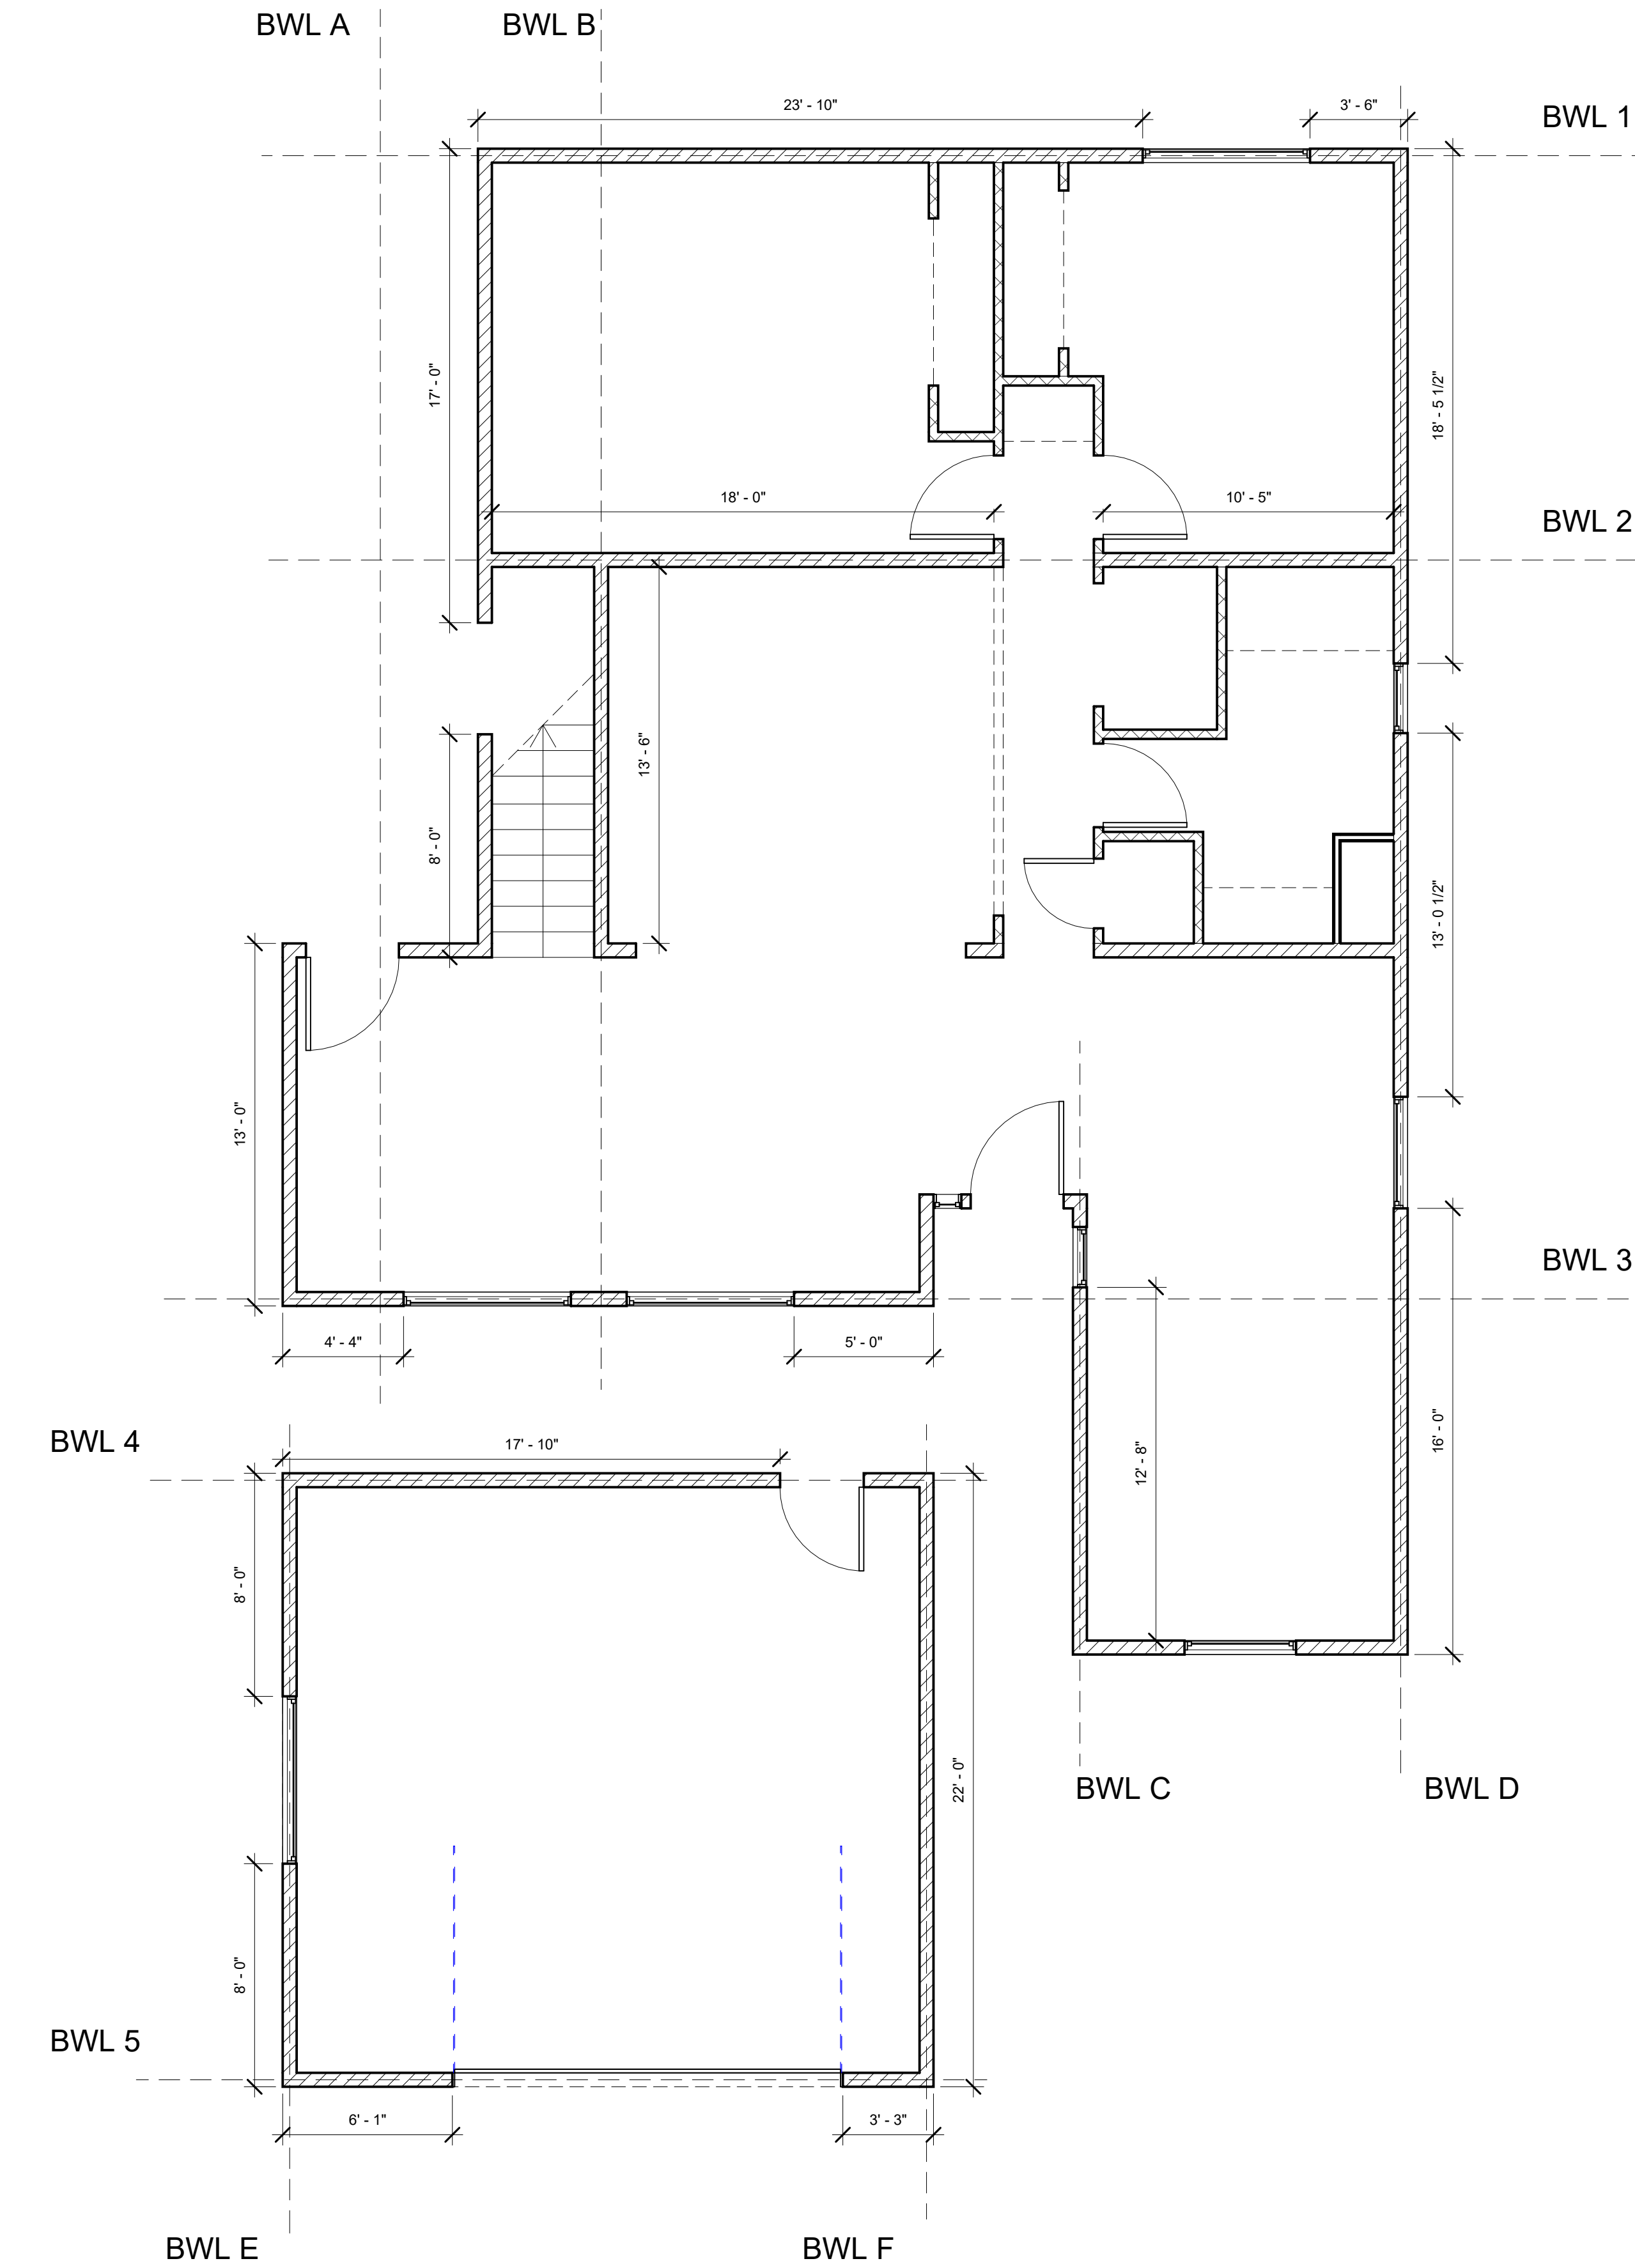

① WALL BRACING PLAN
1/4" = 1'-0"

CLIENT

266 MORRO AVE

NOTES:
ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
WALL BRACING

Project number	J-1497
Date	28 JAN - 2026
Drawn by	ARI
Checked by	AZ

S5.1

Scale	1/4" = 1'-0"
-------	--------------

SHEAR WALL SCHEDULE

WALL MARK	METHOD	WALL LENGTH	BWL SPACING	REQD BRACING	PROVIDED BRACING	PANEL THICKNESS	FASTENER SPACING		NOTE
							PANEL EDGE	FIELD	
BWL 1	CS-WSP	33' 4"	14'6"	4.5'	23'10"	3/8"	6"	12"	ALL
BWL 2	CS-WSP	30'		6'	38'5"	3/8"	6"	12"	ALL
BWL 3	CS-WSP	23'4"		6'	9'4"	3/8"	6"	12"	ALL
BWL 4	CS-WSP	23'4"	22'	4.2'	17'10"	3/8"	6"	12"	ALL
BWL 5	CS-WSP	23'4"		4.2'	6'1"	3/8"	6"	12"	ALL
BWL A	CS-WSP	38'	8'	2.9'	38'	3/8"	6"	12"	ALL
BWL B	CS-WSP	13'6"		4.8'	13'6"	3/8"	6"	12"	ALL
BWL C	CS-WSP	16'6"		4.8'	12'8"	3/8"	6"	12"	ALL
BWL D	CS-WSP	54'		4.8'	47'6"	3/8"	6"	12"	ALL
BWL E	CS-WSP	22'	23'	4.2'	16'	3/8"	6"	12"	ALL
BWL F	CS-WSP	22'		4.2'	22'	3/8"	6"	12"	ALL

SHEAR WALL NOTE:

1. HOLDOWN ANCHOR AND/OR TIEDOWN SHALL BE PLACED AT EACH END OF SHEAR WALL.
2. HOLDOWN ANCHOR BOLTS SHALL BE SET INTO SLAB AT THE TIME OF THE POUR.
3. MAXIMUM WALL STUD SPACING FOR ALL SHEAR WALLS SHALL BE NO MORE THAN 16" o.c., WITH A MIN STUD DEPTH OF 3 1/2" ALL WALLS.
4. ALL PANEL EDGES FOR ALL SHEAR WALLS SHALL BE BLOCKED; WALL SHEATHTHING MAY BE PLACED ON EITHER SIDE OF THE WALL.
5. HOLDOWN ANCHOR AND TIEDOWN REFER TO MANUFACTURERS INSTALLATION GUIDE FOR INFORMATION NOT SHOWN.
6. EQUAL SIZE STRAPS TO BE LOCATED EACH END OF WALL (U.N.O.)
7. ATTACH FOUNDATION SILL W/ 1/2" DIAMETER ANCHOR BOLT @ 4'-0" O.C. (SHAPE "L" OR "J") 7" MINIMUM EMBEDMENT.
8. THE SHEAR WALL MINIMUM VERTICAL STUD GRADE IS DOUGLAS FIR-LARCH (D.F.L.) NO.2

CLIENT

266 MORRO AVE

NOTES:


ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
WALL BRACING
TABLE

Project number J-1497
Date 28 JAN - 2026
Drawn by ARI
Checked by AZ

S5.2

Scale 1/2" = 1'-0"

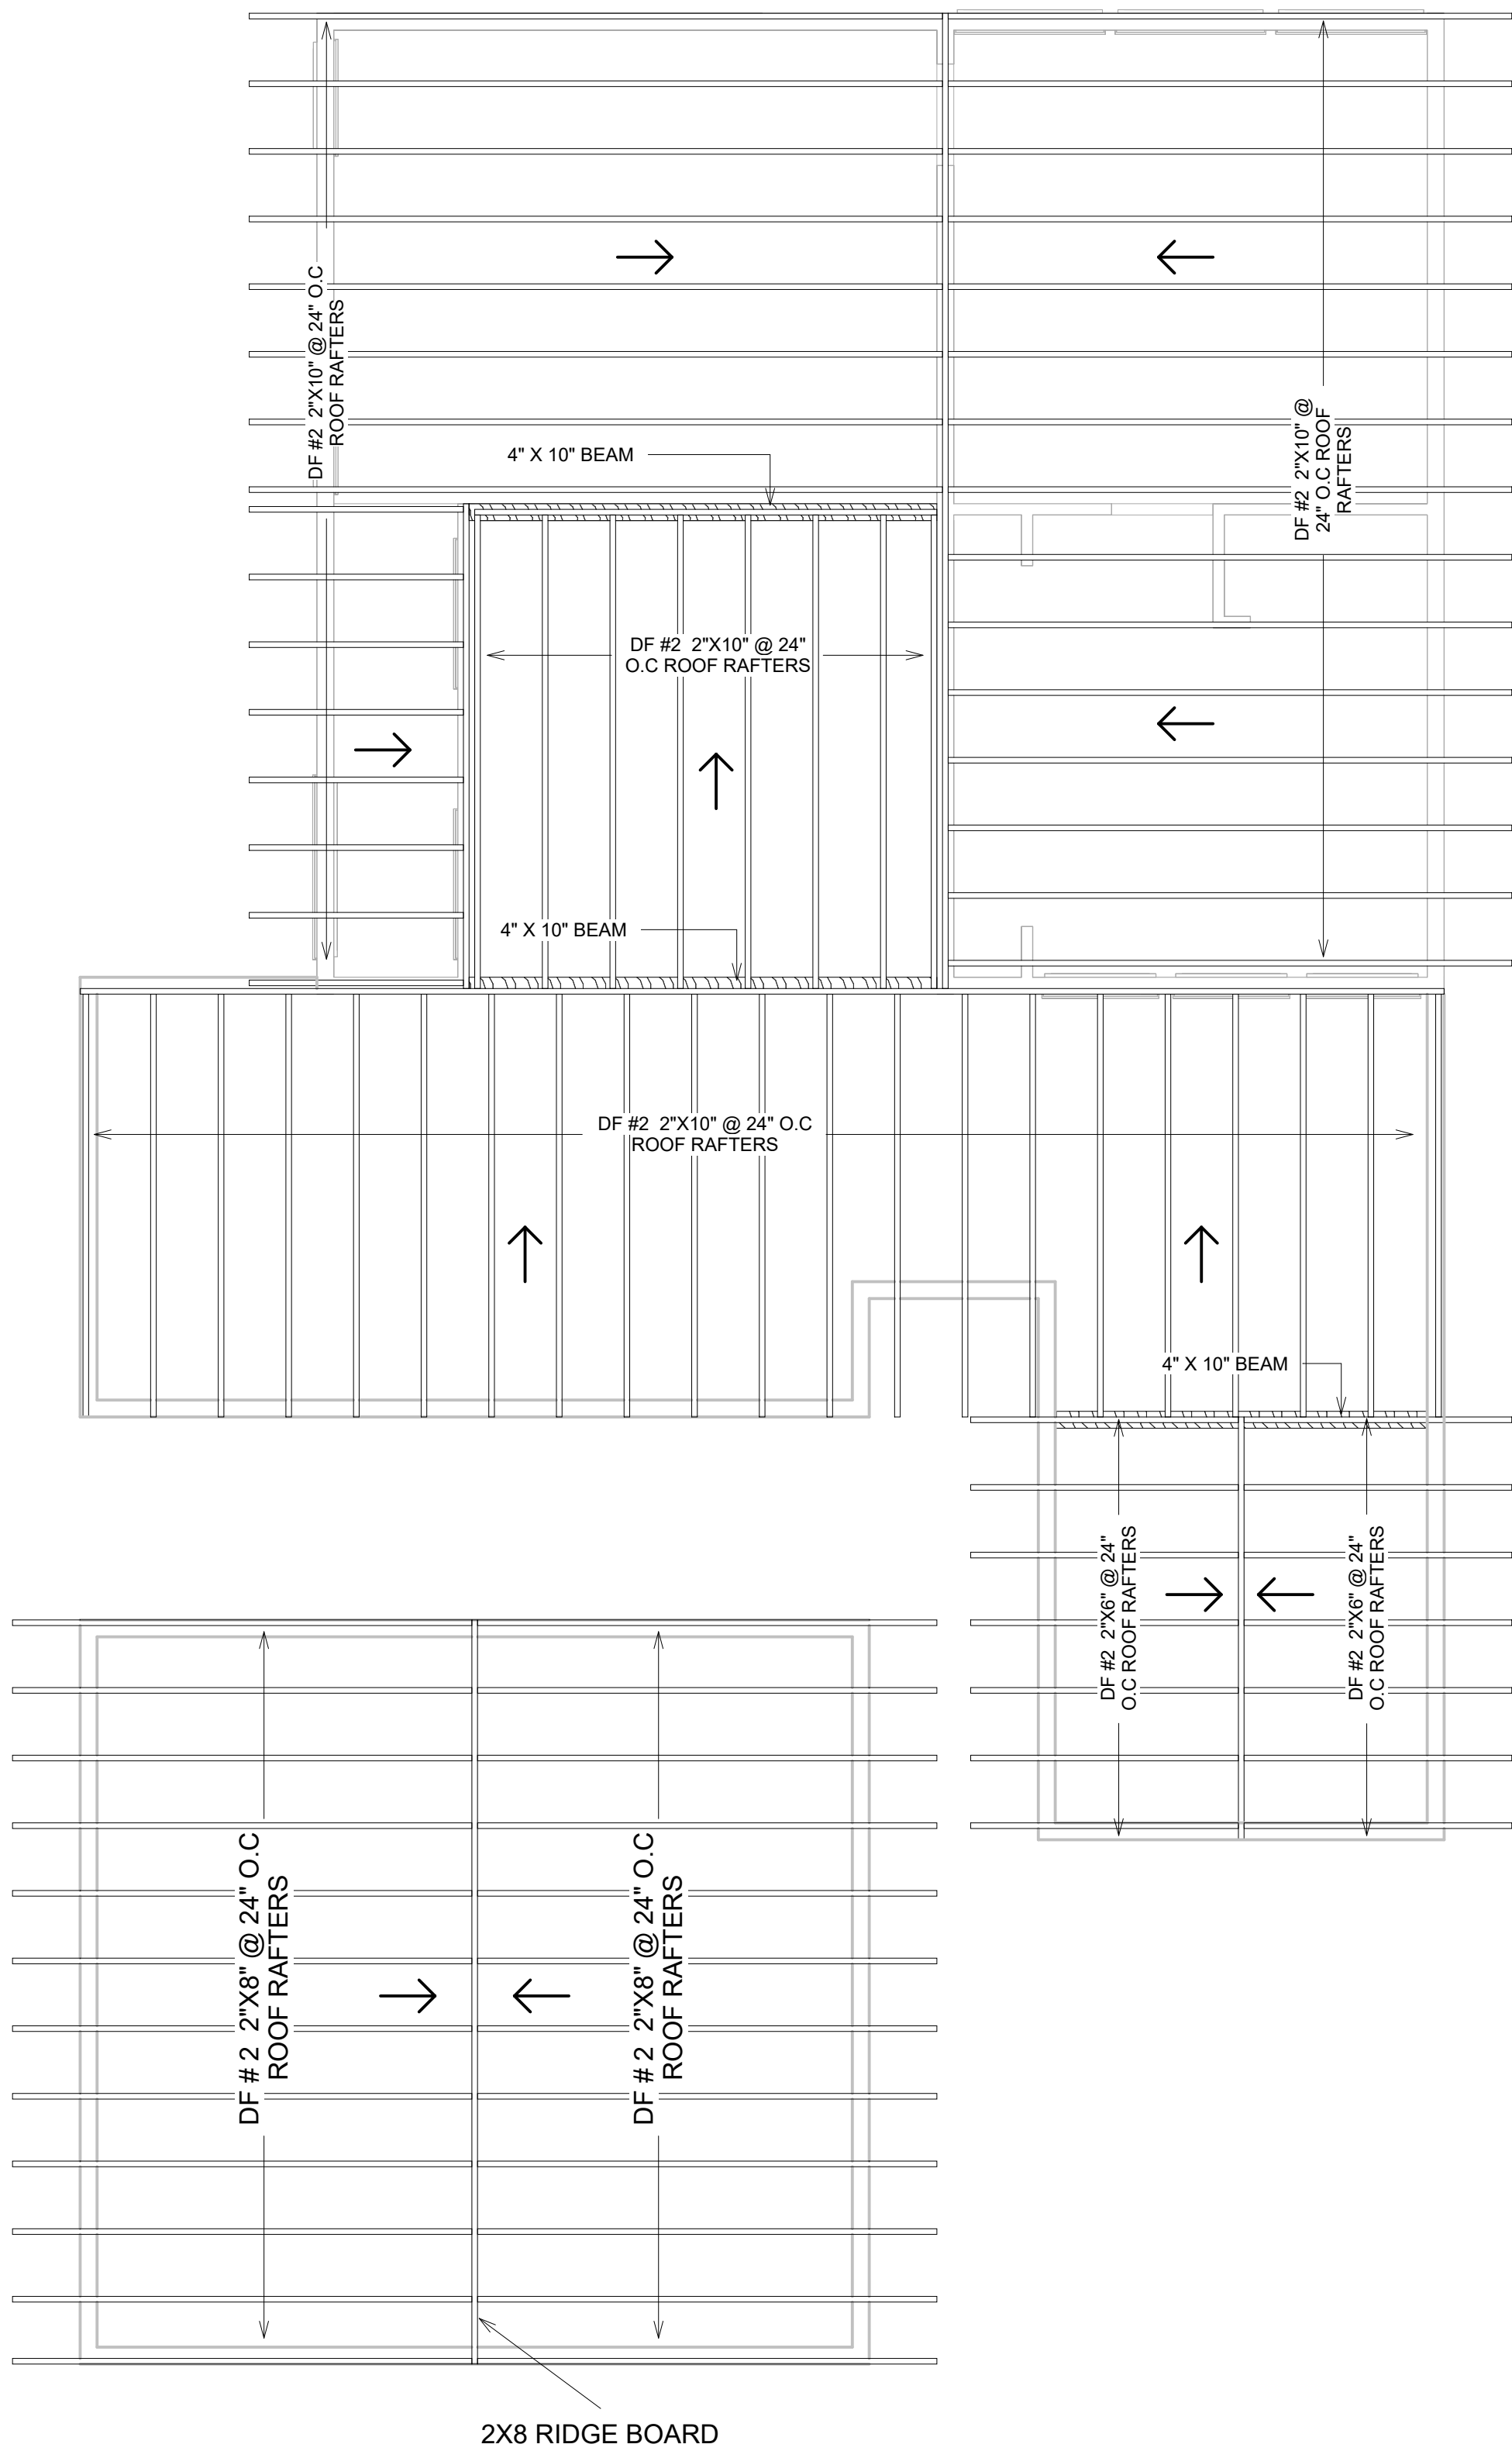

① ROOF PLAN
1/4" = 1'-0"

CLIENT

266 MORRO AVE

NOTES:

ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
ROOF FRAMING


Project number J-1497
Date 28 JAN - 2026
Drawn by ARI
Checked by AZ

S6

Scale 1/4" = 1'-0"

WALL PLATE CONNECTIONS:

- NAIL THE BOTTOM PLATE TO THE FLOOR JOISTS USING 16D NAILS, ONE AT EACH JOIST CROSSING.
- FOR CONCRETE FLOORS, USE MASONRY NAILS OR CONCRETE SCREWS.
- ATTACH THE TOP PLATE TO CEILING JOISTS OR BLOCKING USING 16D NAILS.
- SECURE THE END STUDS TO ADJACENT WALLS, NAILING EVERY 16 INCHES INTO STUDS OR BLOCKING.

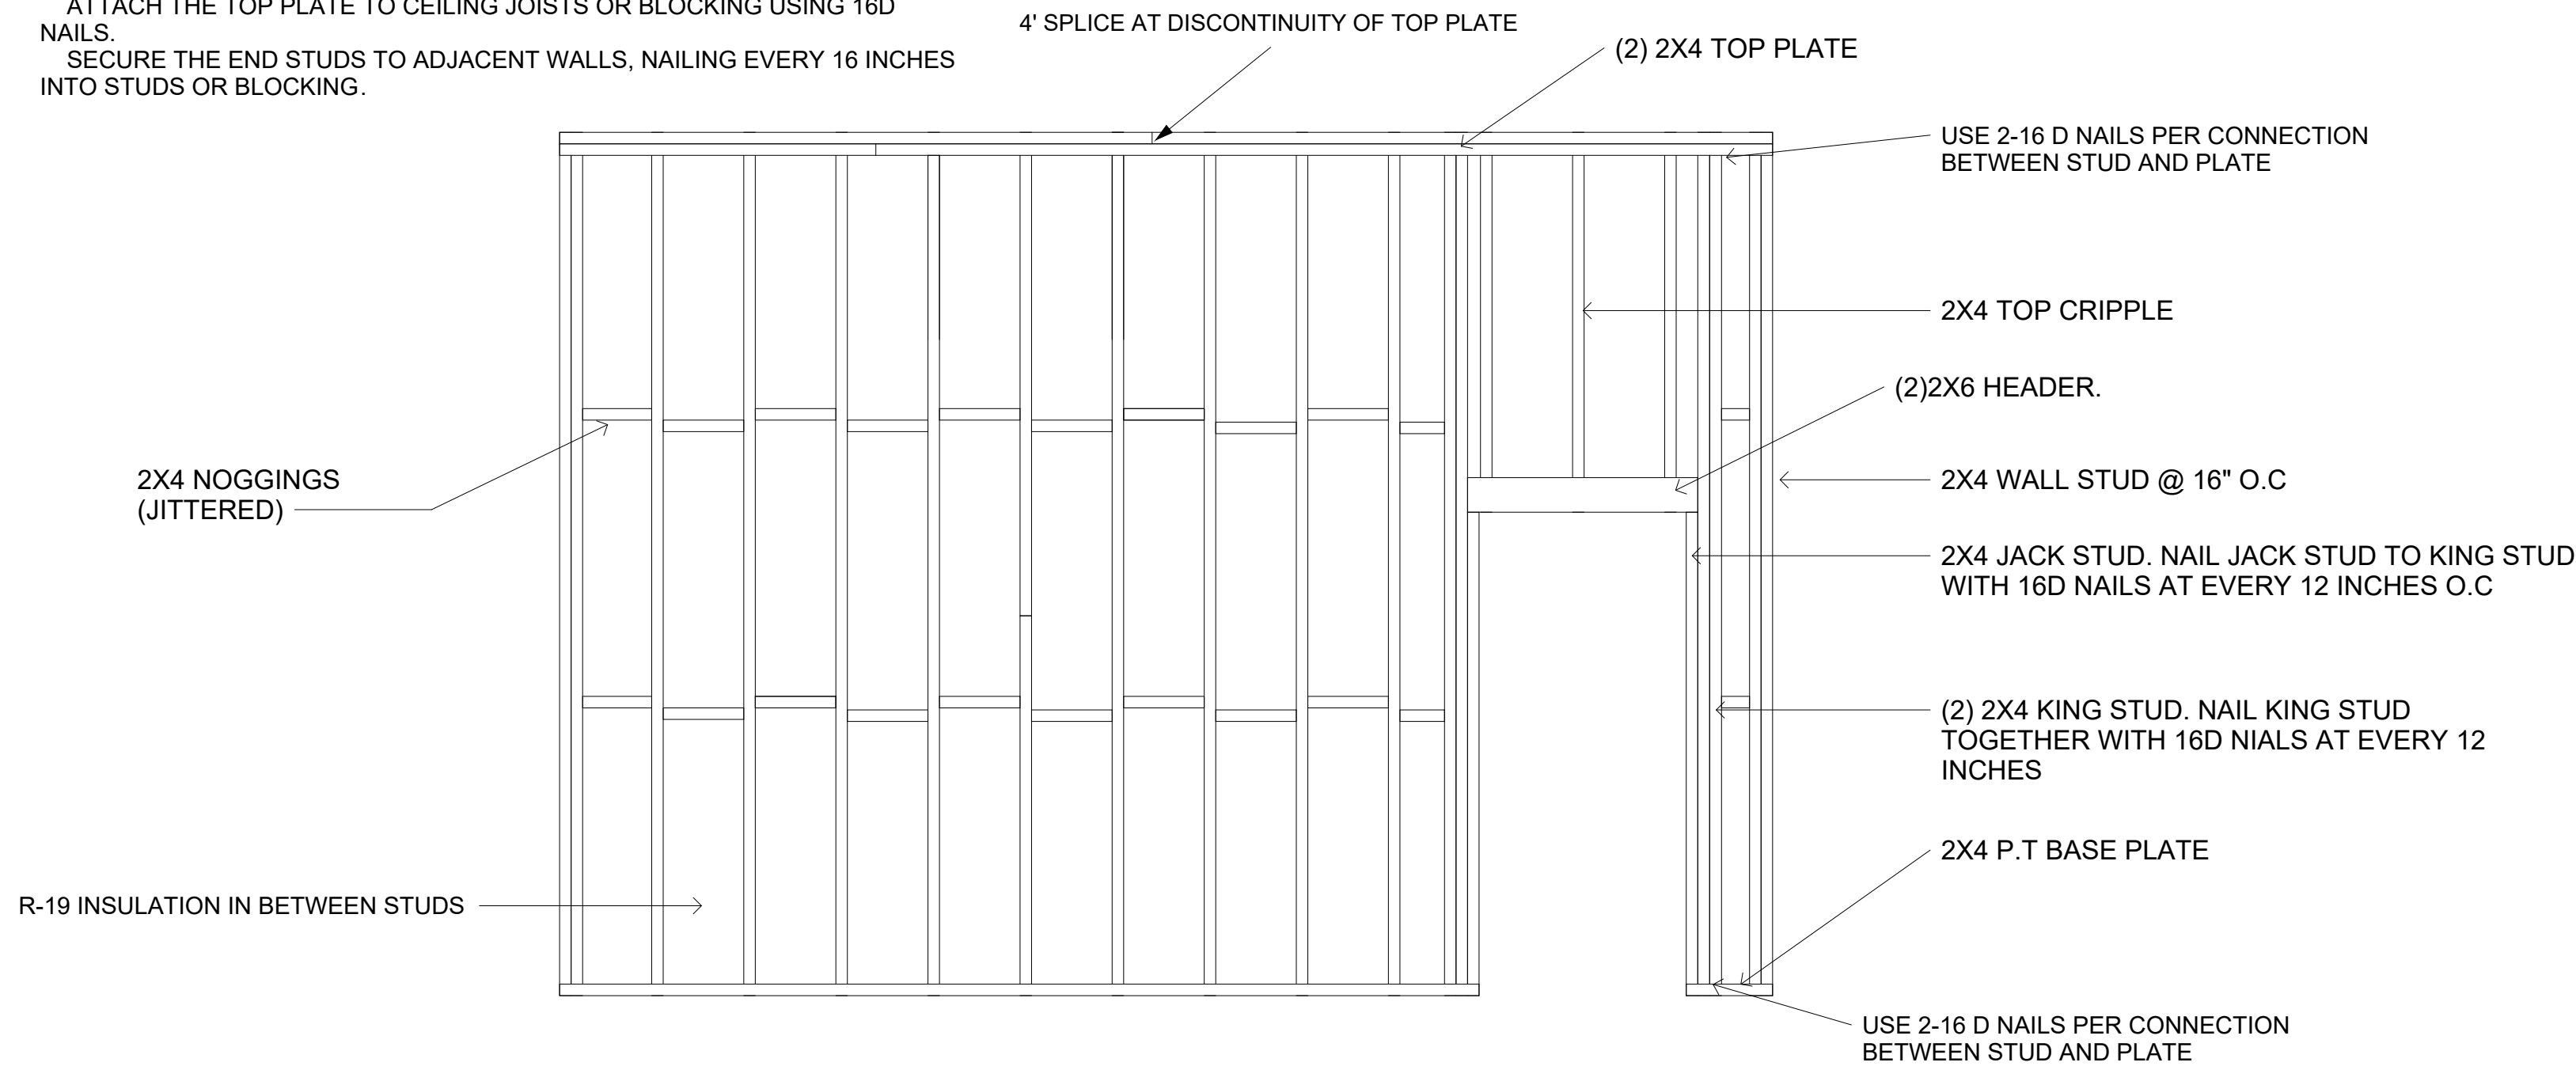


4 INCH STUD WALL DETAILS

1/2" = 1'-0"


WALL PLATE CONNECTIONS:

- NAIL THE BOTTOM PLATE TO THE FLOOR JOISTS USING 16D NAILS, ONE AT EACH JOIST CROSSING.
- FOR CONCRETE FLOORS, USE MASONRY NAILS OR CONCRETE SCREWS.
- ATTACH THE TOP PLATE TO CEILING JOISTS OR BLOCKING USING 16D NAILS.
- SECURE THE END STUDS TO ADJACENT WALLS, NAILING EVERY 16 INCHES INTO STUDS OR BLOCKING .

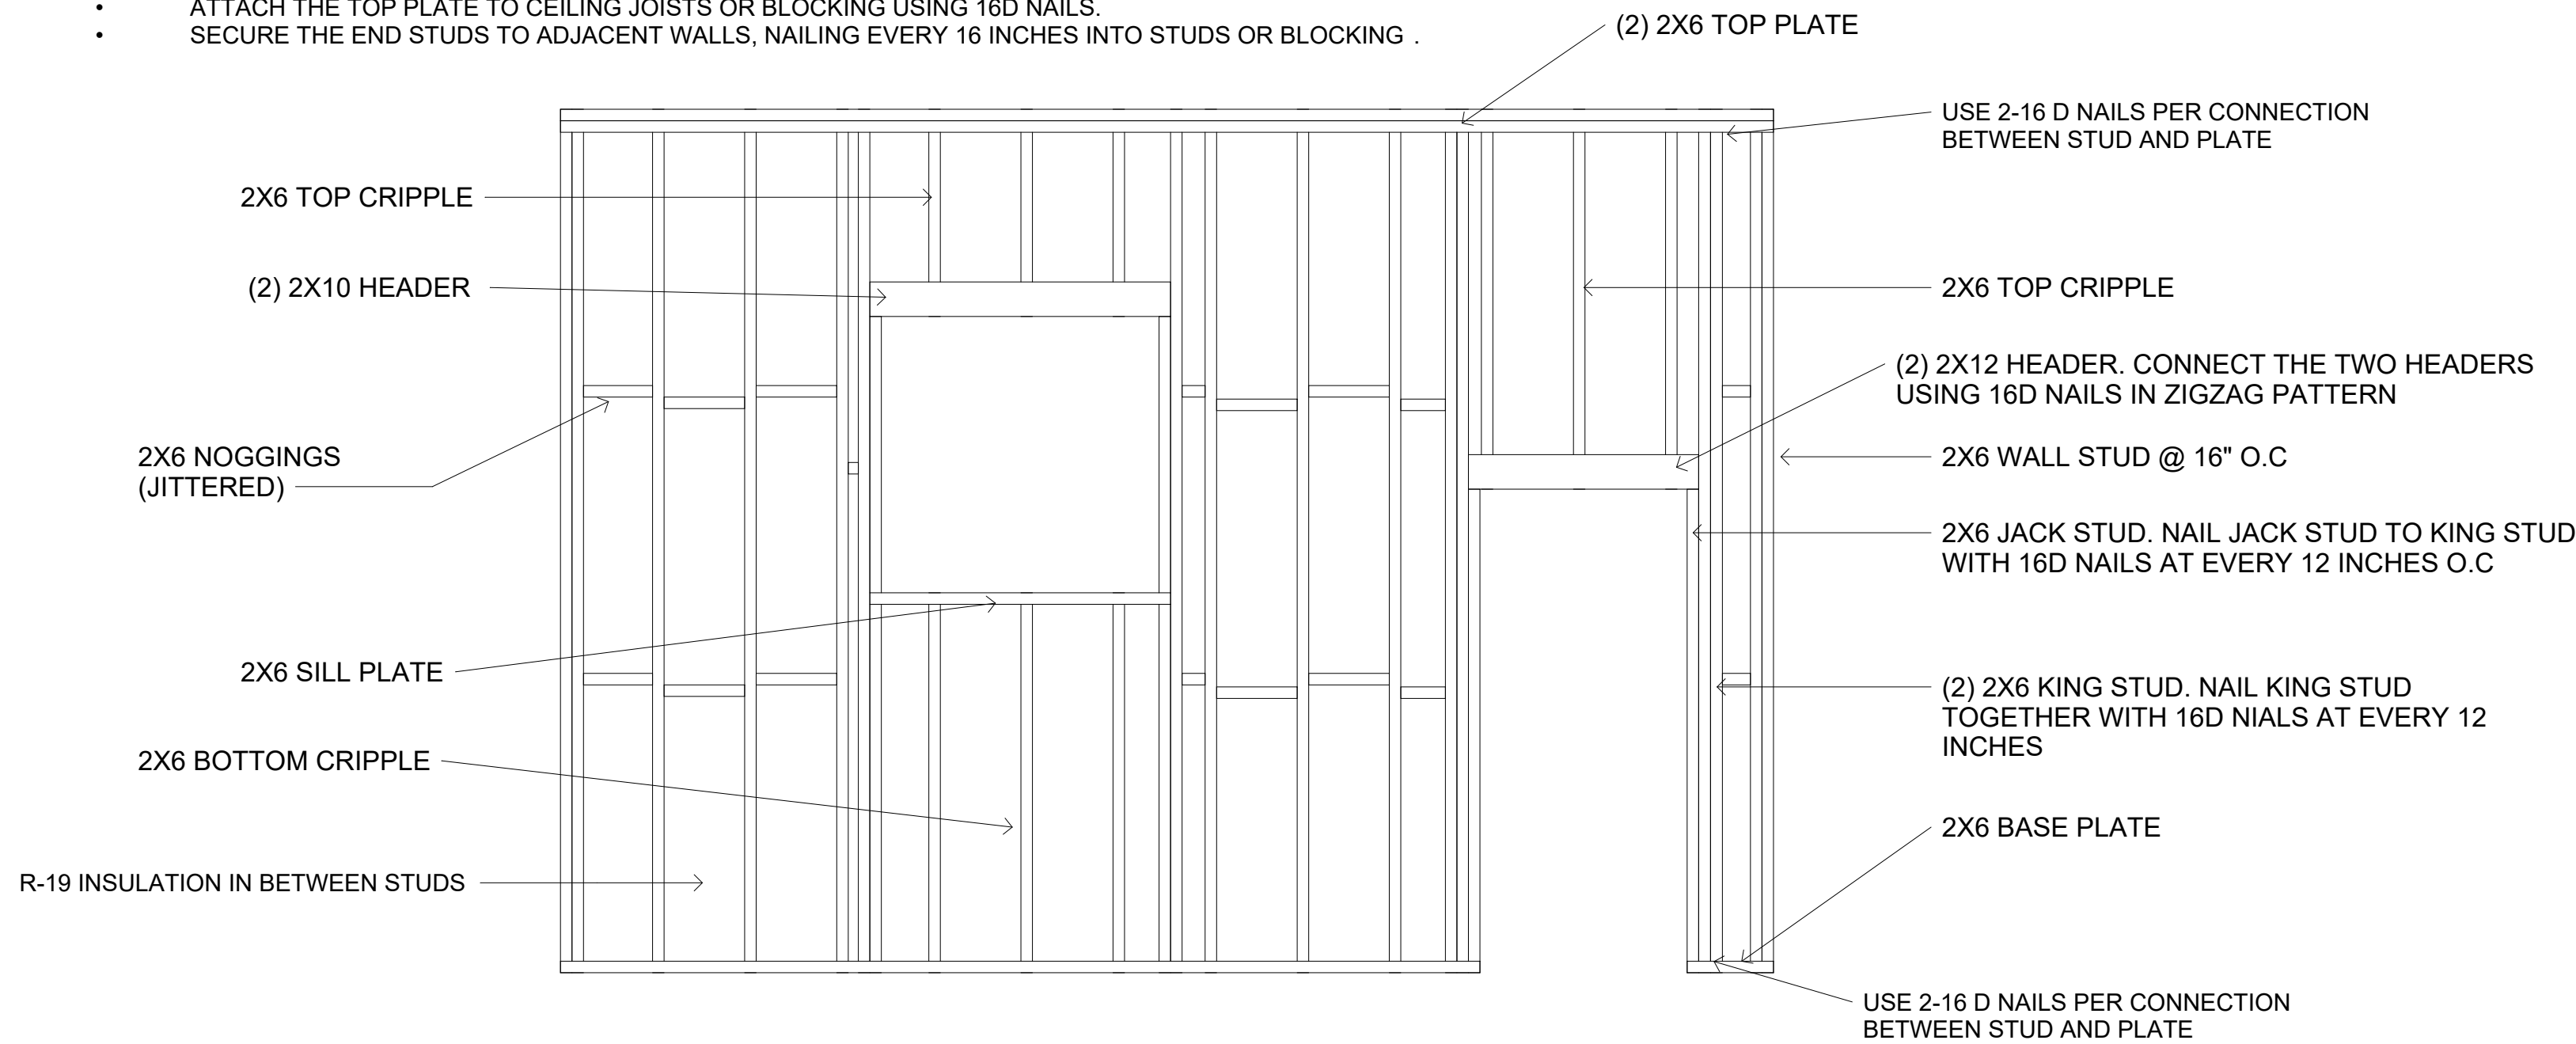

6 INCH STUD WALL DETAILS

1/2" = 1'-0"

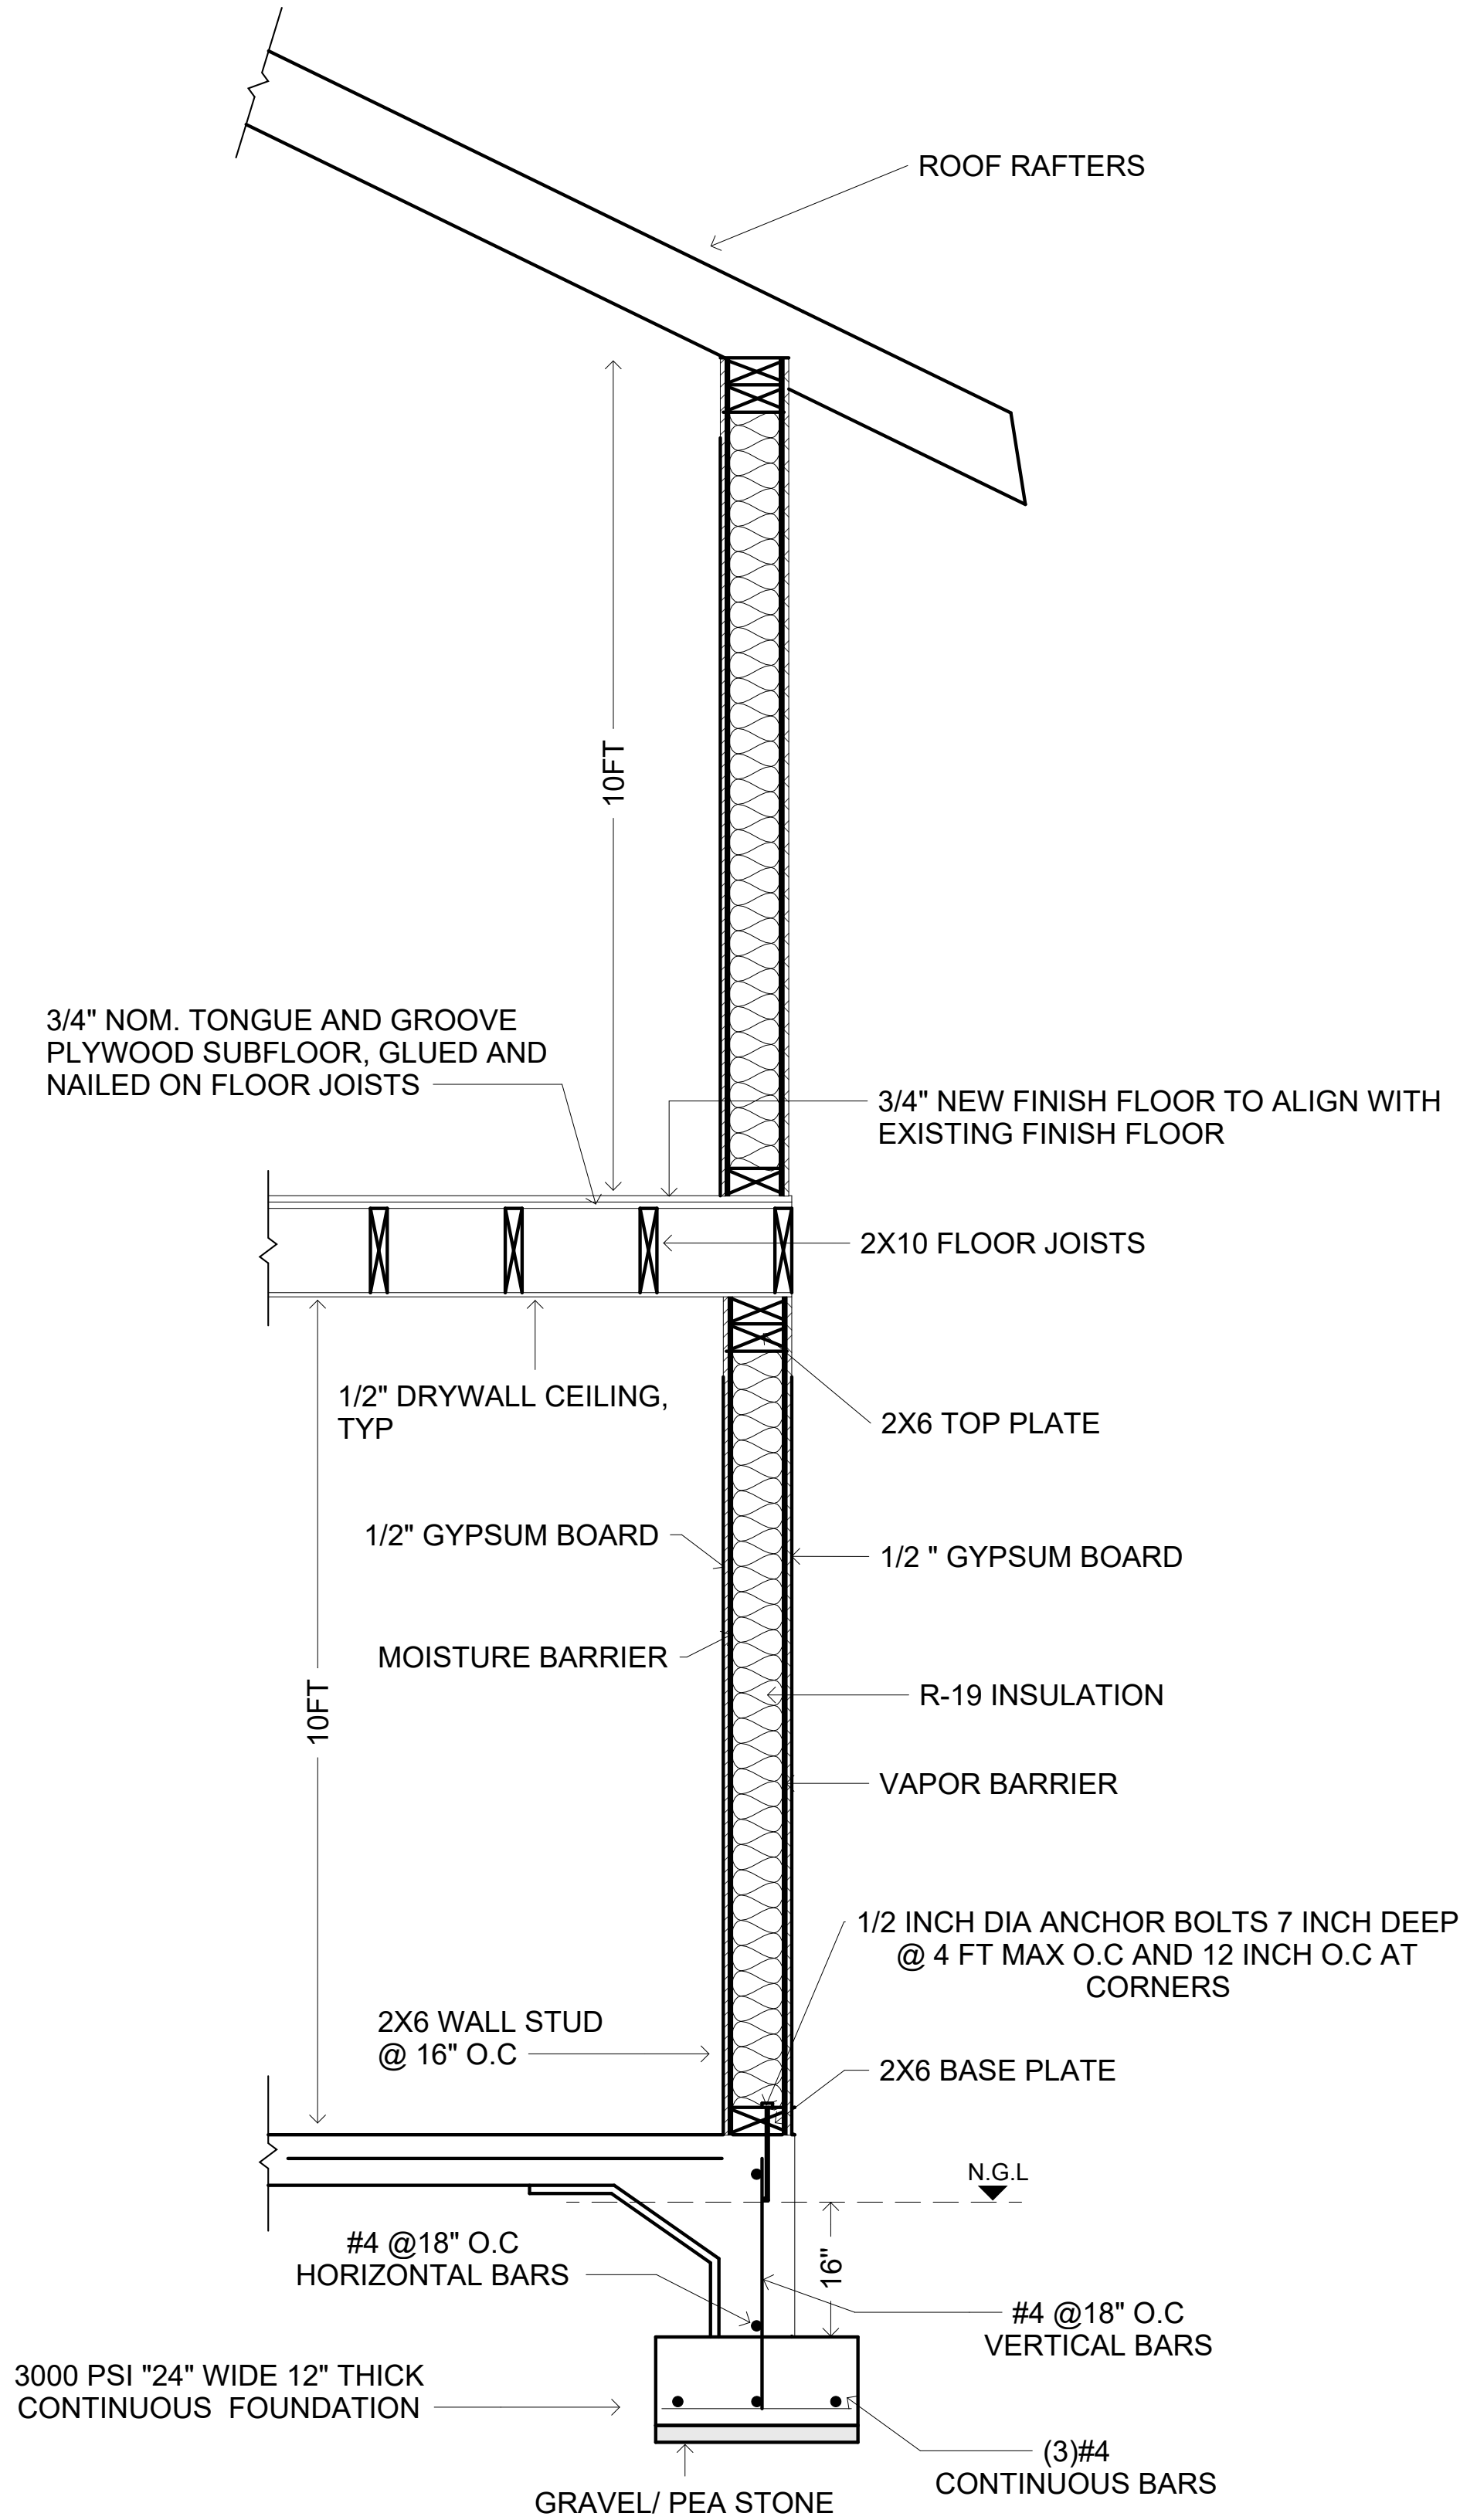

WALL CROSS SECTION

NTS

CLIENT

266 MORRO AVE

NOTES:


ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

**DRAWING NAME
WALL DETAILS A**


Project number J-1497
Date 28 JAN - 2026
Drawn by ARI
Checked by AZ

S7


Scale As indicated

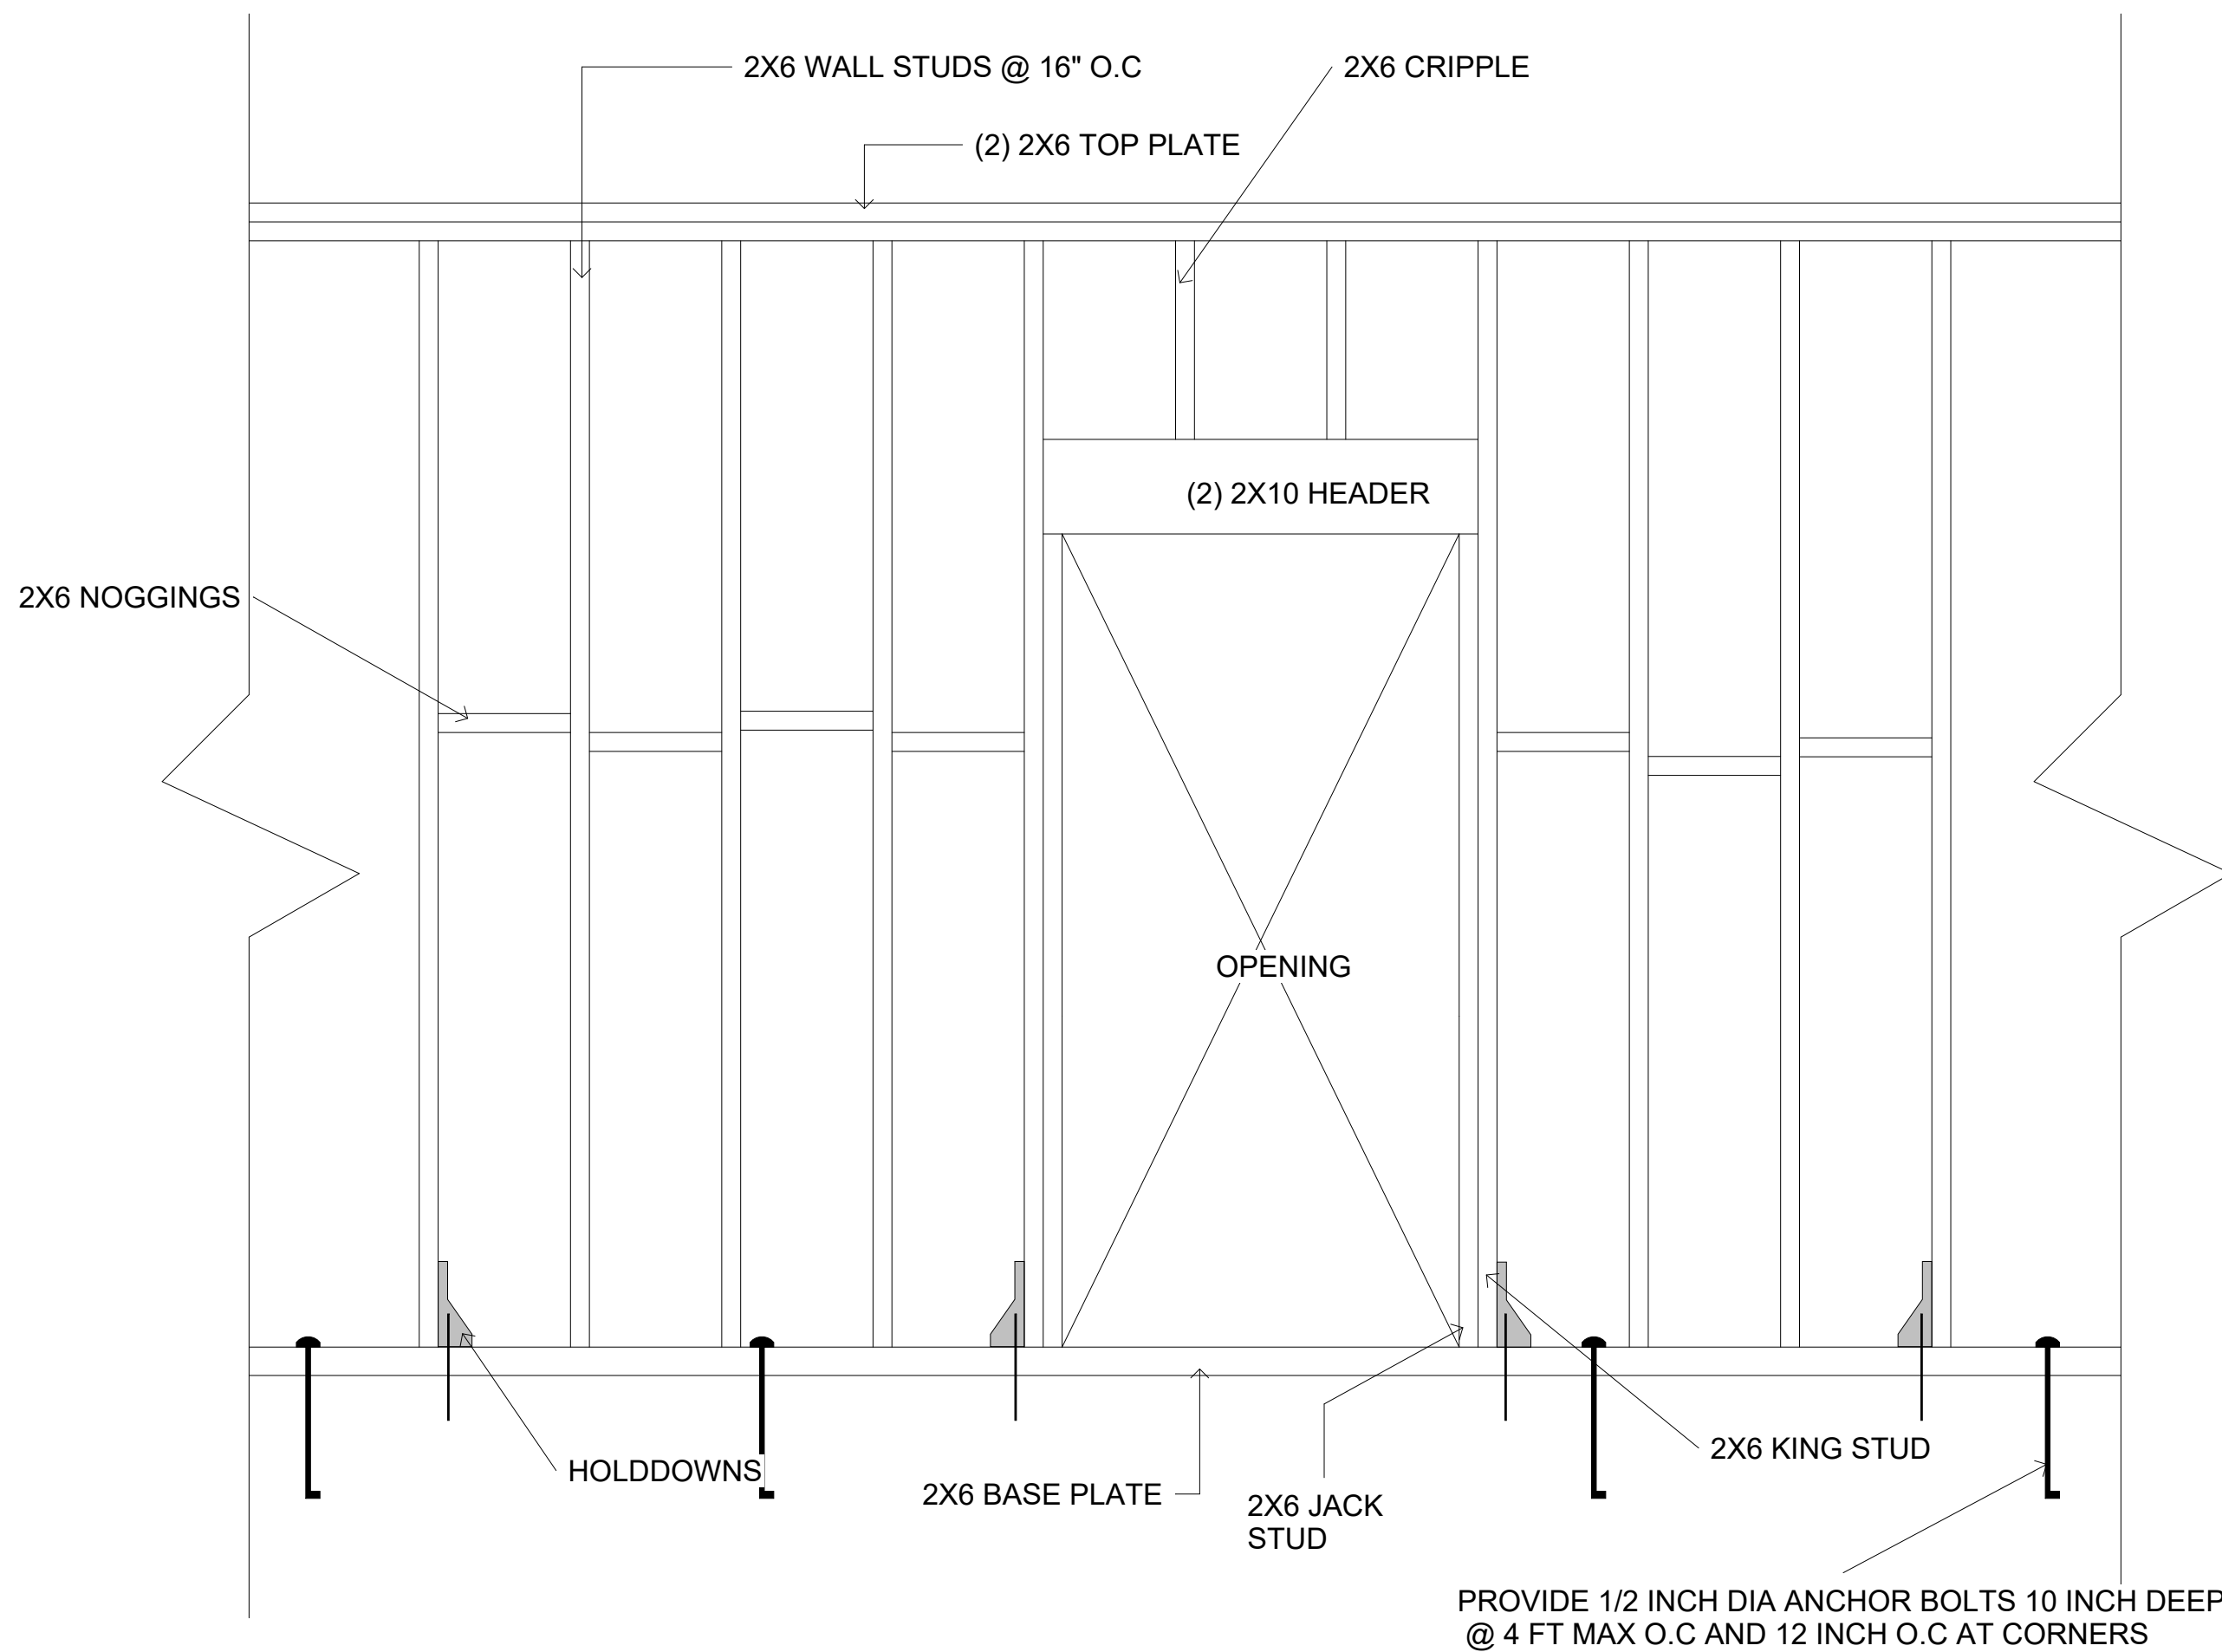


1 DOOR OPENING DETAILS
NTS

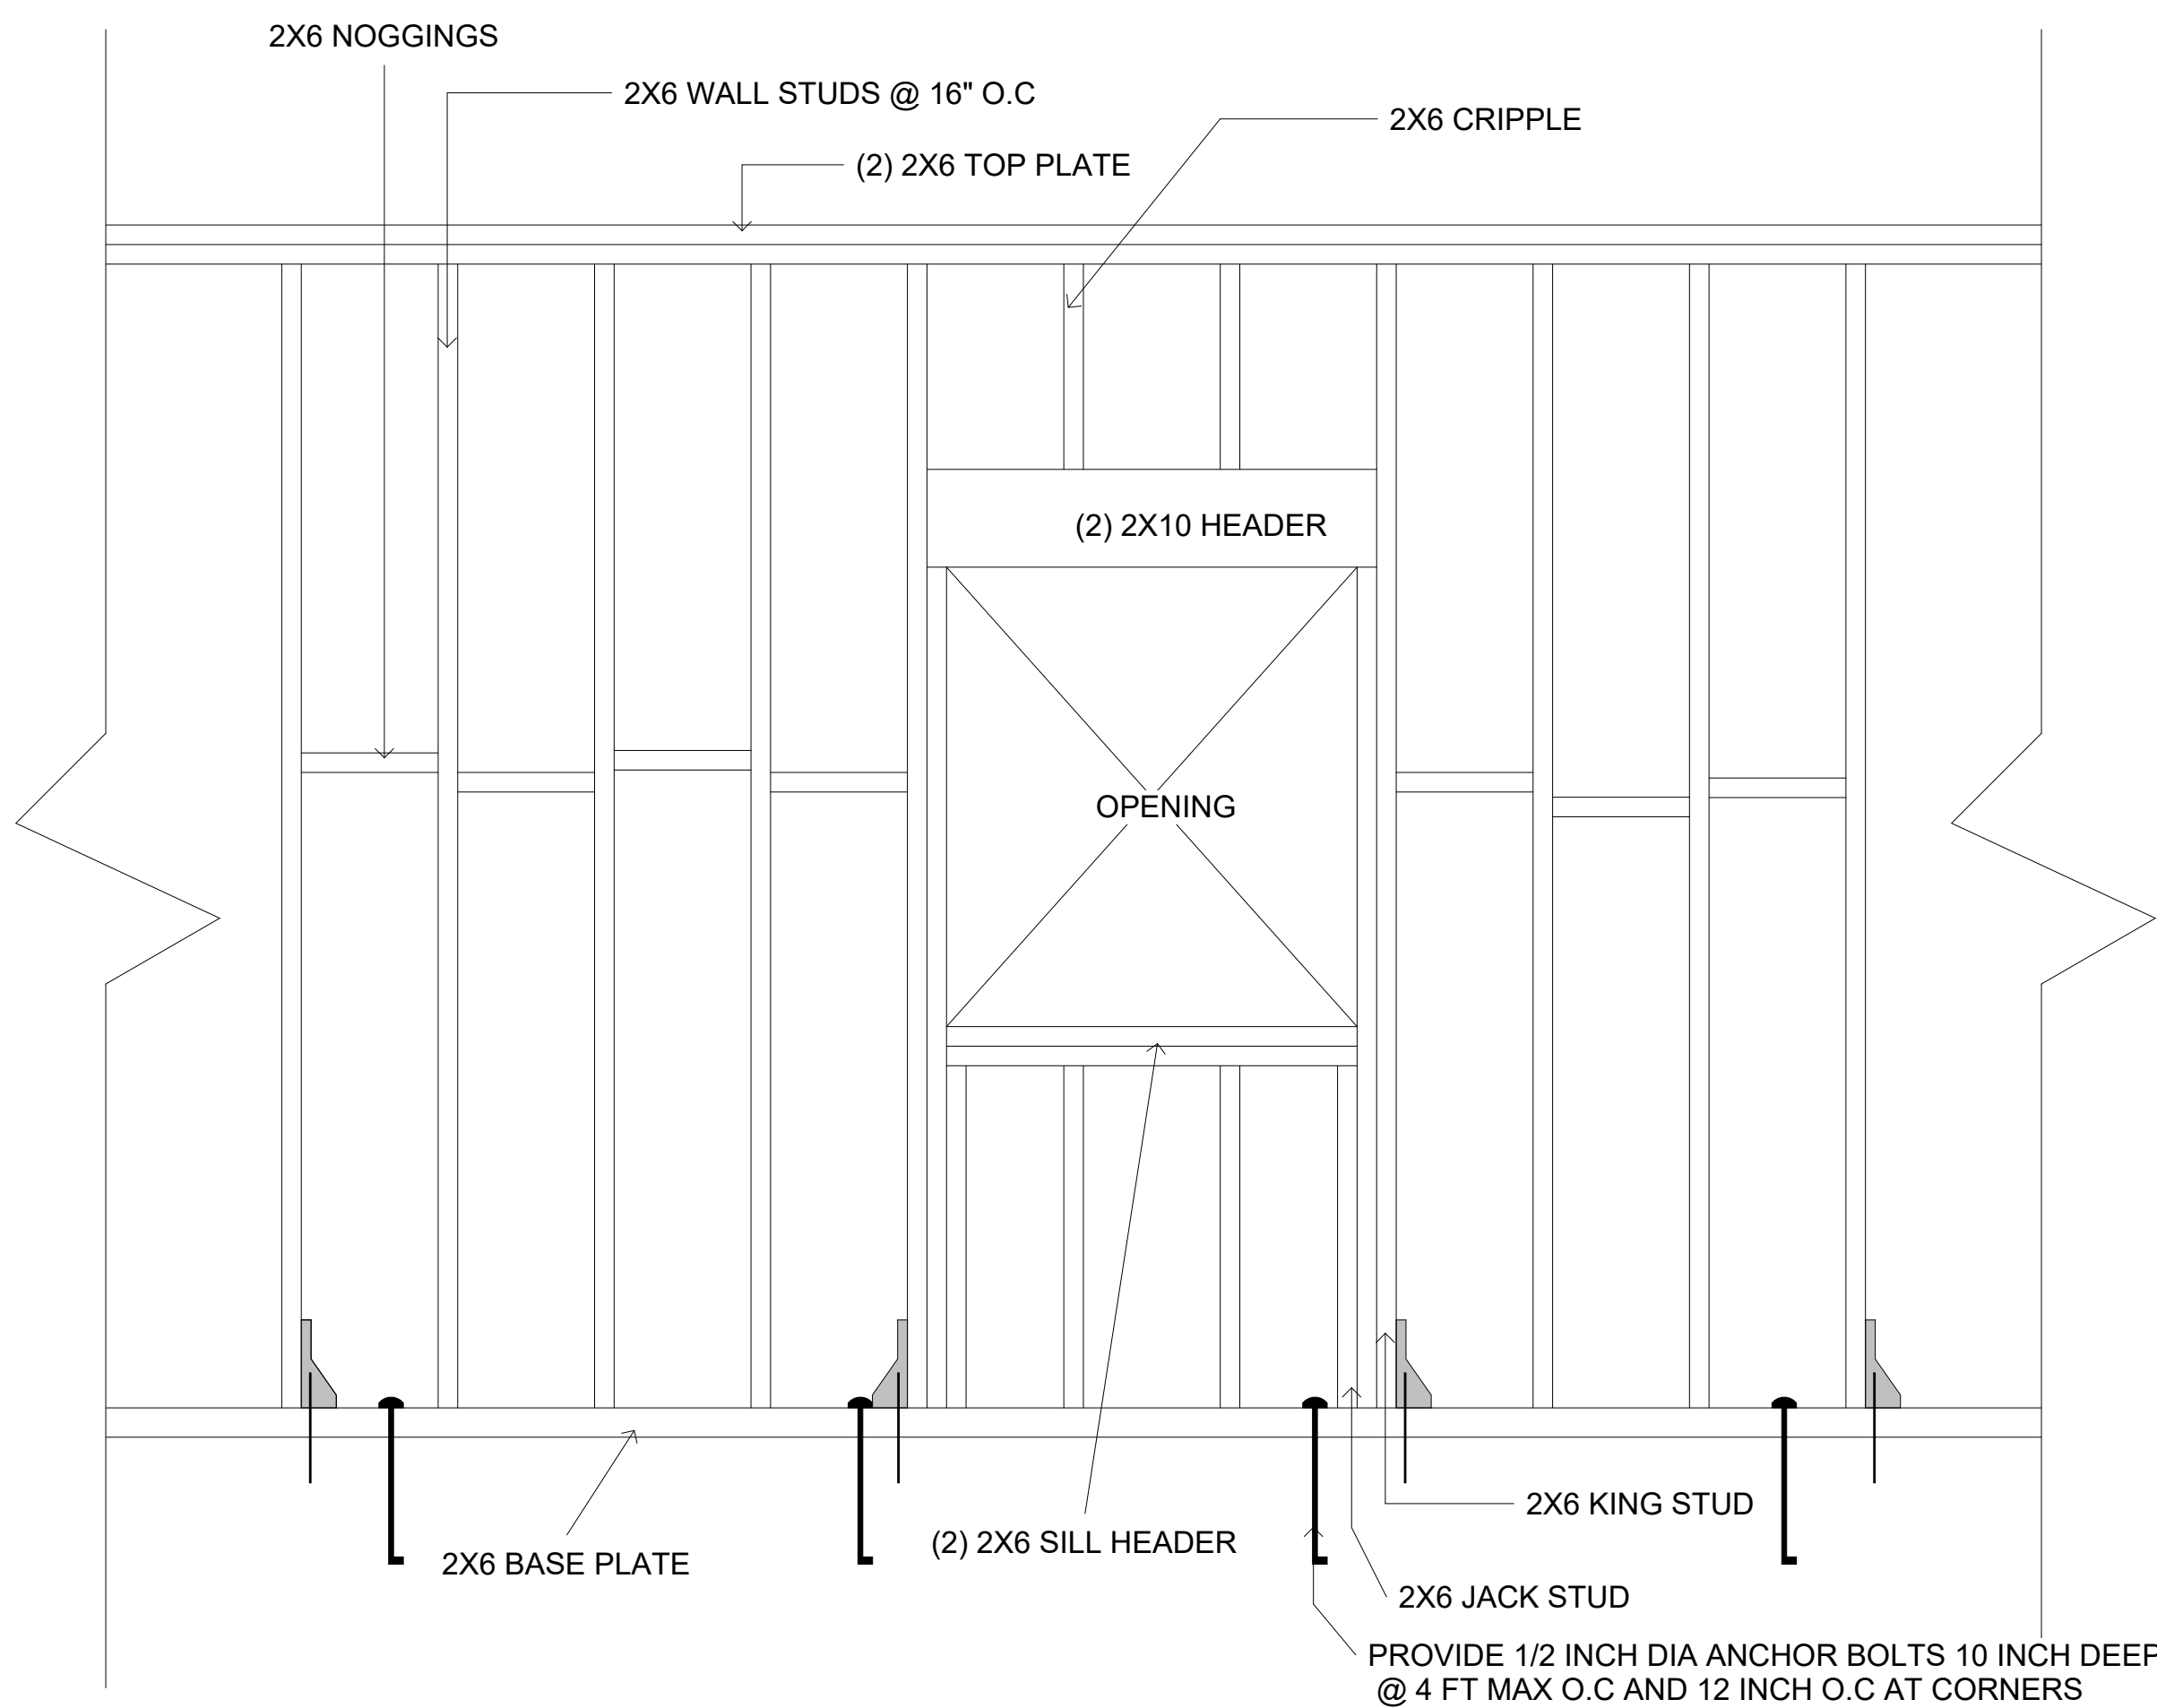


2 WINDOW OPENING DETAILS
NTS

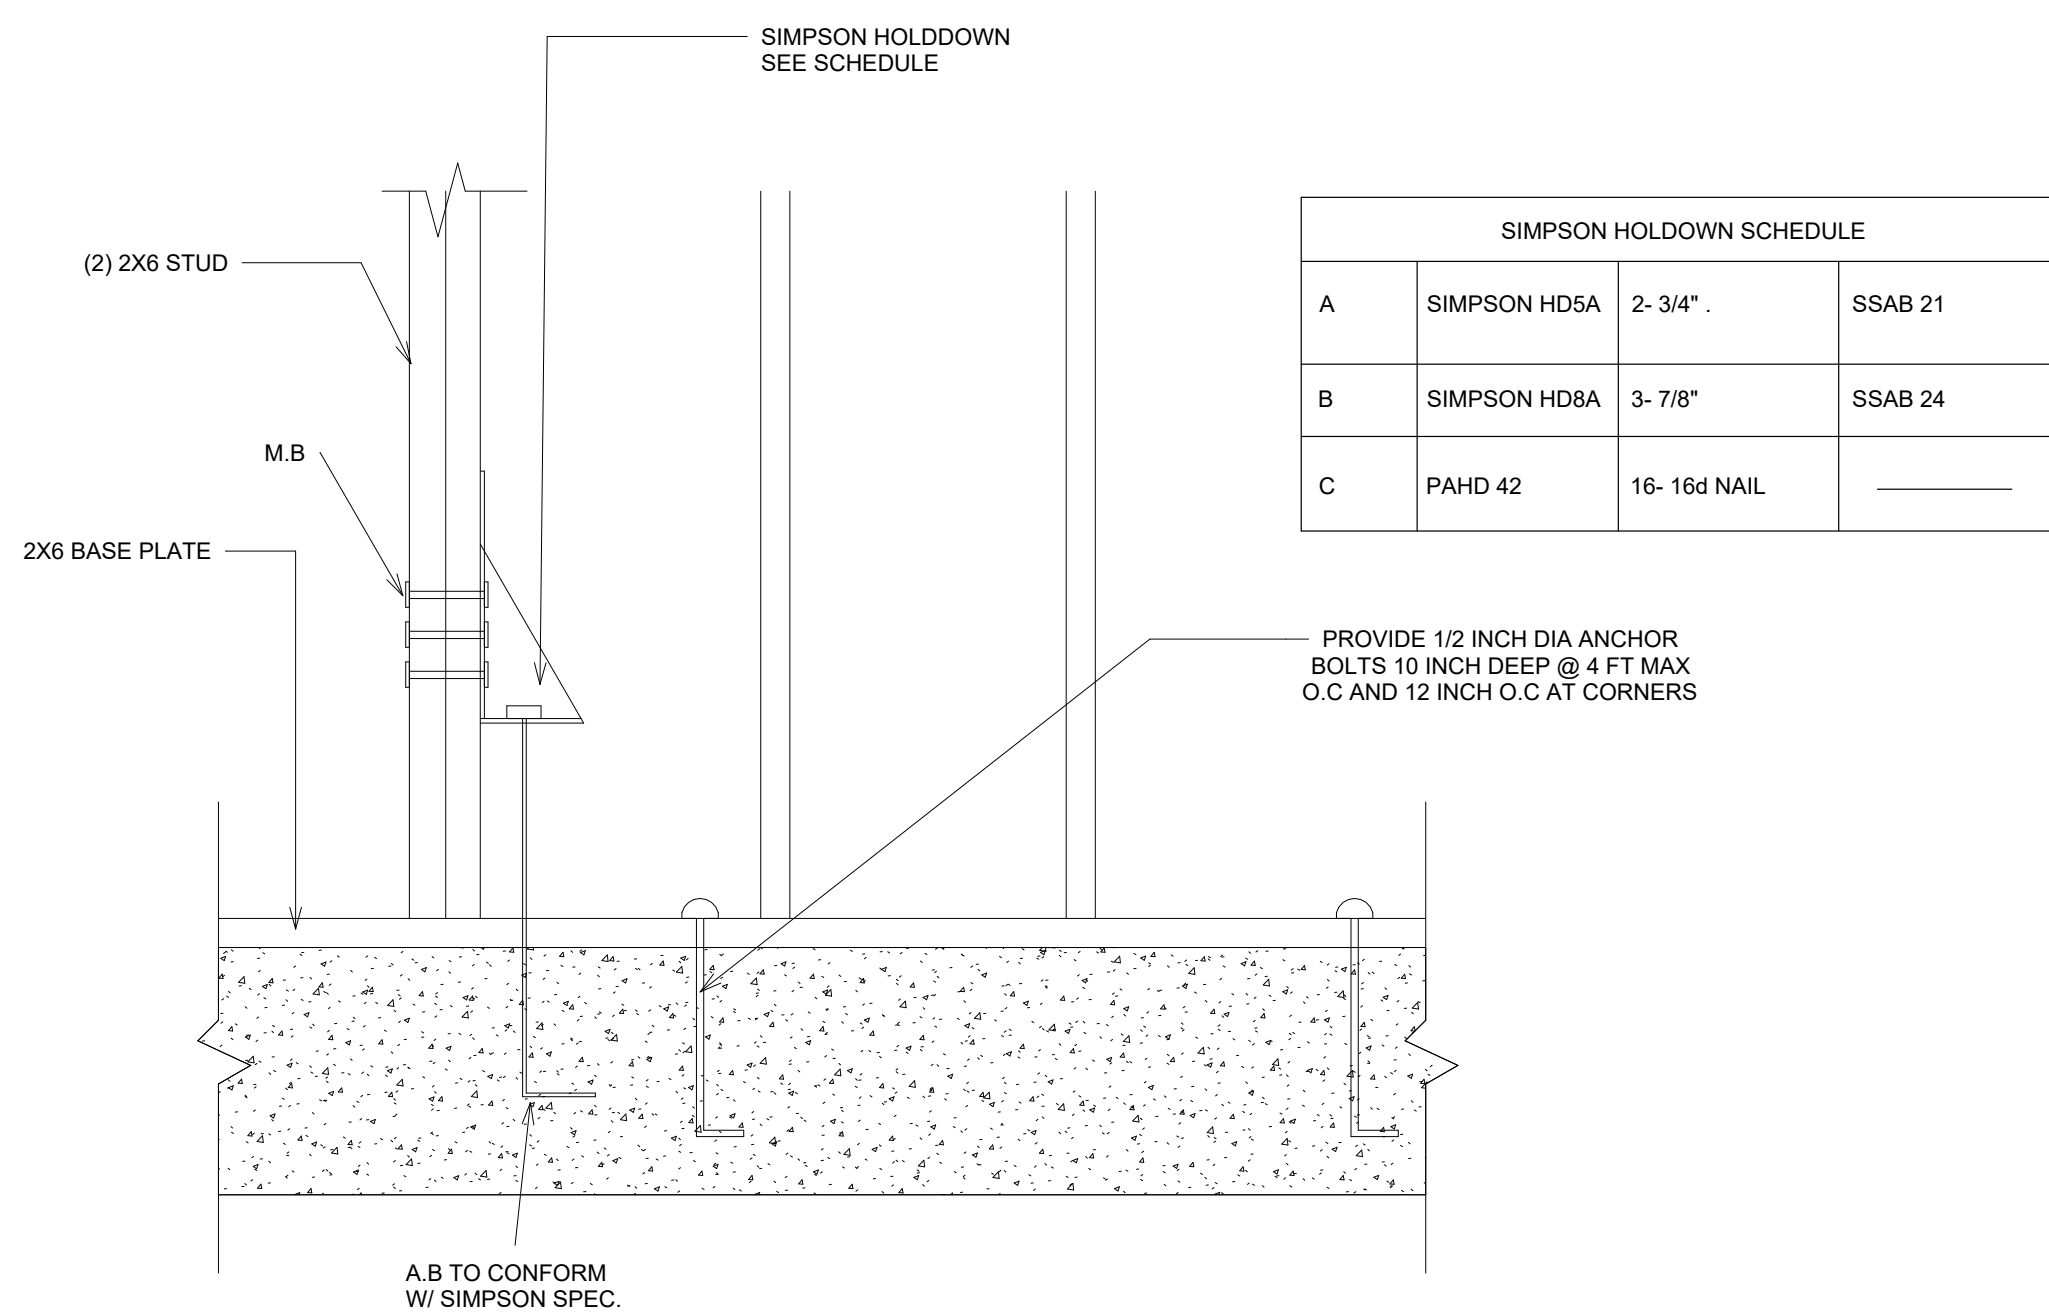

7 HOLDDOWN DETAILS
NTS

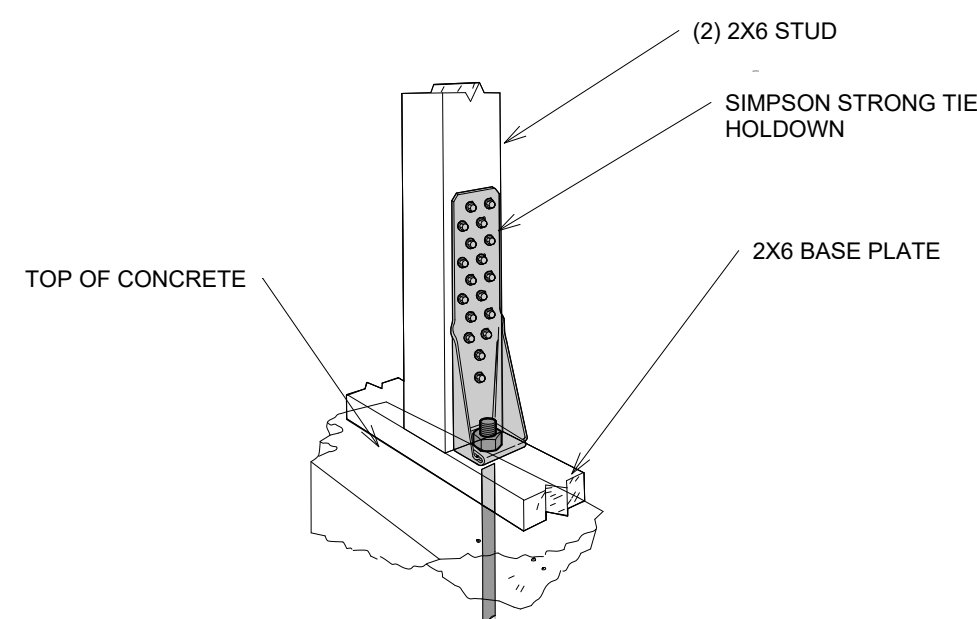

8 HOLD DOWN MODEL
NTS

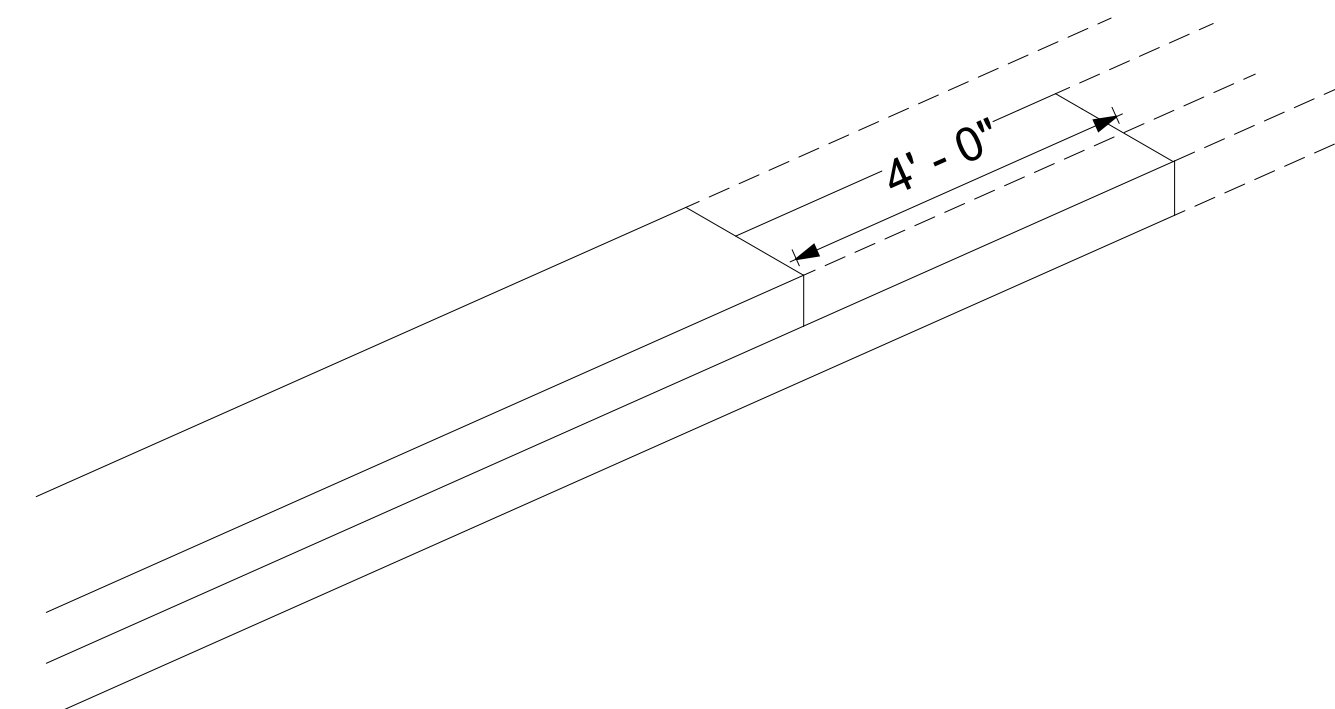

9 TOP PLATE SPLICE
NTS

CLIENT

266 MORRO AVE

NOTES:


ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
WALL DETAILS B

Project number J-1497
Date 28 JAN - 2026
Drawn by ARI
Checked by AZ


S8

Scale As indicated

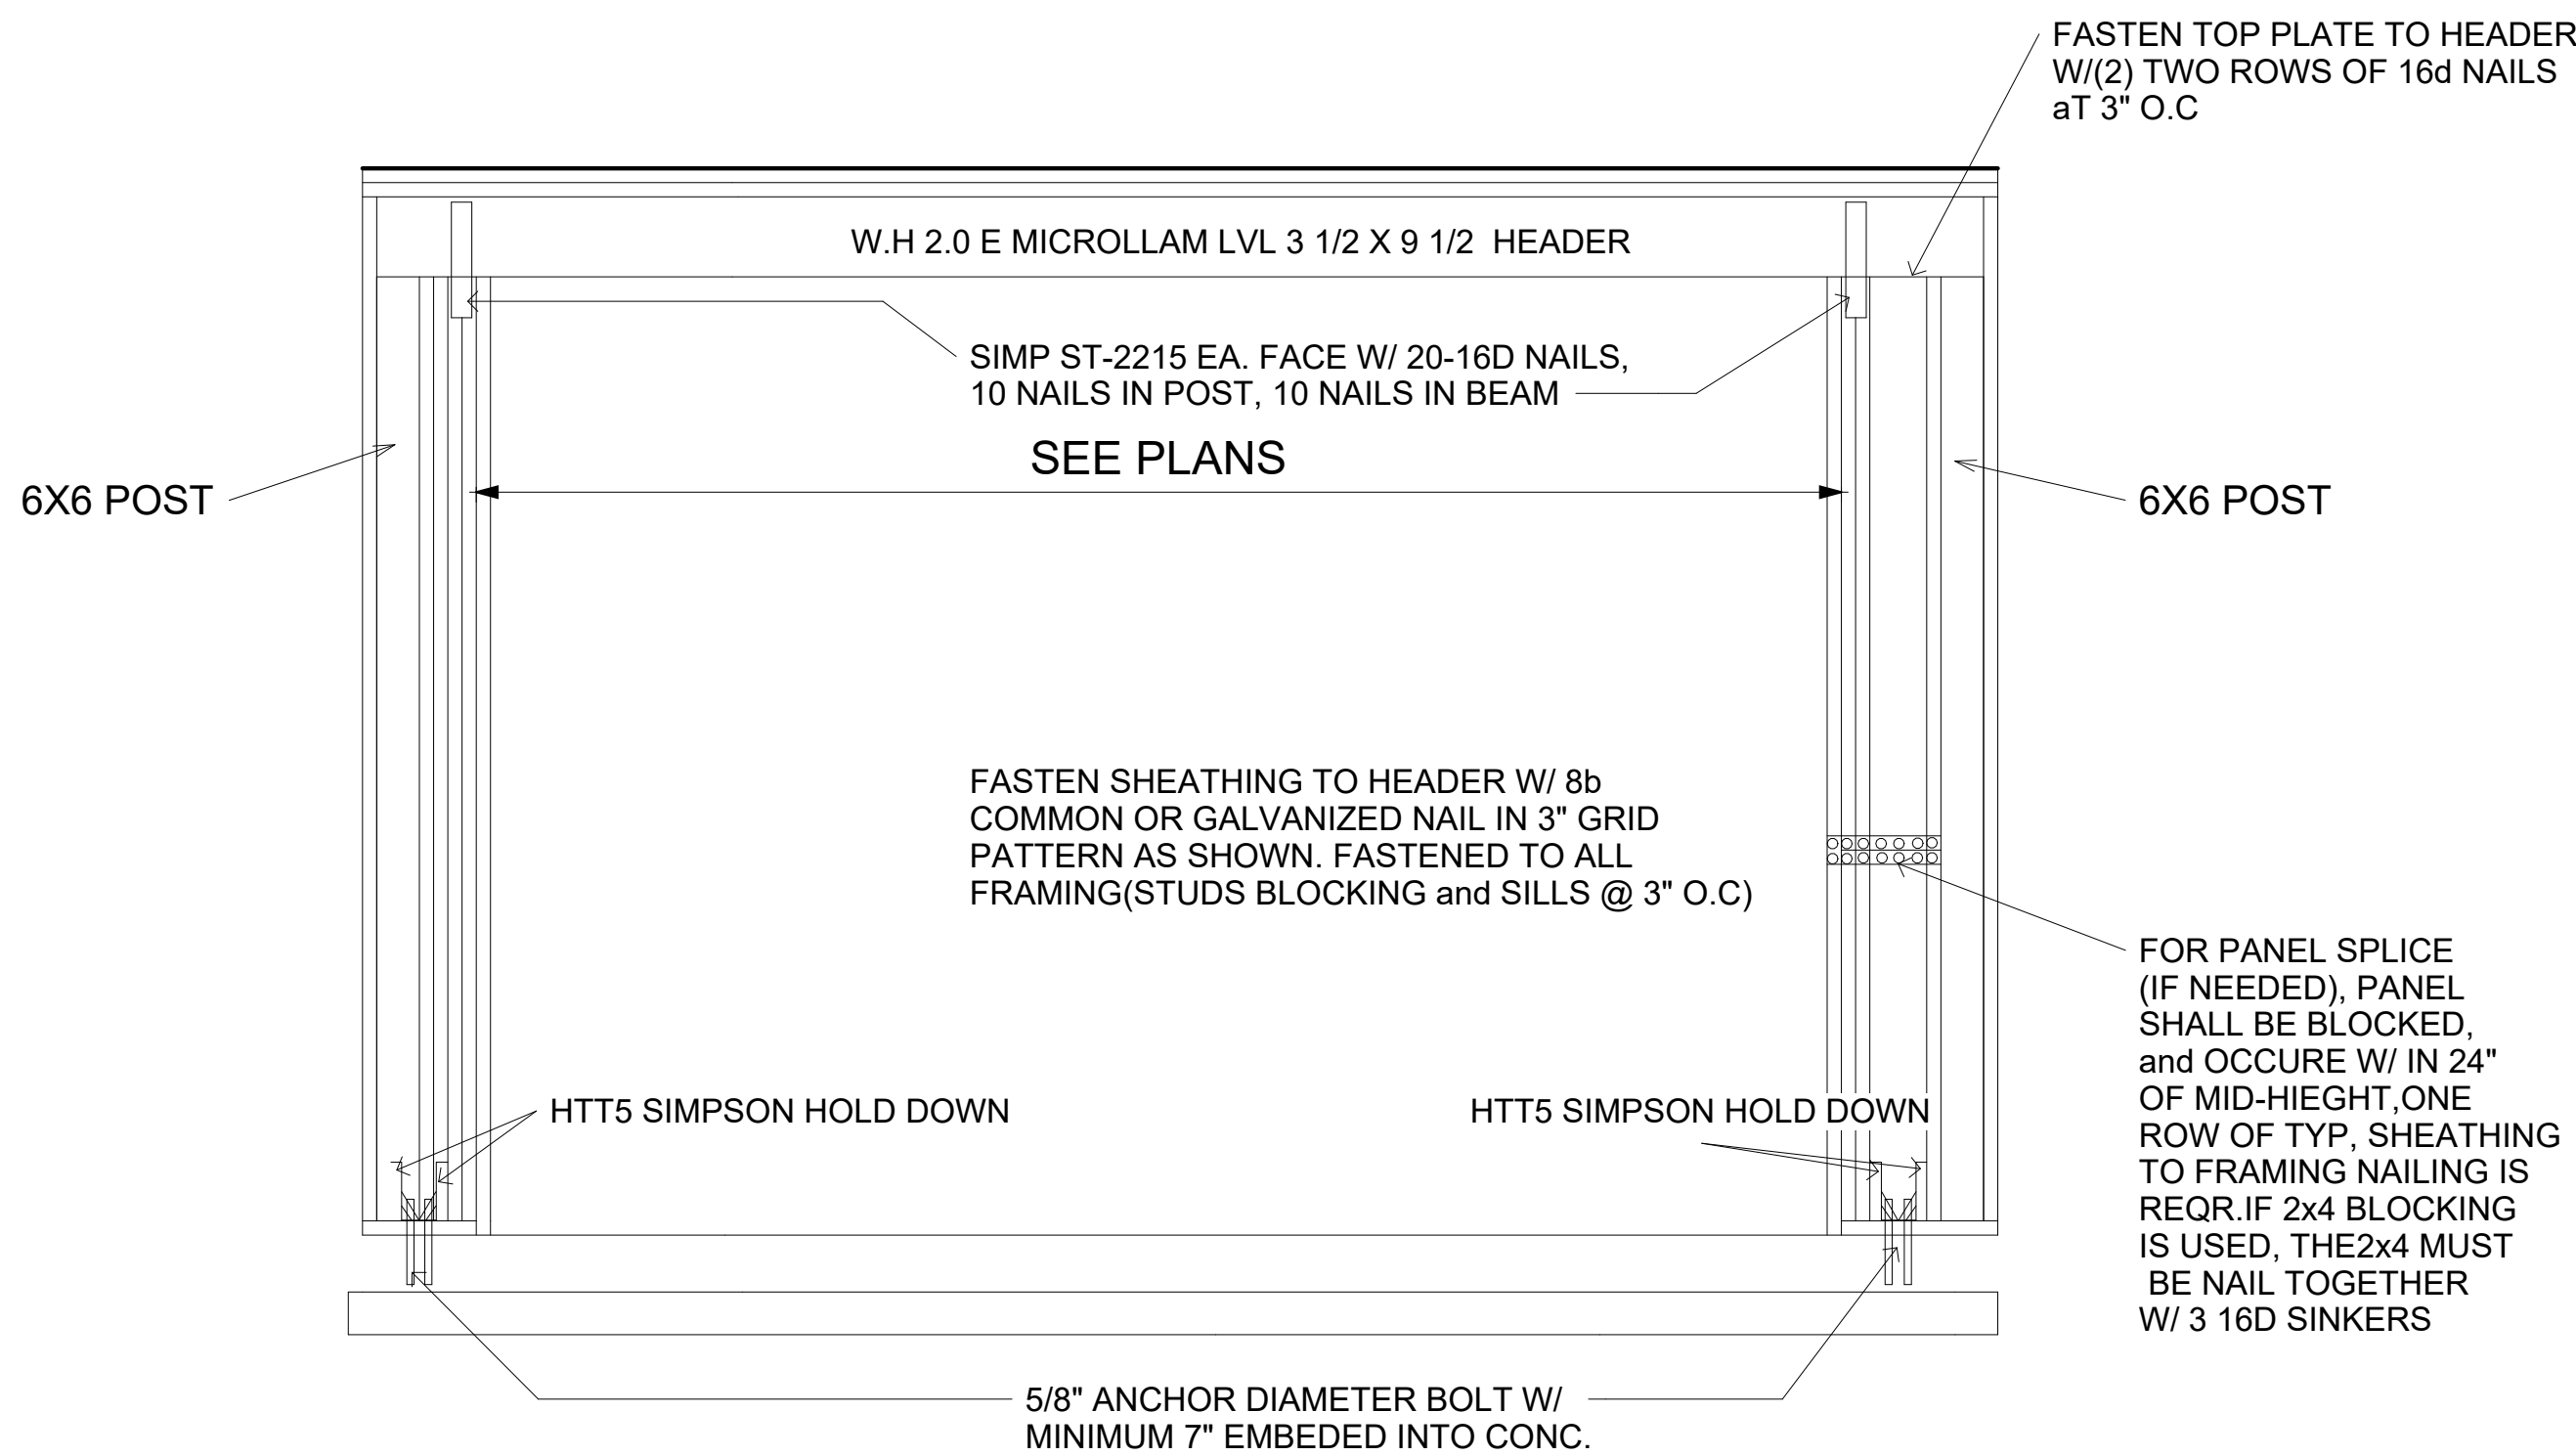

DOUBLE PORTAL FRAME



1 PORTAL FRAMING
NTS

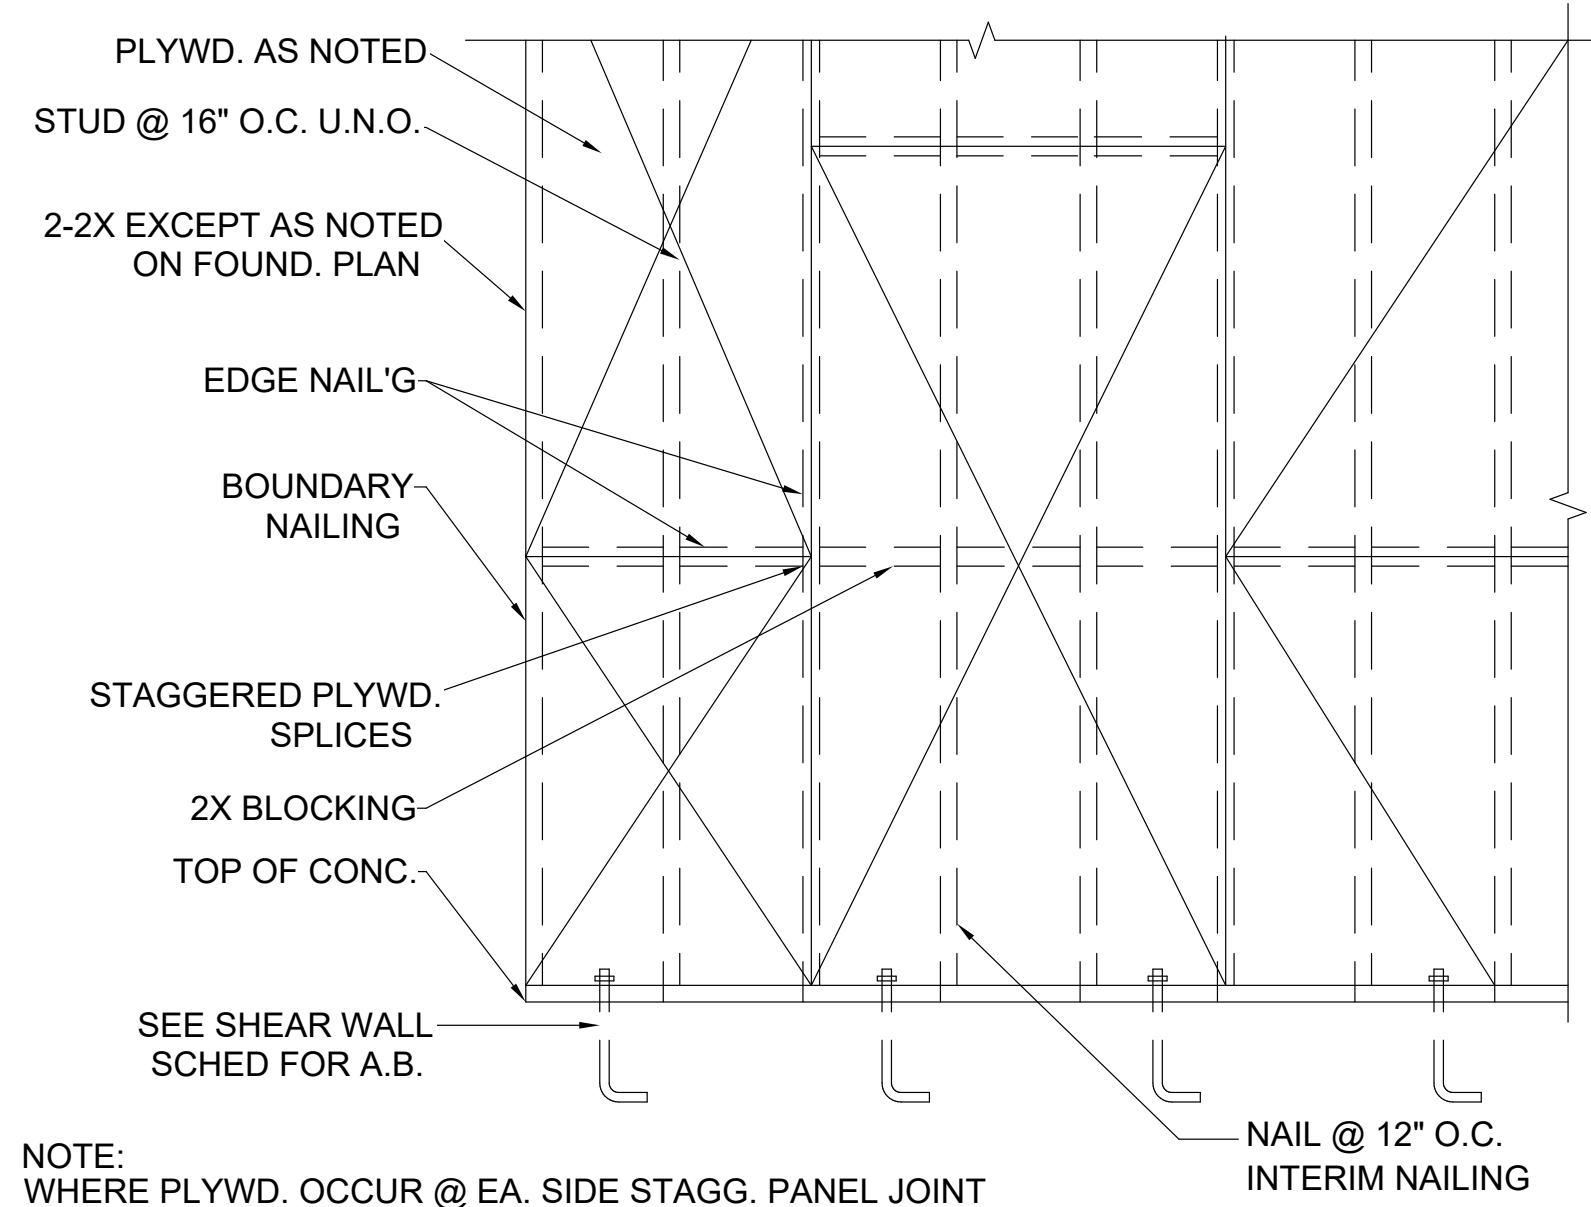


4 TYPICAL WALL SHEATHING
NTS

STUDS	MAX. UNSUPPORTED HEIGHT*	
	BEAR'G WALL	NON BEAR'G WALL
2 X 4 @ 16"	10'-0"	14'-0"
2 X 6 @ 16"	14'-0"	20'-0"
2 X 8 @ 16"	18'-0"	24'-0"

*MAX. DISTANCE BETWEEN FLOOR & ROOF

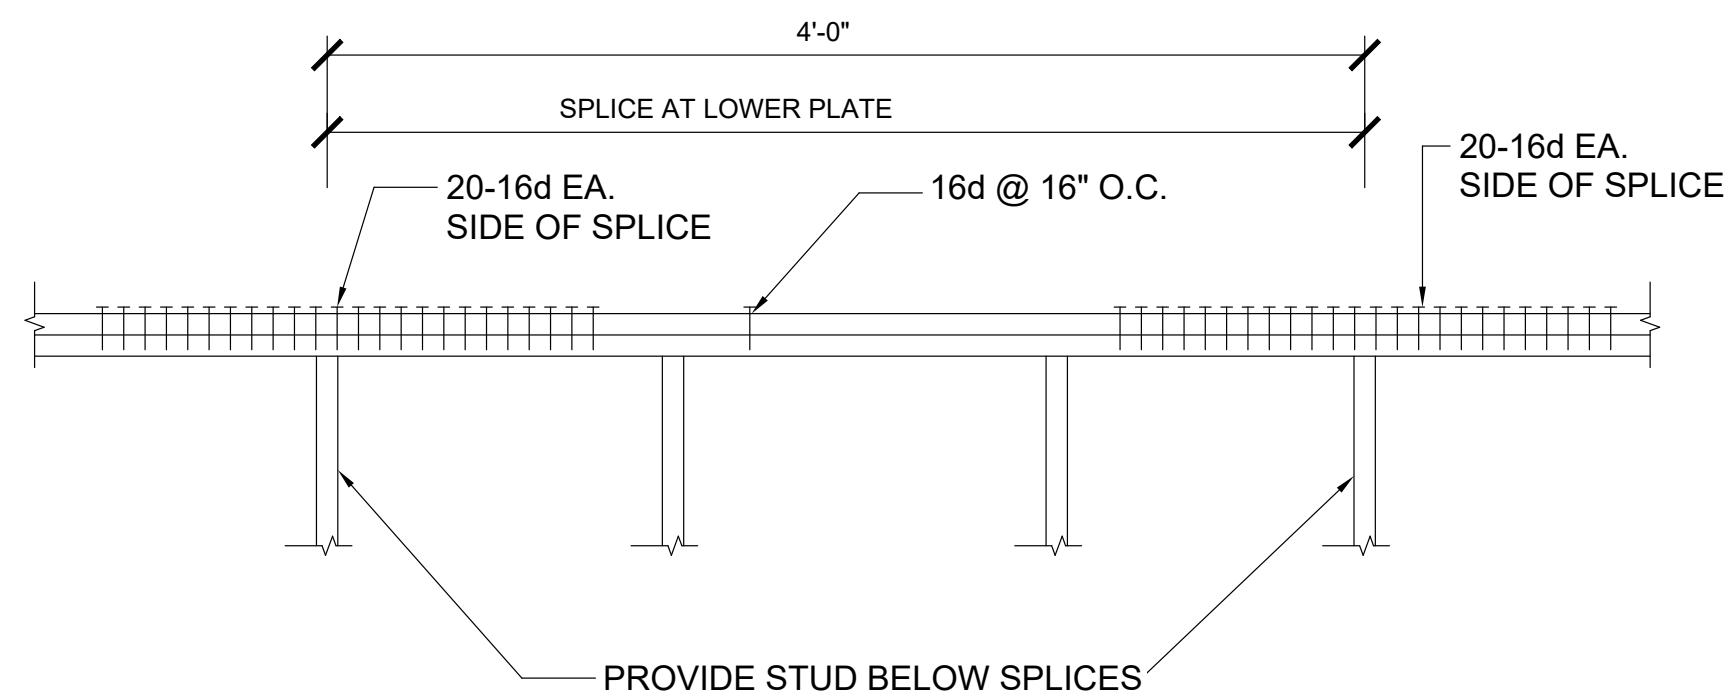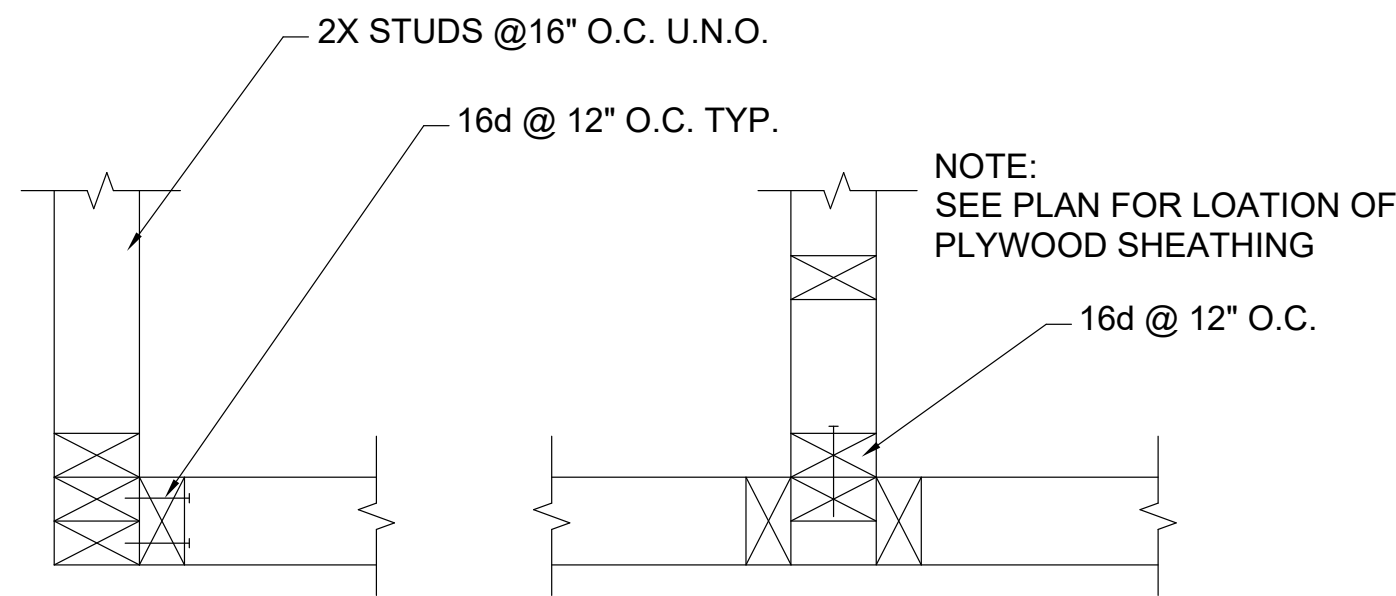

MIN. PLATE SPLICE DETAIL

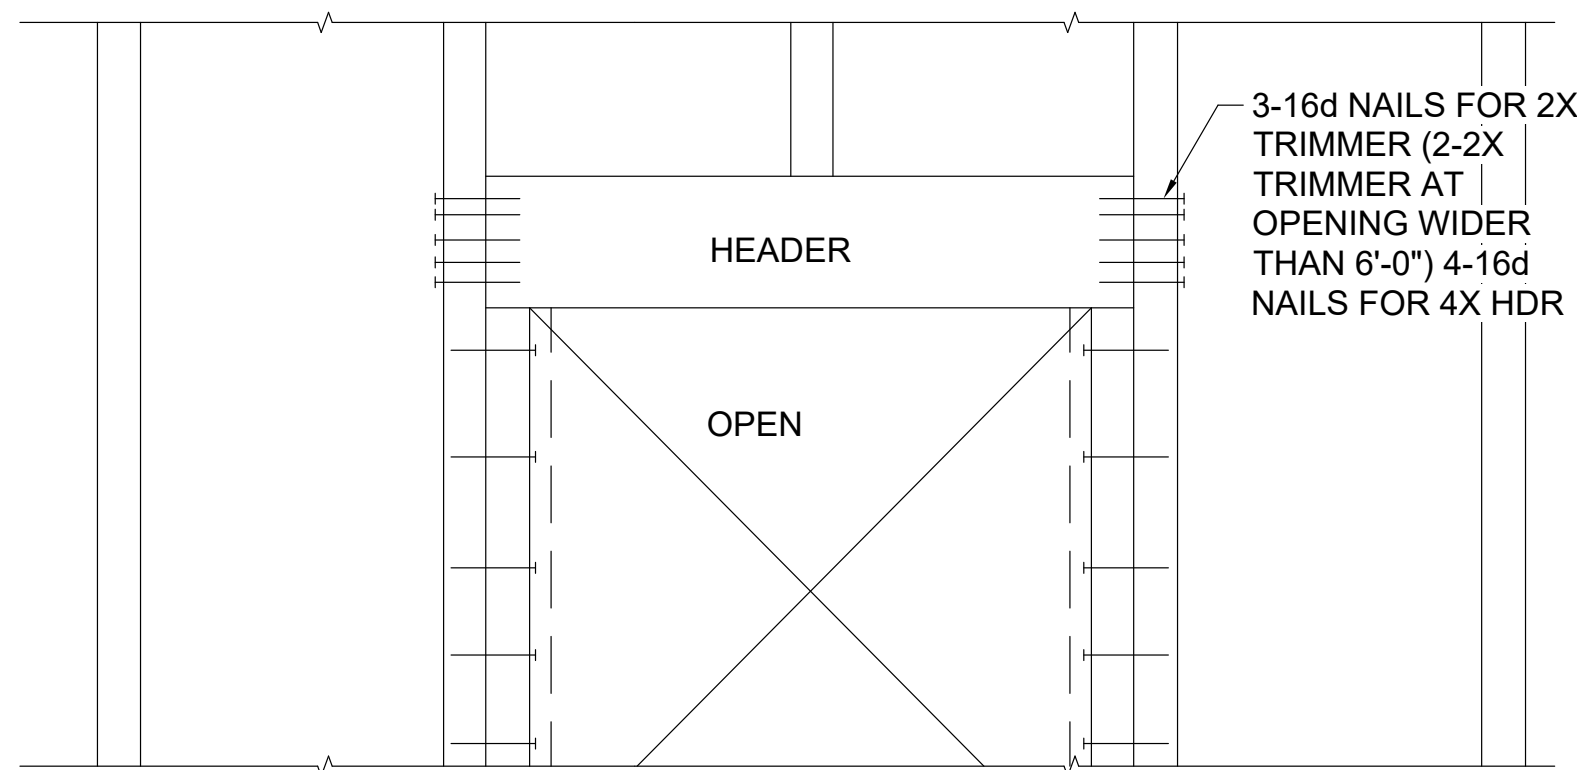

5 TYPICAL HEADER NAILING DETAIL
NTS

CLIENT

266 MORRO AVE

NOTES:

ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
WALL DETAILS C

Project number J-1497
Date 28 JAN - 2026
Drawn by ARI
Checked by AZ

S9

Scale As indicated

MINIMUM WALL AND HEADER STUD REQUIREMENTS

Unsupported Wall Height	Stud Spacing	Maximum Header Span (ft.)					
		3'	6'	9'	12'	15'	18'
		Number of Header Studs Supporting End of Header					
10' or less	12 in. 16 in. 24 in.	1	2	3	3	3	3
		Number of Full-Length Studs at Each End of Header					
		2	2	3	3	3	3
greater than 10'	12 in. 16 in. 24 in.	2	2	3	4	5	5
		2	2	3	3	4	4
		1	2	2	2	3	3


* The header stud shall not be required if the header is supported by a suitable framing anchor.

UPLIFT CONNECTION AT LOAD BEARING WALL

INT. HEADER SCHEDULE	
OPENING	HEADER
UP TO 3' - 4"	2 - 2" x 6"
3' - 5" TO 5' - 4"	2 - 2" x 8"
5' - 5" TO 8' - 6"	2 - 2" x 10"
8' - 7" TO 12' - 6"	2 - 2" x 12"

STUD SIZE	LATERAL UNSUPPORTED STUD HEIGHT (FT.)	SUPPORTING ROOF AND CEILING ONLY (IN)	SUPPORTING 1 FLOOR, ROOF AND CEILING (IN)	SUPPORTING 1 FLOOR, ROOF AND CEILING (IN)
2x4	10	24	16	-
3x4	10	24	24	16
2x5	10	24	24	-
2x6	10	24	24	16


MAXIMUM STUD SPACING

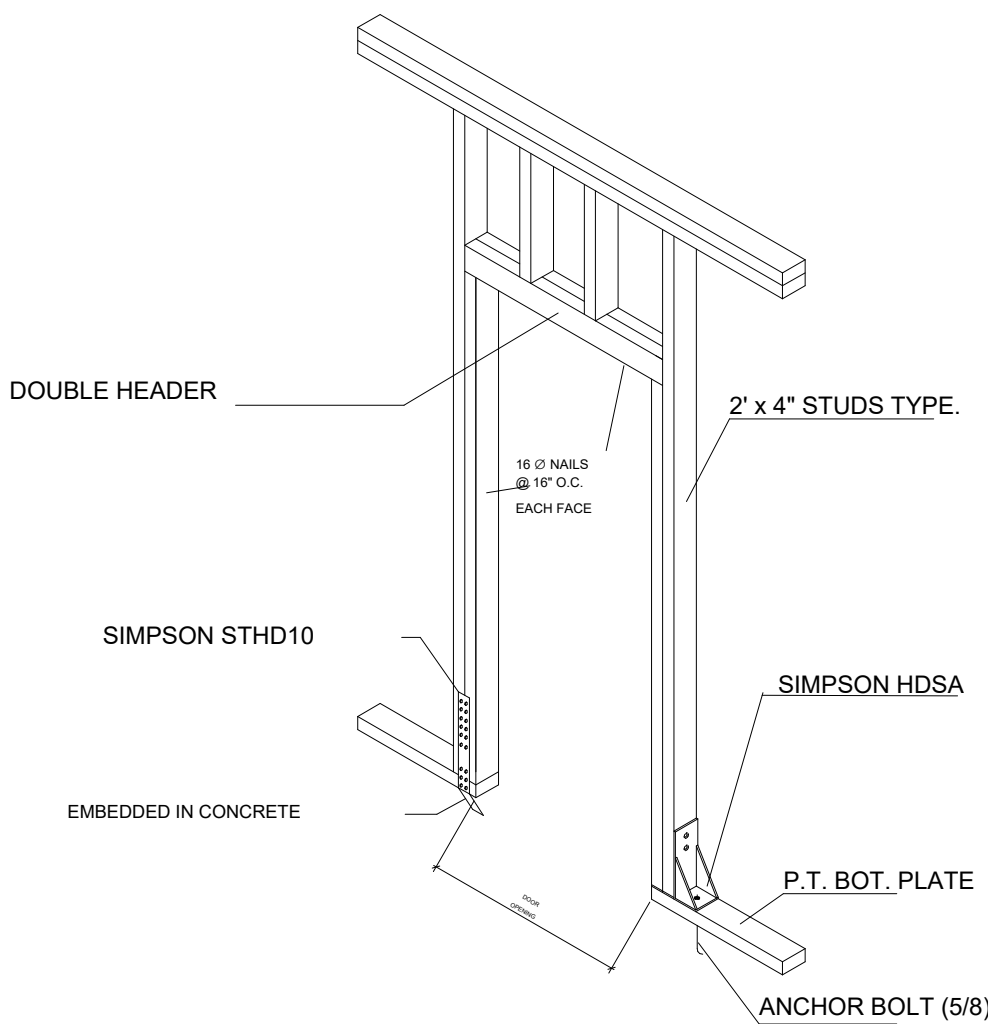

HEADER DETAIL

3 HEADER SCHEDULE


1" = 1'-0"

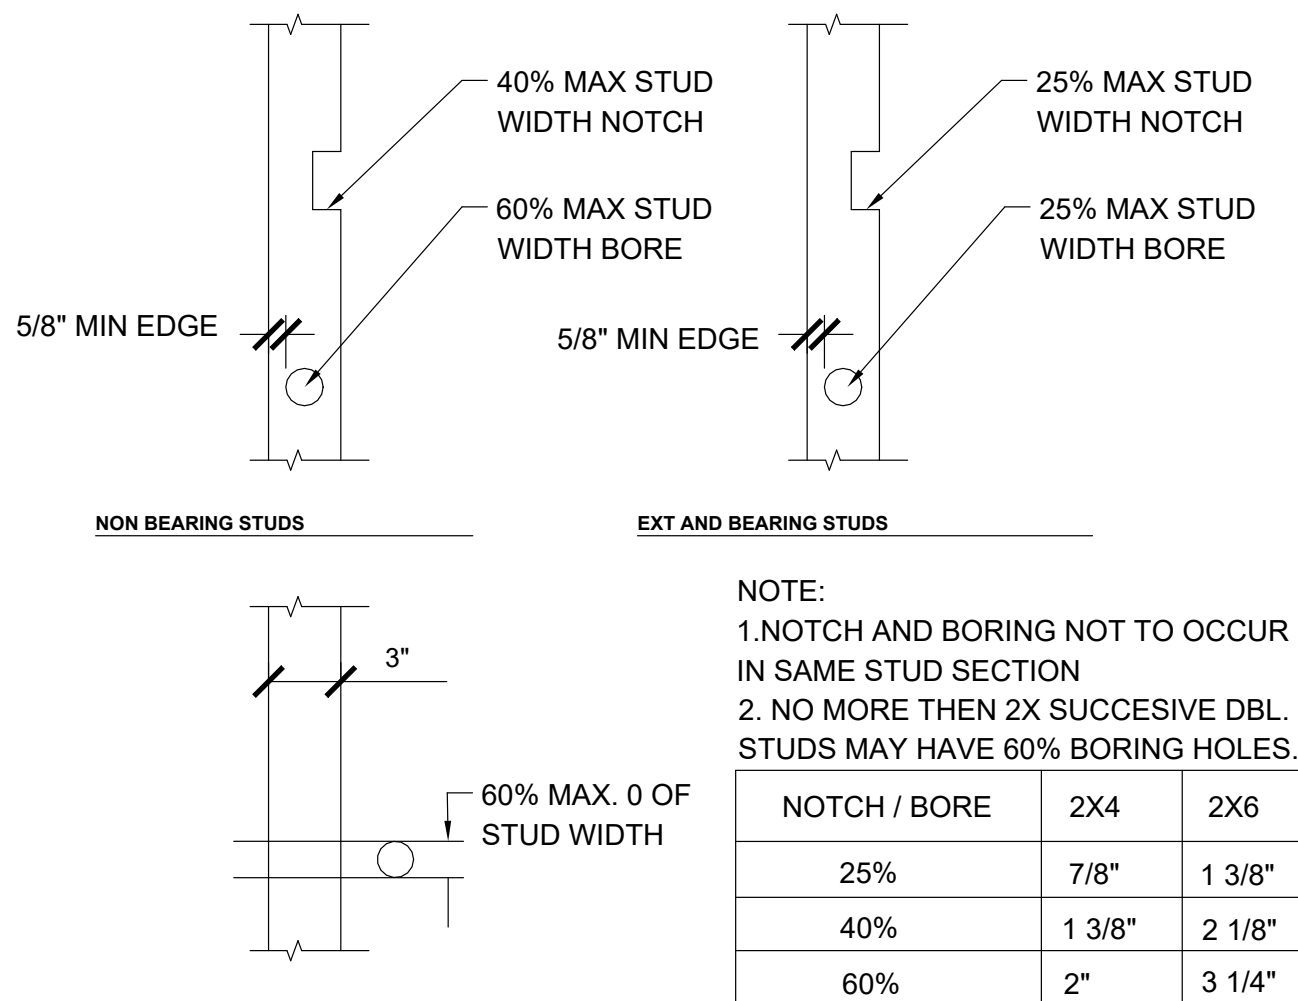

1 NOTCHING AND BORING

NTS

CONTINUOUS STRUCTURAL PANEL SHEATHING

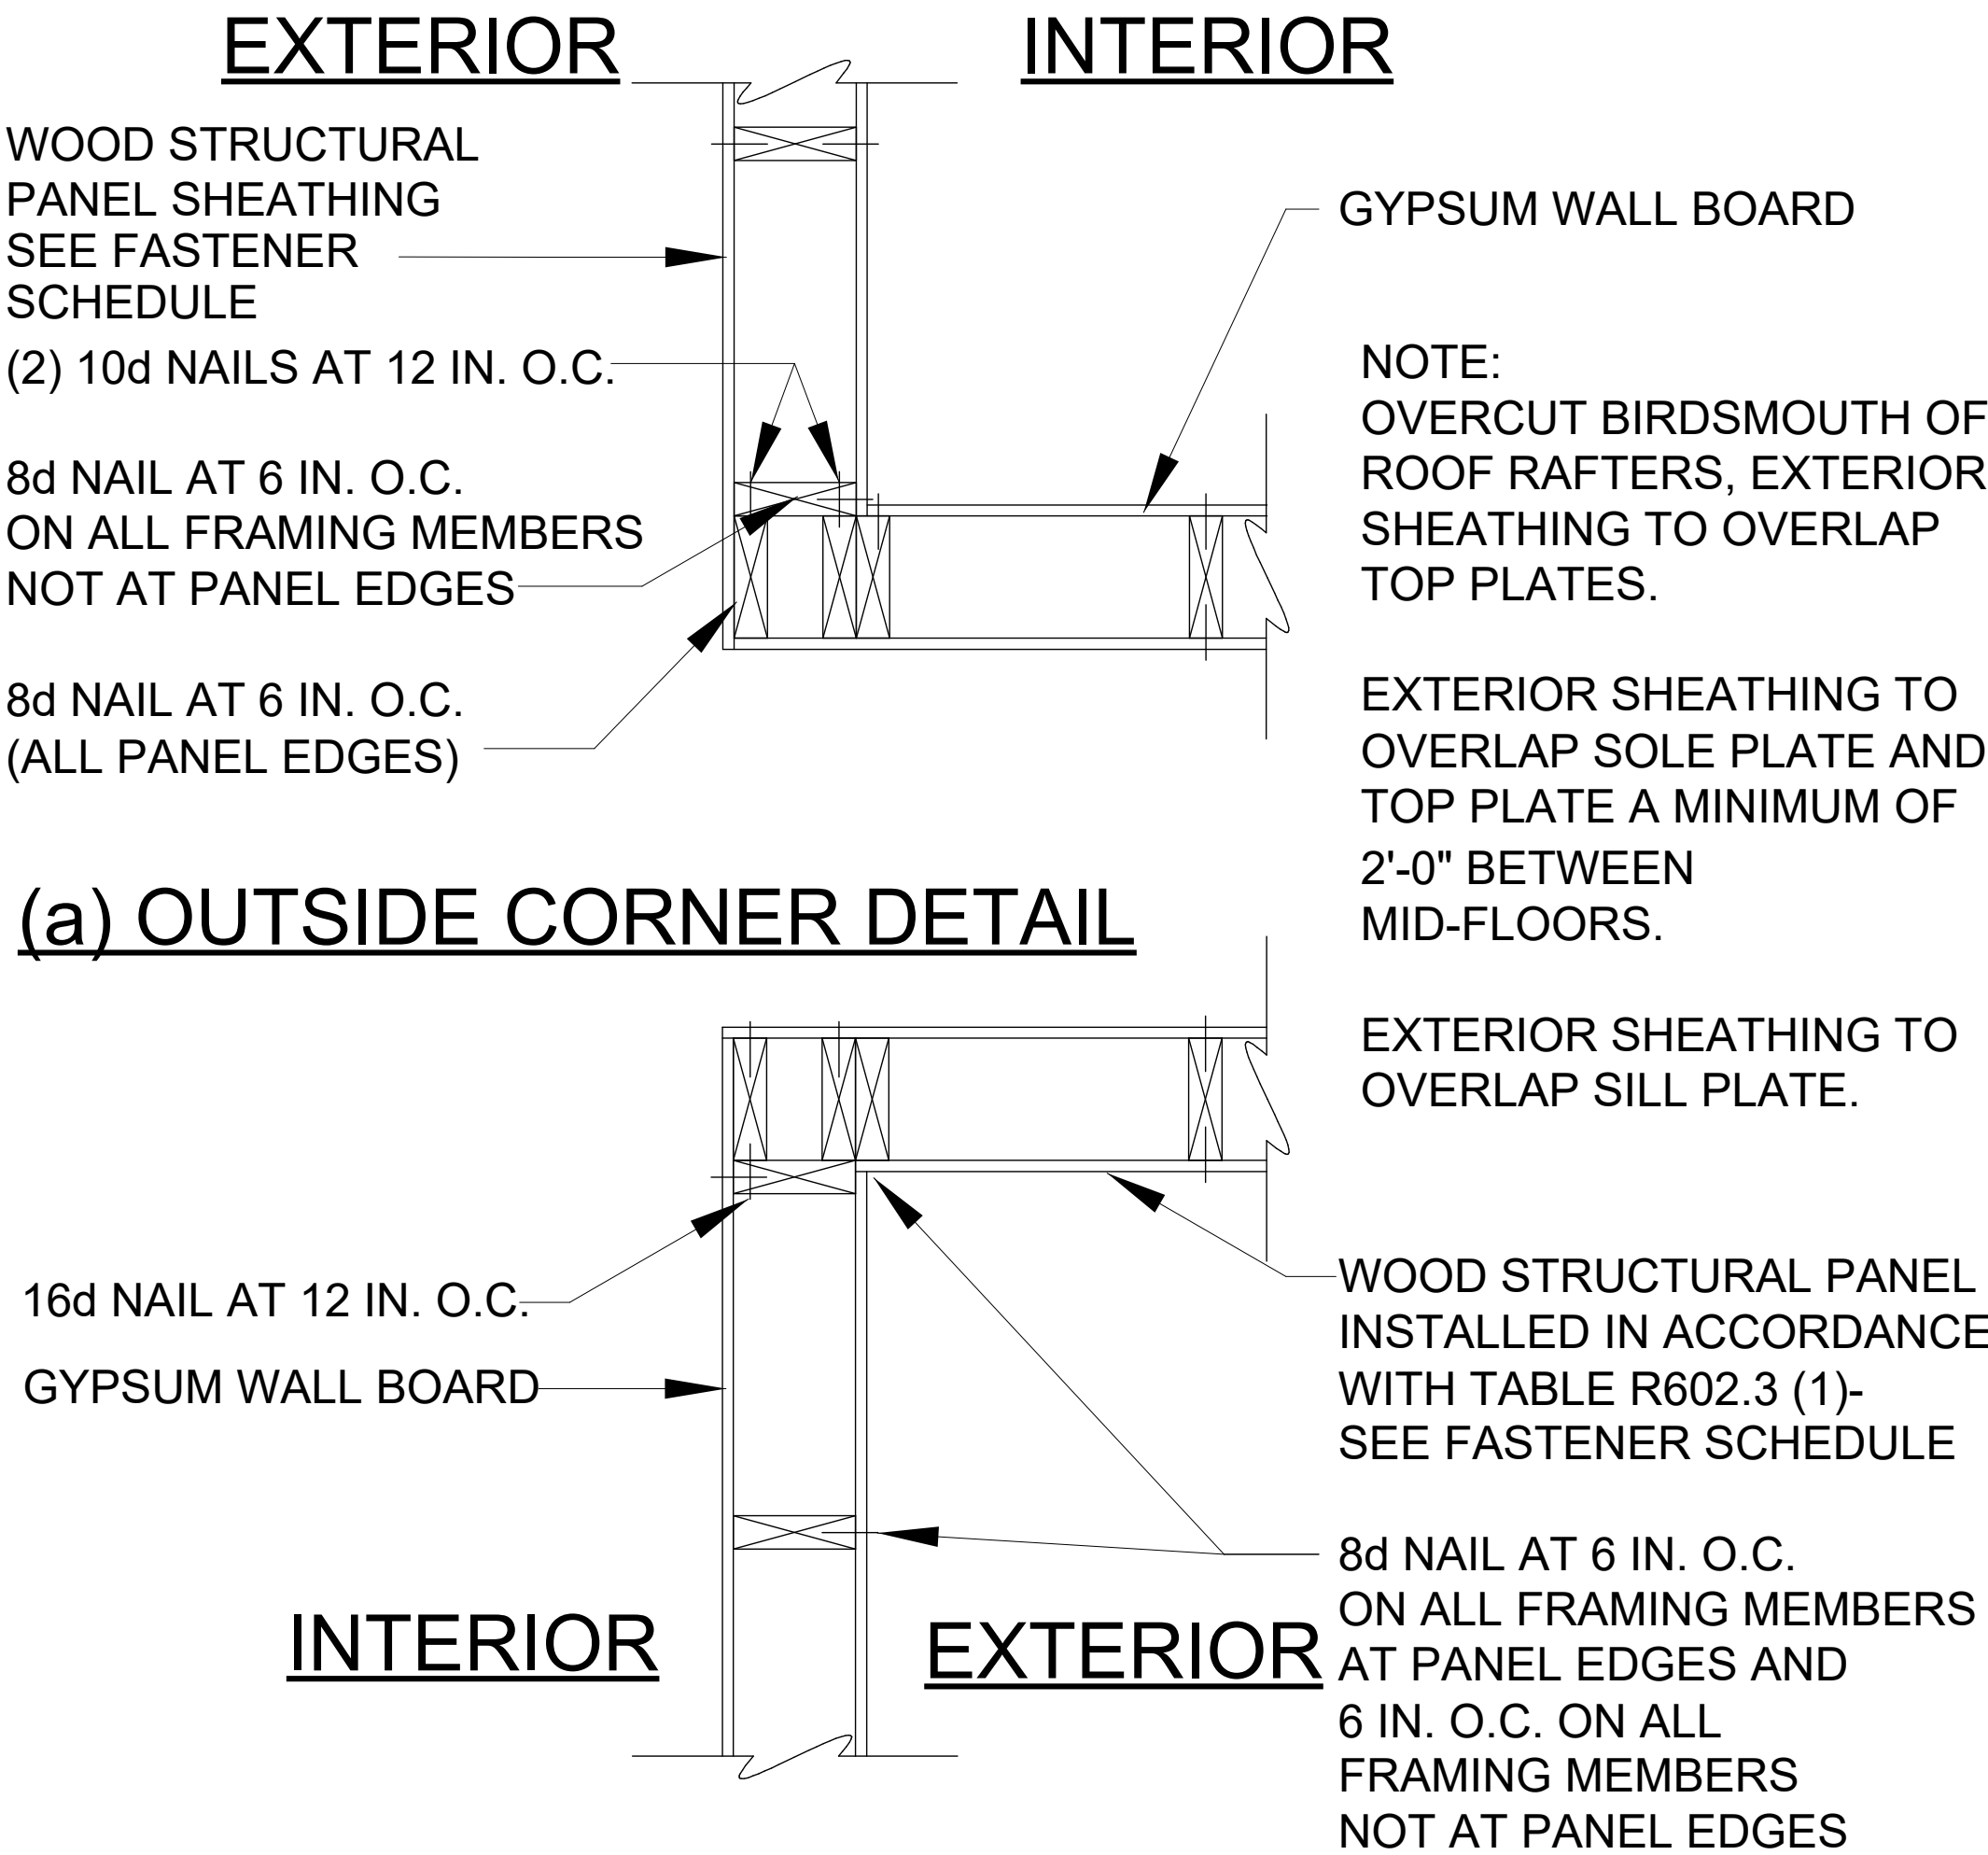


(a) OUTSIDE CORNER DETAIL

(b) INSIDE CORNER DETAIL

4 WALL INTERIOR EXTERIOR DETAIL

1/8" = 1'-0"

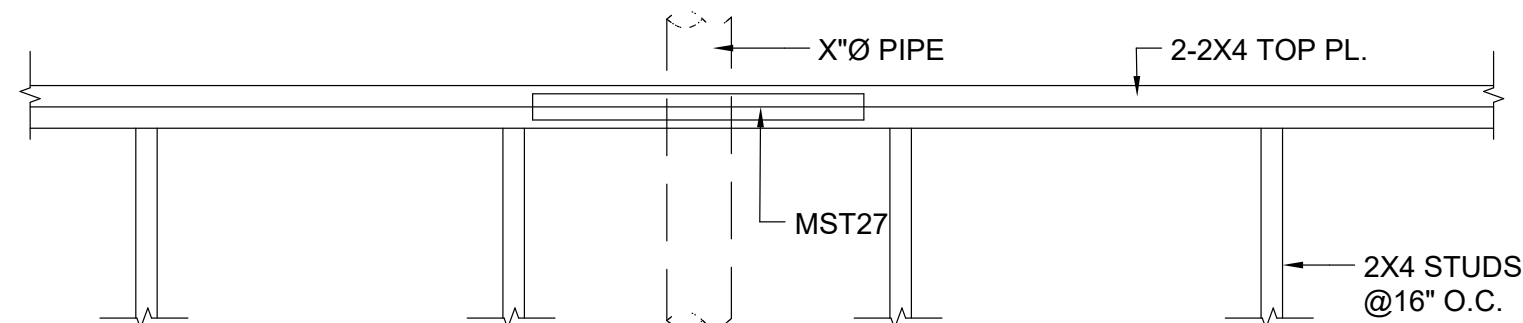

2 PLUMBING SECTION THROUGH WALL

NTS

CLIENT

266 MORRO AVE

NOTES:

ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
WALL DETAILS D

Project number J-1497
Date 28 JAN - 2026
Drawn by AZ
Checked by SF

S10

Scale As indicated




Scale	As indicated
-------	--------------

TABLE R602.3(1)			
FASTENING SCHEDULE			
ITEM	DESCRIPTION OF BUILDING ELEMENTS	NUMBER AND TYPE OF FASTENERa, b, c	SPACING AND LOCATION
Roof			
1	Blocking between ceiling joists or rafters to top plate	4-8d box (21/2" × 0.113"); or 3-8d common (21/2" × 0.131"); or 3-10d box (3" × 0.128"); or 3-3" × 0.131" nails	Toe nail
2	Ceiling joists to top plate	4-8d box (21/2" × 0.113"); or 3-8d common (21/2" × 0.131"); or 3-10d box (3" × 0.128"); or 3-3" × 0.131" nails	Per joist, toe nail
3	Ceiling joist not attached to parallel rafter, laps over partitions (see Section R802.5.2 and Table R802.5.2)	4-10d box (3" × 0.128"); or 3-16d common (31/2" × 0.162"); or 4-3" × 0.131" nails	Face nail
4	Ceiling joist attached to parallel rafter (heel joint) (see Section R802.5.2 and Table R802.5.2)	Table R802.5.2	Face nail
5	Collar tie to rafter, face nail or 11/4" × 20 ga. ridge strap to rafter	4-10d box (3" × 0.128"); or 3-10d common (3" × 0.148"); or 4-3" × 0.131" nails	Face nail each rafter
6	Rafter or roof truss to plate	3-16d box nails (31/2" × 0.135"); or 3-10d common nails (3" × 0.148"); or 4-10d box (3" × 0.128"); or 4-3" × 0.131" nails	2 toe nails on one side and 1 toe nail on opposite side of each rafter or truss
7	Roof rafters to ridge, valley or hip rafters or roof rafter to minimum 2" ridge beam	4-16d (31/2" × 0.135"); or 3-10d common (3" × 0.148"); or 4-10d box (3" × 0.128"); or 4-3" × 0.131" nails 3-16d box 31/2" × 0.135"); or 2-16d common (31/2" × 0.162"); or 3-10d box (3" × 0.128"); or 3-3" × 0.131" nails	Toe nail End nail
Wall			
8	Stud to stud (not at braced wall panels)	16d common (31/2" × 0.162") 10d box (3" × 0.128"); or 3" × 0.131" nails	24" o.c. face nail 16" o.c. face nail
9	Stud to stud and abutting studs at intersecting wall corners (at braced wall panels)	16d box (31/2" × 0.135"); or 3" × 0.131" nails 16d common (31/2" × 0.162")	12" o.c. face nail 16" o.c. face nail
10	Built-up header (2" to 2" header with 1/2" spacer)	16d common (31/2" × 0.162") 16d box (31/2" × 0.135")	16" o.c. each edge face nail 12" o.c. each edge face nail
11	Continuous header to stud	5-8d box (21/2" × 0.113"); or 4-8d common (21/2" × 0.131"); or 4-10d box (3" × 0.128")	Toe nail
12	Top plate to top plate	16d common (31/2" × 0.162") 10d box (3" × 0.128"); or 3" × 0.131" nails	16" o.c. face nail 12" o.c. face nail
13	Double top plate splice	8-16d common (31/2" × 0.162"); or 12-16d box (31/2" × 0.135"); or 12-10d box (3" × 0.128"); or 12-3" × 0.131" nails	Face nail on each side of end joint (minimum 24" lap splice length each side of end joint)
14	Bottom plate to joist, rim joist, band joist or blocking (not at braced wall panels)	16d common (31/2" × 0.162") 16d box (31/2" × 0.135"); or 3" × 0.131" nails	16" o.c. face nail 12" o.c. face nail
15	Bottom plate to joist, rim joist, band joist or blocking (at braced wall panel)	3-16d box (31/2" × 0.135"); or 2-16d (31/2" × 0.162"); or 4-3" × 0.131" nails	3 each 16" o.c. face nail 2 each 16" o.c. face nail 4 each 16" o.c. face nail
16	Top or bottom plate to stud	4-8d box (21/2" × 0.113"); or 3-16d box (31/2" × 0.135"); or 4-8d common (21/2" × 0.131"); or 4-10d box (3" × 0.128"); or 4-3" × 0.131" nails 3-16d box (31/2" × 0.135"); or 2-16d common (31/2" × 0.162"); or 3-10d box (3" × 0.128"); or 3-3" × 0.131" nails	Toe nail End nail
17	Top plates, laps at corners and intersections	3-10d box (3" × 0.128"); or 2-16d common (31/2" × 0.162"); or 3-3" × 0.131" nails	Face nail
18	1" brace to each stud and plate	3-8d box (21/2" × 0.113"); or 2-8d common (21/2" × 0.131"); or 2-10d box (3" × 0.128"); or 2 staples 13/4"	Face nail
19	1" × 6" sheathing to each bearing	3-8d box (21/2" × 0.113"); or 2-8d common (21/2" × 0.131"); or 2-10d box (3" × 0.128"); or 2 staples, 1" crown, 16 ga., 13/4" long	Face nail
20	1" × 8" and wider sheathing to each bearing	3-8d box (21/2" × 0.113"); or 3-8d common (21/2" × 0.131"); or 3-10d box (3" × 0.128"); or 3 staples, 1" crown, 16 ga., 13/4" long Wider than 1" × 8" 4-8d box (21/2" × 0.113"); or 3-8d common (21/2" × 0.131"); or 3-10d box (3" × 0.128"); or 4 staples, 1" crown, 16 ga., 13/4" long	Face nail
Floor			
21	Joist to sill, top plate or girder	4-8d box (21/2" × 0.113"); or 3-8d common (21/2" × 0.131"); or 3-10d box (3" × 0.128"); or 3-3" × 0.131" nails	Toe nail
22	Rim joist, band joist or blocking to sill or top plate (roof applications also)	8d box (21/2" × 0.113") 8d common (21/2" × 0.131"); or 10d box (3" × 0.128"); or 3" × 0.131" nails	4" o.c. toe nail 6" o.c. toe nail
23	1" × 6" subfloor or less to each joist	3-8d box (21/2" × 0.113"); or 2-8d common (21/2" × 0.131"); or 3-10d box (3" × 0.128"); or 2 staples, 1" crown, 16 ga., 13/4" long	Face nail
24	2" subfloor to joist or girder	3-16d box (31/2" × 0.135"); or 2-16d common (31/2" × 0.162")	Blind and face nail
25	2" planks (plank & beam—floor & roof)	3-16d box (31/2" × 0.135"); or 2-16d common (31/2" × 0.162")	At each bearing, face nail
26	Band or rim joist to joist	3-16d common (31/2" × 0.162") 4-10 box (3" × 0.128"); or 4-3" × 0.131" nails; or 4-3" × 14 ga. staples, 7/16" crown	End nail
27	Built-up girders and beams, 2-inch lumber layers	20d common (4" × 0.192"); or 10d box (3" × 0.128"); or 3" × 0.131" nails And: 2-20d common (4" × 0.192"); or 3-10d box (3" × 0.128"); or 3-3" × 0.131" nails	Nail each layer as follows: 32" o.c. at top and bottom and staggered. 24" o.c. face nail at top and bottom staggered on opposite sides Face nail at ends and at each splice
28	Ledger strip supporting joists or rafters	4-16d box (31/2" × 0.135"); or 3-16d common (31/2" × 0.162"); or 4-10d box (3" × 0.128"); or 4-3" × 0.131" nails	At each joist or rafter, face nail
29	Bridging or blocking to joist	2-10d box (3" × 0.128"); or 2-8d common (21/2" × 0.131"); or 2-3" × 0.131" nails	Each end, toe nail

ITEM	DESCRIPTION OF BUILDING ELEMENTS	NUMBER AND TYPE OF FASTENERa, b, c	SPACING OF FASTENERS	
			Edges (inches)h	Intermediate supportsc, e (inches)
Wood structural panels, subfloor, roof and interior wall sheathing to framing and particleboard wall sheathing to framing [see Table R602.3(3) for wood structural panel exterior wall sheathing to wall framing]				
30	3/8" – 1/2"	6d common (2" × 0.113") nail (subfloor, wall); 8d common (21/2" × 0.131") nail (roof); or RSRS-01 (23/8" × 0.113") nail (roof)	6	12f
31	19/32" – 1"	8d common nail (21/2" × 0.131"); or RSRS-01;(23/8" × 0.113") nail (roof)	6	12f
32	11/8" – 11/4"	10d common (3" × 0.148") nail; or 8d (21/2" × 0.131") deformed nail	6	12
Other wall sheathingg				
33	1/2" structural cellulosic fiberboard sheathing	11/2" galvanized roofing nail, 7/16" head diameter, or 11/4" long 16 ga. staple with 7/16" or 1" crown	3	6
34	25/32" structural cellulosic fiberboard sheathing	13/4" galvanized roofing nail, 7/16" head diameter, or 11/2" long 16 ga. staple with 7/16" or 1" crown	3	6
35	1/2" gypsum sheathingd	11/2" galvanized roofing nail; staple galvanized, 11/2" long; 11/4" screws, Type W or S	7	7
36	5/8" gypsum sheathingd	13/4" galvanized roofing nail; staple galvanized, 15/8" long; 15/8" screws, Type W or S	7	7
Wood structural panels, combination subfloor underlayment to framing				
37	3/4" and less	6d deformed (2" × 0.120") nail; or 8d common (21/2" × 0.131") nail	6	12
38	7/8" – 1"	8d common (21/2" × 0.131") nail; or 8d deformed (21/2" × 0.120") nail	6	12
39	11/8" – 11/4"	10d common (3" × 0.148") nail; or 8d deformed (21/2" × 0.120") nail	6	12

1. A. NAILS ARE SMOOTH-COMMON, BOX OR DEFORMED SHANKS EXCEPT WHERE OTHERWISE STATED. NAILS USED FOR FRAMING AND SHEATHING CONNECTIONS SHALL HAVE MINIMUM AVERAGE BENDING YIELD STRENGTHS AS SHOWN: 80 KSI FOR SHANK DIAMETER OF 0.192 INCH (20D COMMON NAIL), 90 KSI FOR SHANK DIAMETERS LARGER THAN 0.142 INCH BUT NOT LARGER THAN 0.177 INCH, AND 100 KSI FOR SHANK DIAMETERS OF 0.142 INCH OR LESS.
2. B. STAPLES ARE 16 GAGE WIRE AND HAVE A MINIMUM 7/16-INCH ON DIAMETER CROWN WIDTH.
3. C. NAILS SHALL BE SPACED AT NOT MORE THAN 6 INCHES ON CENTER AT ALL SUPPORTS WHERE SPANS ARE 48 INCHES OR GREATER.
4. D. FOUR-FOOT BY 8-FOOT OR 4-FOOT BY 9-FOOT PANELS SHALL BE APPLIED VERTICALLY.
5. E. SPACING OF FASTENERS NOT INCLUDED IN THIS TABLE SHALL BE BASED ON TABLE R602.3(2).
6. F. FOR WOOD STRUCTURAL PANEL ROOF SHEATHING ATTACHED TO GABLE END ROOF FRAMING AND TO INTERMEDIATE SUPPORTS WITHIN 48 INCHES OF ROOF EDGES AND RIDGES, NAILS SHALL BE SPACED AT 6 INCHES ON CENTER WHERE THE ULTIMATE DESIGN WIND SPEED IS LESS THAN 130 MPH AND SHALL BE SPACED 4 INCHES ON CENTER WHERE THE ULTIMATE DESIGN WIND SPEED IS 130 MPH OR GREATER BUT LESS THAN 140 MPH.
7. G. GYPSUM SHEATHING SHALL CONFORM TO ASTM C1396 AND SHALL BE INSTALLED IN ACCORDANCE WITH GA 253. FIBERBOARD SHEATHING SHALL CONFORM TO ASTM C208
8. H. SPACING OF FASTENERS ON FLOOR SHEATHING PANEL EDGES APPLIES TO PANEL EDGES SUPPORTED BY FRAMING MEMBERS AND REQUIRED BLOCKING AND AT FLOOR PERIMETERS ONLY. SPACING OF FASTENERS ON ROOF SHEATHING PANEL EDGES APPLIES TO PANEL EDGES SUPPORTED BY FRAMING MEMBERS AND REQUIRED BLOCKING. BLOCKING OF ROOF OR FLOOR SHEATHING PANEL EDGES PERPENDICULAR TO THE FRAMING MEMBERS NEED NOT BE PROVIDED EXCEPT AS REQUIRED BY OTHER PROVISIONS OF THIS CODE. FLOOR PERIMETER SHALL BE SUPPORTED BY FRAMING MEMBERS OR SOLID BLOCKING
9. I. WHERE A RAFTER IS FASTENED TO AN ADJACENT PARALLEL CEILING JOIST IN ACCORDANCE WITH THIS SCHEDULE, PROVIDE TWO TOE NAILS ON ONE SIDE OF THE RAFTER AND TOE NAILS FROM THE CEILING JOIST TO TOP PLATE IN ACCORDANCE WITH THIS SCHEDULE. THE TOE NAIL ON THE OPPOSITE SIDE OF THE RAFTER SHALL NOT BE REQUIRED.
10. J. RSRS-01 IS A ROOF SHEATHING RING SHANK NAIL MEETING THE SPECIFICATIONS IN ASTM F1667

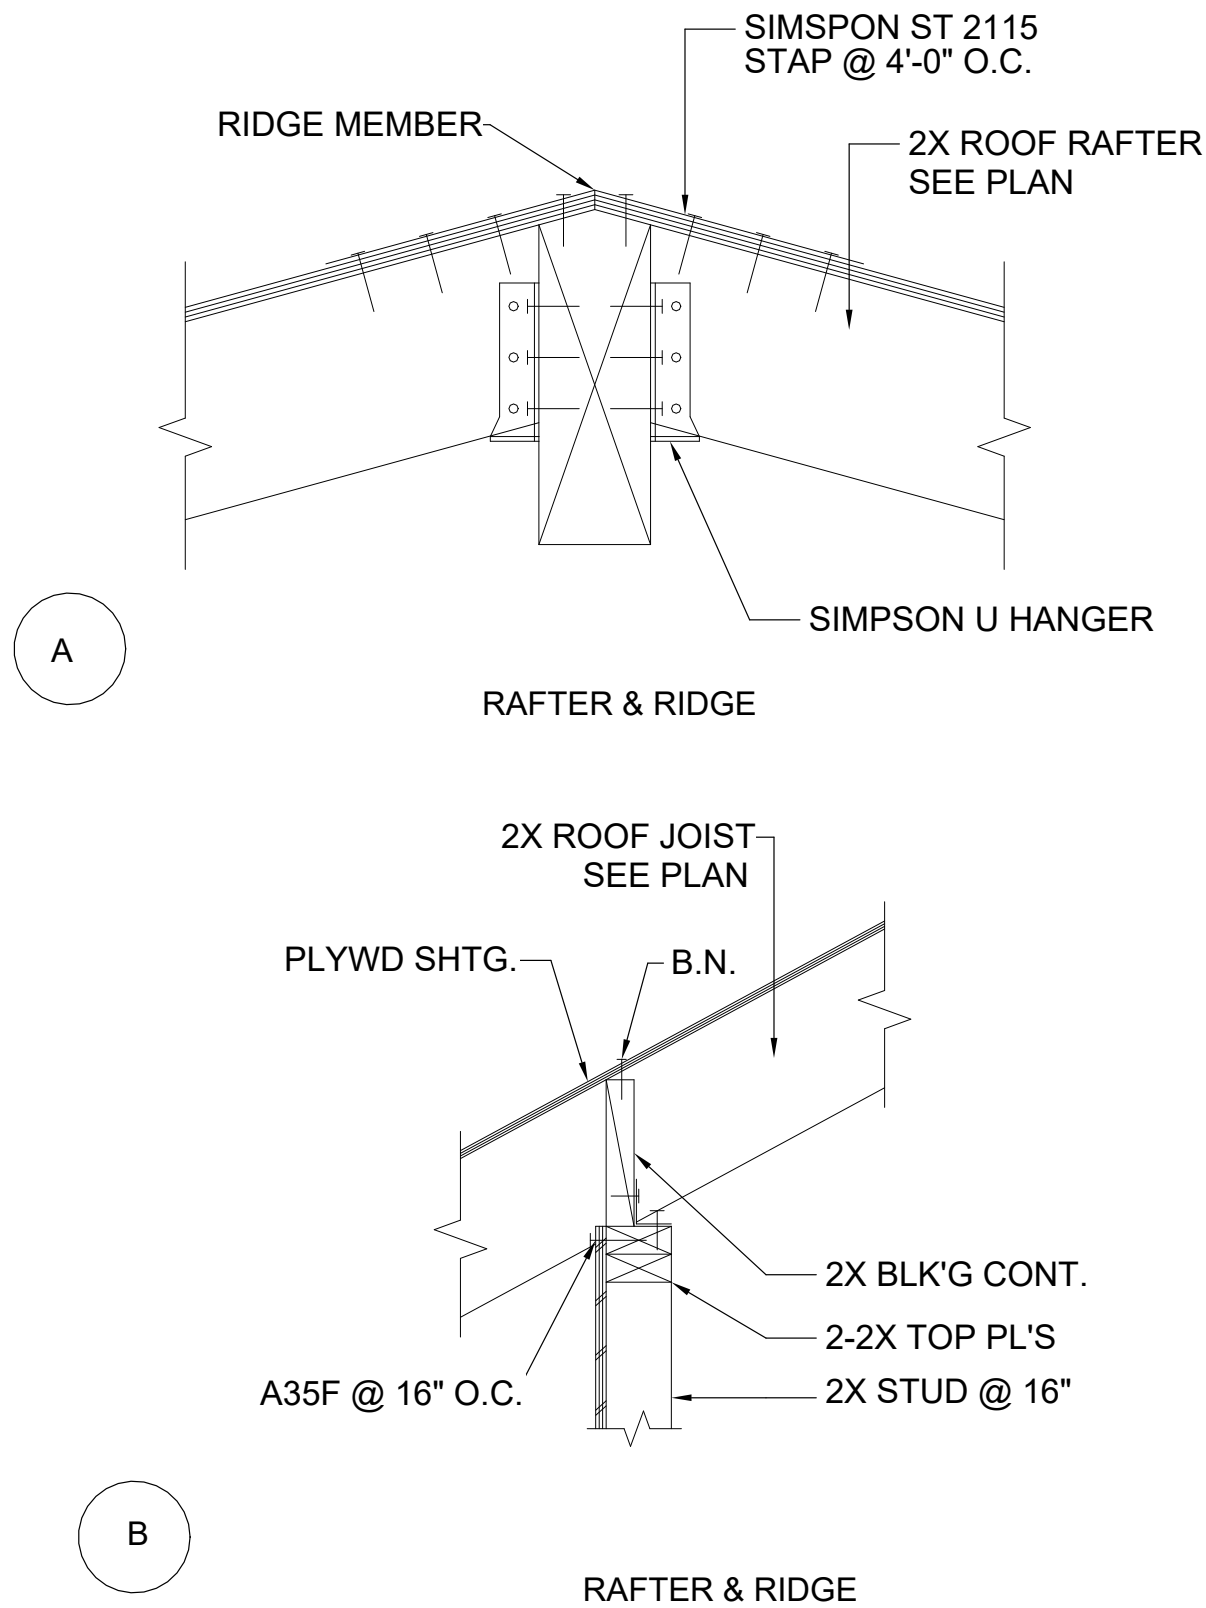

TRUSS HURICANE CONNECTOR SCHEDULE		
TRUSS TYPE	EMBEDDED CONNECTORS REQD BLOCK WALL AND TIE BEAMS	WOOD CONNECTORS REQD WOOD WALLS OR WOOD BEAMS
SINGLE TRUSS 1 PLY	ONE "SIMPSON" HETA16 (OR HETA20) EMBEDDED TRUSS STRAP 6" INTO THE TIE BEAM, WITH (7) - 10D X 1-1/2" GALVANIZED NAILS.	ONE "SIMPSON" H10A CONNECTOR WITH NINE 10D X 1-1/2" GALVANIZED NAILS IN BEAM AND NINE 10D X 1-1/2" NAILS IN TRUSS.
DOUBLE TRUSS 2 PLY	TWO "SIMPSON" HETA16 (OR HETA20) EMBEDDED TRUSS STRAP 6" INTO THE TIE BEAM, WITH (7) - 10D X 1-1/2" GALVANIZED NAILS IN EACH STRAP	TWO "SIMPSON" H8 CONNECTORS. USE 10 @ 10D X1-1/2" GALVANIZED NAILS IN EACH STRAP. IN EACH STRAP .
TRUSS TO TRUSS CONNECTORS	ALL TRUSS TO TRUSS CONNECTORS (HANGERS) HAVE BEEN SPECIFIED BY THE TRUSS ENGINEER TO BE "SIMPSON" HUS26. INSTALL HUS26 HANGERS WITH 20 @ 16D (0.162") X 3-1/2" GALVANIZED NAILS. 14 NAILS IN GIRDER TRUSS AND 6 NAILS IN TRUSS BEING SUPPORTED.	

CLIENT

266 MORRO AVE

NOTES:

ALL UNITS IN FEET AND INCHES
UNLESS OTHER WISE SPECIFIED

DRAWING NAME
DETAILS F

Project number	J-1497
Date	28 JAN - 2026
Drawn by	AZ
Checked by	SF

S12

Scale	As indicated
-------	--------------